



PART NUMBER		SML-LX1206SRC-TR	REV	R
REV	E.C.N. NUMBER AND REVISION COMMENTS		DATE	
A	ADDED TAPE DIRECTION AND POLARITY		11.01.95	
B	E.C.N. #10BRDR. & #10404.		12.18.97	
C	E.C.N. #10566. ADDED REFLOW PROILE.		11.17.99	
D	E.C.N. #10644. & REDRAWN IN 3D.		07.18.00	
E	E.C.N. #10775.		08.14.01	
F	E.C.N. #10784.		09.08.01	
G	E.C.N. #10814.		12.03.01	
H	E.C.N. #10967.		03.14.03	
I	E.C.N. #11065.		12.09.03	
J	E.C.N. #11148.		01.20.05	
K	E.C.N. #11466.		01.07.08	
L	E.C.N. #11509.		05.16.08	
M	E.C.N. #11508.		03.09.08	
N	E.C.N. #11644.		07.19.10	
O	E.C.N. #10BRDR & REDRAWN.		04.20.11	
P	E.C.N. #11829.		08.08.12	

PROFILE

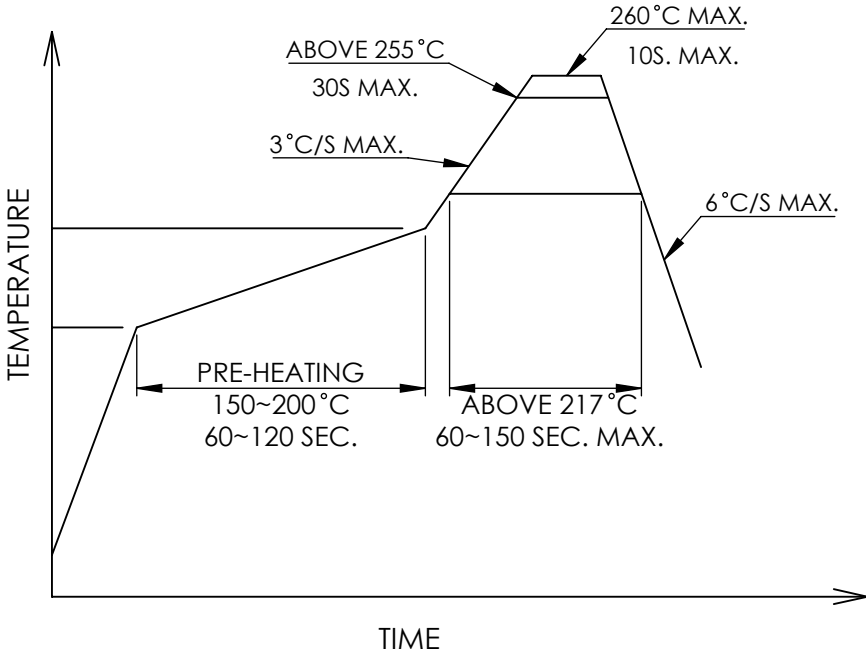

CARRIER TAPE DIMENSION

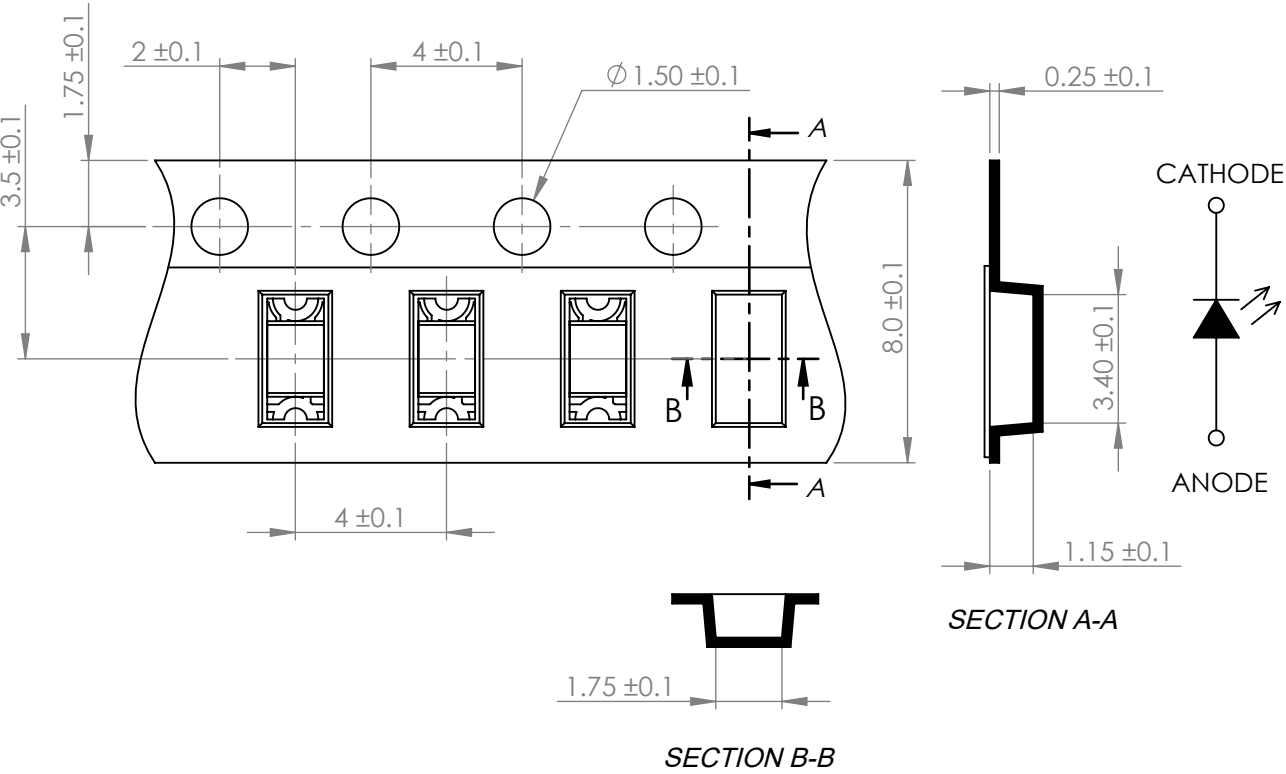

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX.= ^{+0.00}_{-DECIMAL PRECISION}