

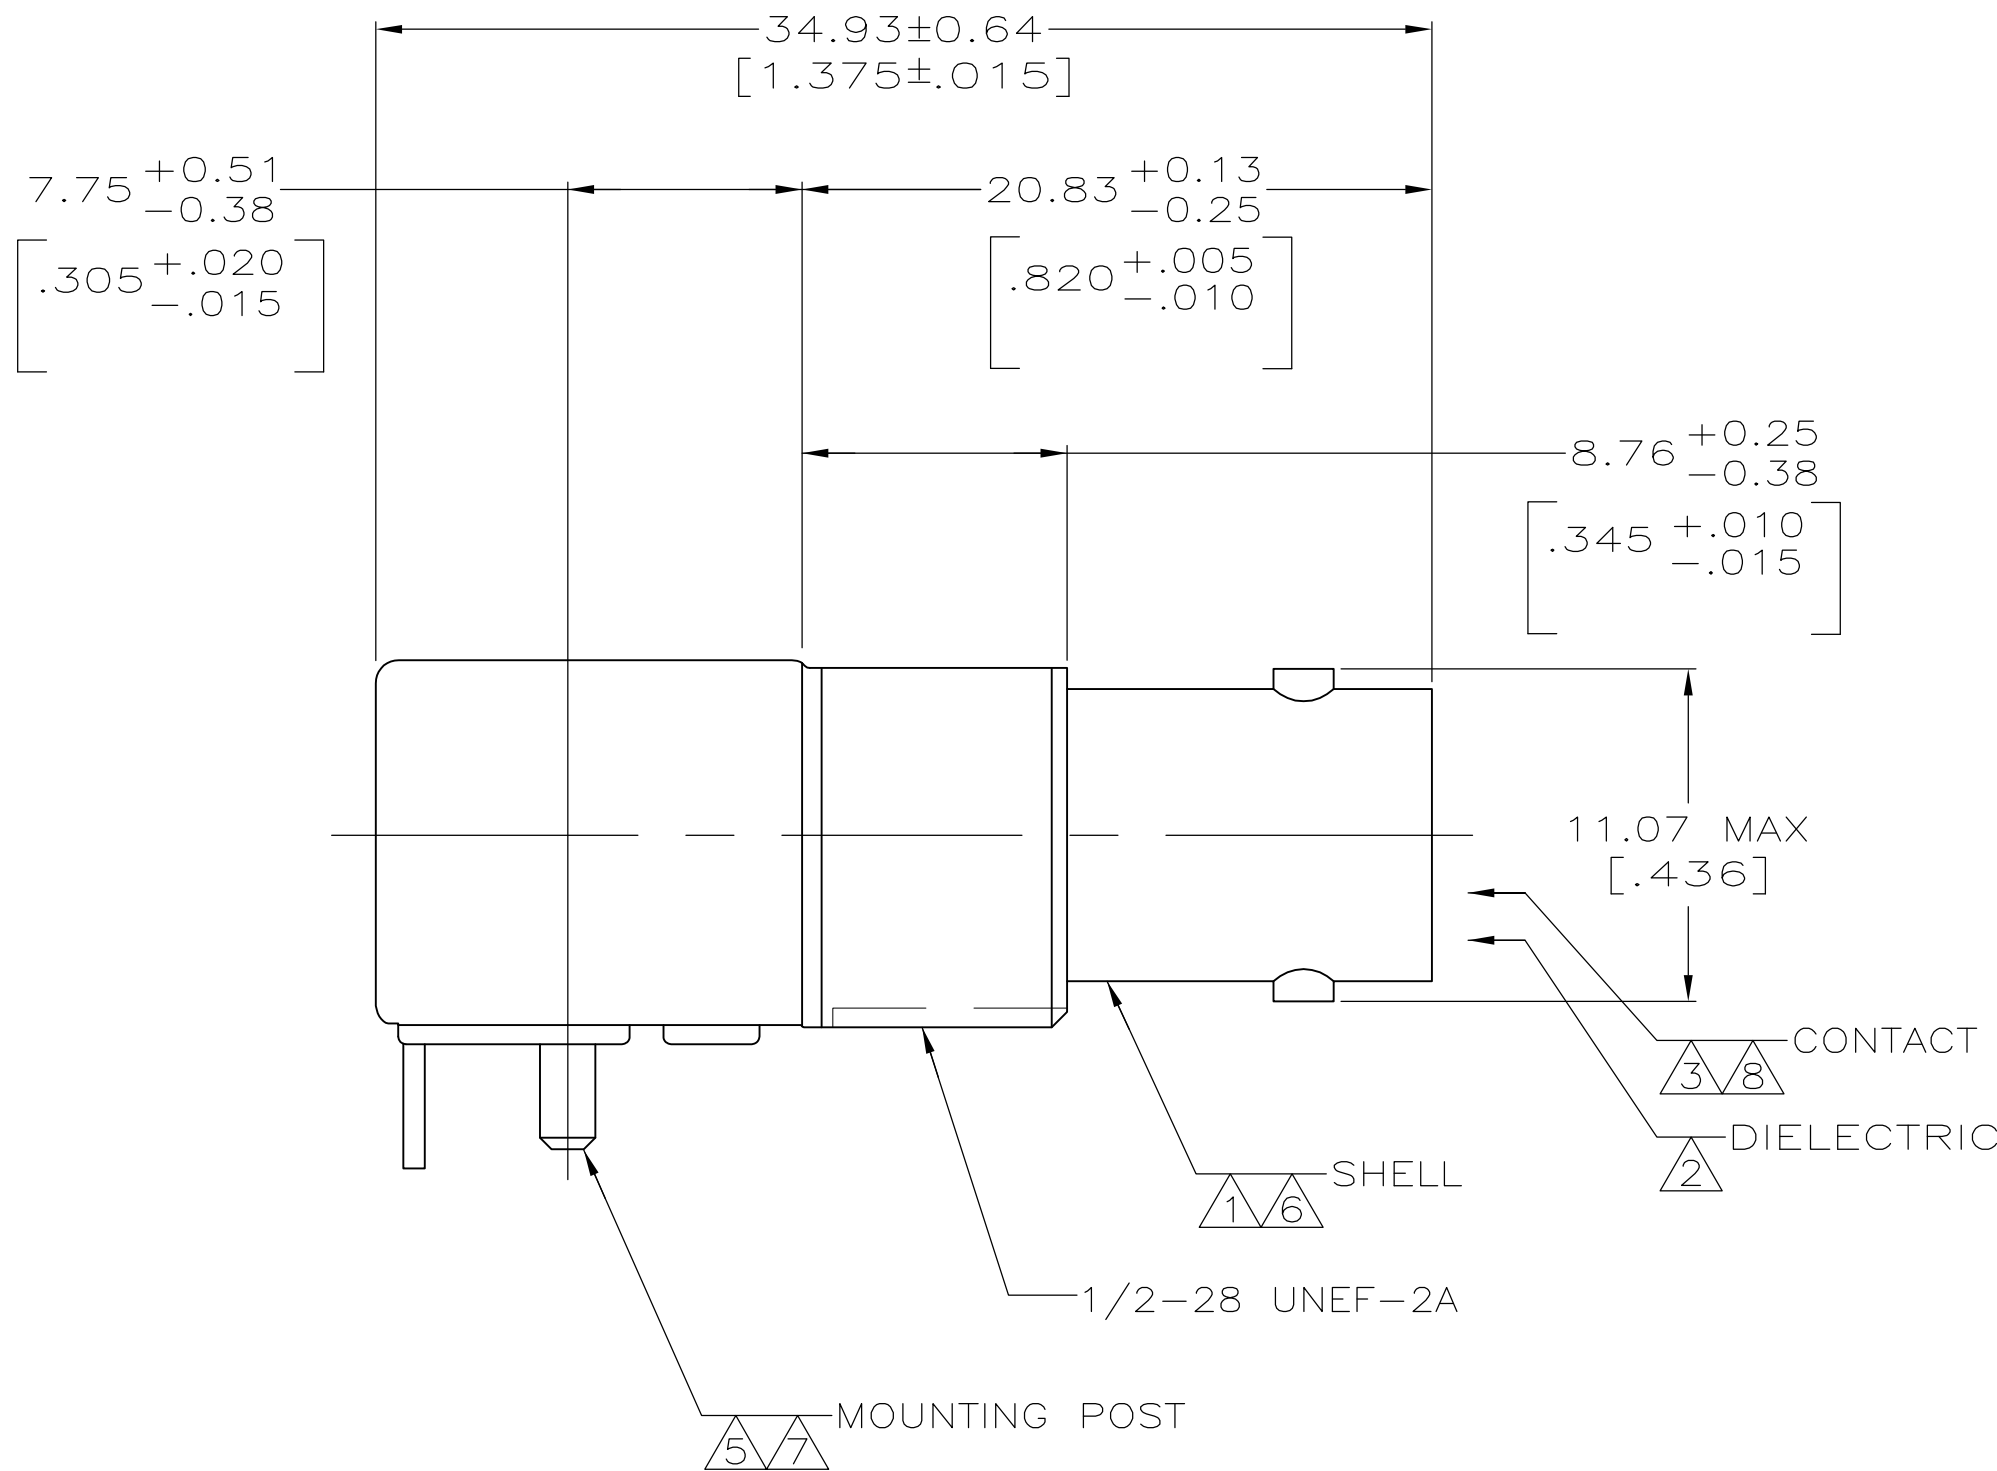



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AJ	16	A1		REVISED PER ECO-11-005030	11MAR11	RK HMR

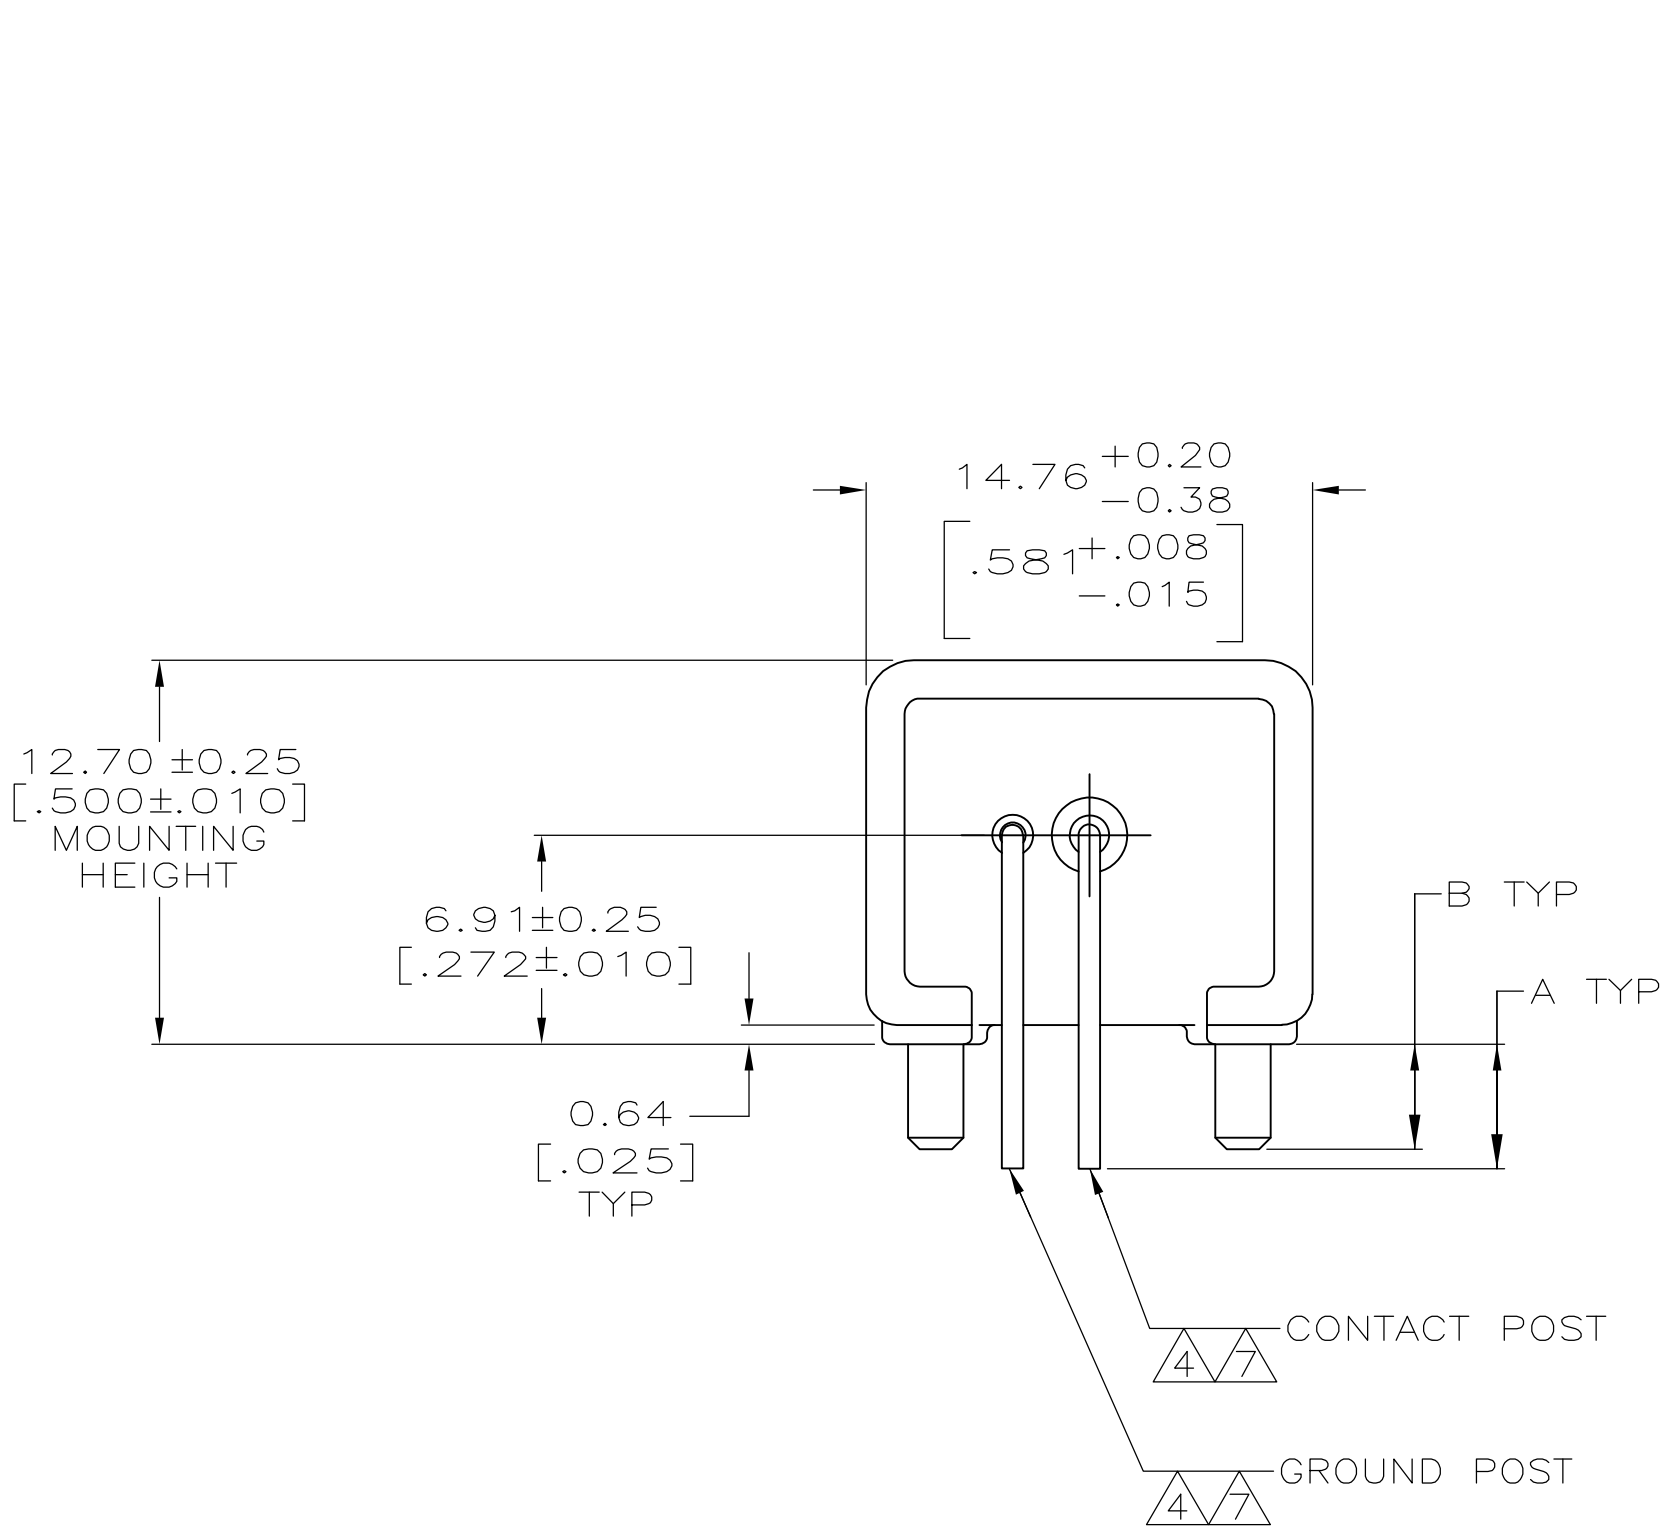

- 1 ZINC PER QQ-Z-363.
- 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3 BERYLLIUM COPPER PER QQ-C-530.
- 4 BRASS PER ASTM-B-453.
- 5 BRASS PER ASTM-B-16.
- 6 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- 7 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 8 GOLD PLATE PER ASTM-B-488, 0.76 μm [.000030] MINIMUM THICK.
9. SEE INSTRUCTION SHEET 408-2769.

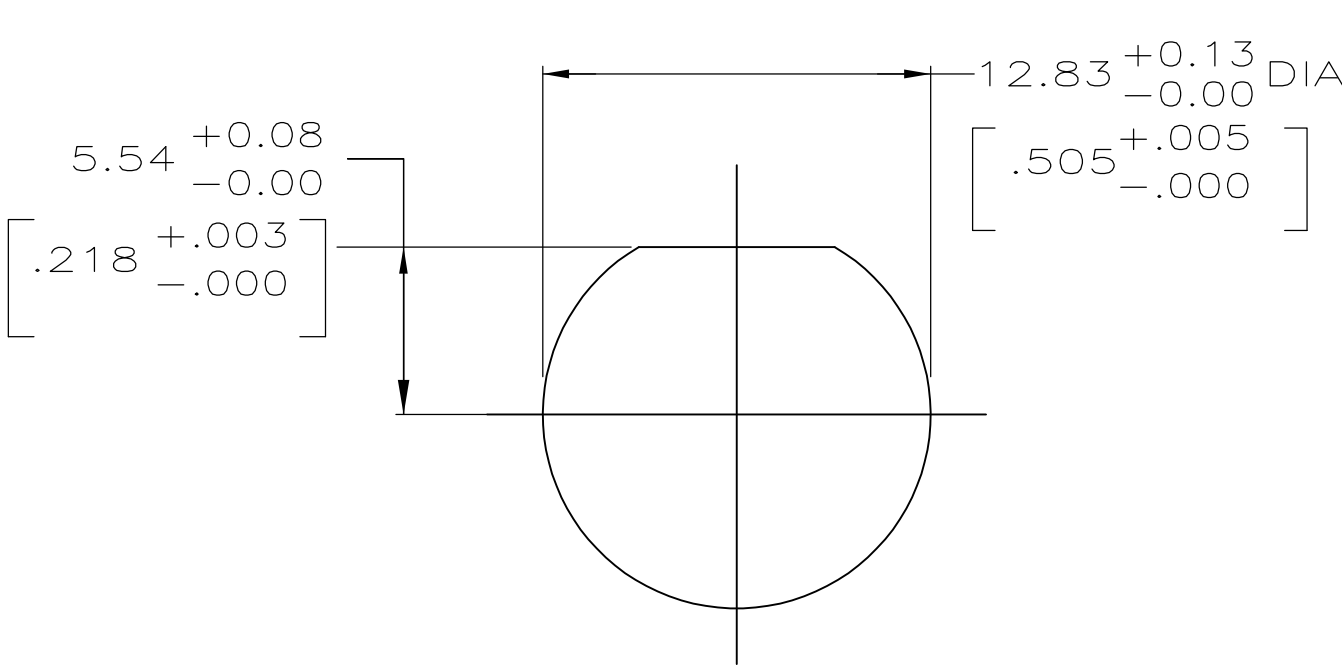

RECOMMENDED PANEL CUTOUT

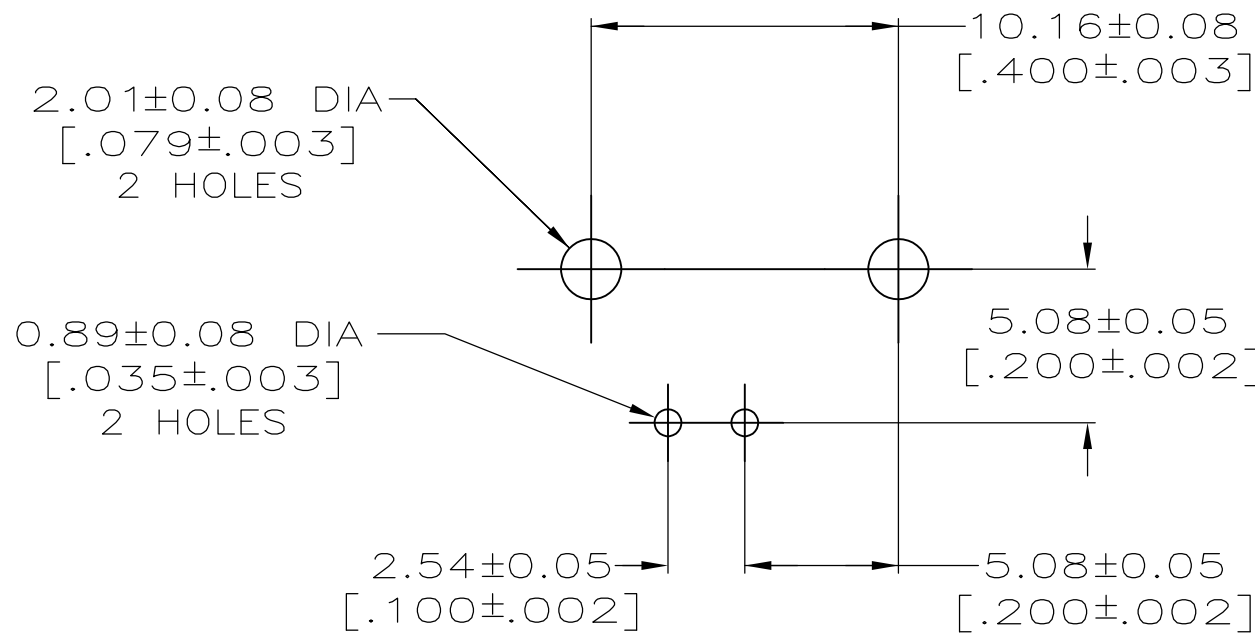

PCB CONFIGURATION

2.03±0.13 [.080±.005]	2.29±0.13 [.090±.005]	5414907-3
2.03±0.13 [.080±.005]	2.79±0.25 [.110±.010]	5414907-2
3.48±0.25 [.137±.010]	4.11±0.43 [.162±.017]	5414907-1
B		A
		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - DOCK5	 TE Connectivity		
		CHK J. HAVENER			
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. LIPPERT	NAME	JACK, RIGHT ANGLE, 75 OHM, LOW PROFILE, PCB, BNC	
	0. PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	1. PLC ± -	APPLICATION SPEC			
	2. PLC ± 0.20 [.008]	WEIGHT	A1		00779
	3. PLC ± -		C=5414907		-
MATERIAL SEE NOTES 1 - 5	FINISH SEE NOTES 6 - 8	CUSTOMER DRAWING	SCALE	5:1	SHEET 1 OF 1
			REV	A1	