



## Connection Diagrams

Pin Assignment for SSOP and TSSOP

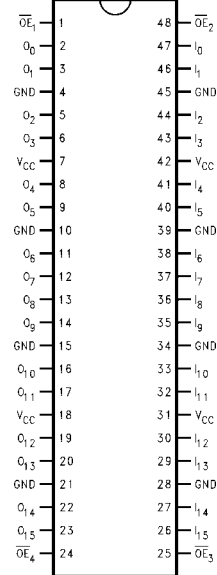


Pin Assignment for FBGA



(Top Thru View)

## Logic Diagram

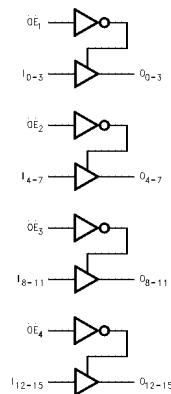

## Pin Descriptions

| Pin Names         | Description                       |
|-------------------|-----------------------------------|
| $\overline{OE}_n$ | Output Enable Inputs (Active LOW) |
| $I_0-I_{15}$      | Inputs                            |
| $O_0-O_{15}$      | Outputs                           |
| NC                | No Connect                        |

## FBGA Pin Assignments

|          | 1        | 2        | 3                 | 4                 | 5        | 6        |
|----------|----------|----------|-------------------|-------------------|----------|----------|
| <b>A</b> | $O_0$    | NC       | $\overline{OE}_1$ | $\overline{OE}_2$ | NC       | $I_0$    |
| <b>B</b> | $O_2$    | $O_1$    | NC                | NC                | $I_1$    | $I_2$    |
| <b>C</b> | $O_4$    | $O_3$    | $V_{CC}$          | $V_{CC}$          | $I_3$    | $I_4$    |
| <b>D</b> | $O_6$    | $O_5$    | GND               | GND               | $I_5$    | $I_6$    |
| <b>E</b> | $O_8$    | $O_7$    | GND               | GND               | $I_7$    | $I_8$    |
| <b>F</b> | $O_{10}$ | $O_9$    | GND               | GND               | $I_9$    | $I_{10}$ |
| <b>G</b> | $O_{12}$ | $O_{11}$ | $V_{CC}$          | $V_{CC}$          | $I_{11}$ | $I_{12}$ |
| <b>H</b> | $O_{14}$ | $O_{13}$ | NC                | NC                | $I_{13}$ | $I_{14}$ |
| <b>J</b> | $O_{15}$ | NC       | $\overline{OE}_4$ | $\overline{OE}_3$ | NC       | $I_{15}$ |

## Truth Table

| Inputs            |                 | Outputs         |
|-------------------|-----------------|-----------------|
| $\overline{OE}_1$ | $I_0-I_3$       | $O_0-O_3$       |
| L                 | L               | L               |
| L                 | H               | H               |
| H                 | X               | Z               |
| Inputs            |                 | Outputs         |
| $\overline{OE}_2$ | $I_4-I_7$       | $O_4-O_7$       |
| L                 | L               | L               |
| L                 | H               | H               |
| H                 | X               | Z               |
| Inputs            |                 | Outputs         |
| $\overline{OE}_3$ | $I_8-I_{11}$    | $O_8-O_{11}$    |
| L                 | L               | L               |
| L                 | H               | H               |
| H                 | X               | Z               |
| Inputs            |                 | Outputs         |
| $\overline{OE}_4$ | $I_{12}-I_{15}$ | $O_{12}-O_{15}$ |
| L                 | L               | L               |
| L                 | H               | H               |
| H                 | X               | Z               |

H = High Voltage Level  
 L = Low Voltage Level  
 X = Immaterial  
 Z = High Impedance

## Functional Description

The LVT16244 and LVTH16244 contain sixteen non-inverting buffers with 3-STATE outputs. The device is nibble (4-bits) controlled with each nibble functioning identically, but independent of the other. The control pins can be shorted together to obtain full 16-bit operation.

| Absolute Maximum Ratings <sup>(Note 3)</sup> |                                  |              |                                                       |       |
|----------------------------------------------|----------------------------------|--------------|-------------------------------------------------------|-------|
| Symbol                                       | Parameter                        | Value        | Conditions                                            | Units |
| V <sub>CC</sub>                              | Supply Voltage                   | −0.5 to +4.6 |                                                       | V     |
| V <sub>I</sub>                               | DC Input Voltage                 | −0.5 to +7.0 |                                                       | V     |
| V <sub>O</sub>                               | Output Voltage                   | −0.5 to +7.0 | Output in 3-STATE                                     | V     |
|                                              |                                  | −0.5 to +7.0 | Output in HIGH or LOW State (Note 4)                  |       |
| I <sub>IK</sub>                              | DC Input Diode Current           | −50          | V <sub>I</sub> < GND                                  | mA    |
| I <sub>OK</sub>                              | DC Output Diode Current          | −50          | V <sub>O</sub> < GND                                  | mA    |
| I <sub>O</sub>                               | DC Output Current                | 64           | V <sub>O</sub> > V <sub>CC</sub> Output at HIGH State | mA    |
|                                              |                                  | 128          | V <sub>O</sub> > V <sub>CC</sub> Output at LOW State  |       |
| I <sub>CC</sub>                              | DC Supply Current per Supply Pin | ±64          |                                                       | mA    |
| I <sub>GND</sub>                             | DC Ground Current per Ground Pin | ±128         |                                                       | mA    |
| T <sub>STG</sub>                             | Storage Temperature              | −65 to +150  |                                                       | °C    |

Recommended Operating Conditions

| Symbol          | Parameter                                                            | Min | Max | Units |
|-----------------|----------------------------------------------------------------------|-----|-----|-------|
| V <sub>CC</sub> | Supply Voltage                                                       | 2.7 | 3.6 | V     |
| V <sub>I</sub>  | Input Voltage                                                        | 0   | 5.5 | V     |
| I <sub>OH</sub> | HIGH Level Output Current                                            |     | −32 | mA    |
| I <sub>OL</sub> | LOW Level Output Current                                             |     | 64  | mA    |
| T <sub>A</sub>  | Free Air Operating Temperature                                       | −40 | +85 | °C    |
| Δt/ΔV           | Input Edge Rate, V <sub>IN</sub> = 0.8V–2.0V, V <sub>CC</sub> = 3.0V | 0   | 10  | ns/V  |

Note 3: Absolute Maximum continuous ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute maximum rated conditions is not implied.

Note 4: I<sub>O</sub> Absolute Maximum Rating must be observed.

DC Electrical Characteristics

| Symbol                           | Parameter                                           | V <sub>CC</sub><br>(V) | T <sub>A</sub> = −40°C to +85°C |      | Units                            | Conditions                                                               |
|----------------------------------|-----------------------------------------------------|------------------------|---------------------------------|------|----------------------------------|--------------------------------------------------------------------------|
|                                  |                                                     |                        | Min                             | Max  |                                  |                                                                          |
| V <sub>IK</sub>                  | Input Clamp Diode Voltage                           | 2.7                    |                                 | −1.2 | V                                | I <sub>I</sub> = −18 mA                                                  |
| V <sub>IH</sub>                  | Input HIGH Voltage                                  | 2.7–3.6                | 2.0                             |      | V                                | V <sub>O</sub> ≤ 0.1V or                                                 |
| V <sub>IL</sub>                  | Input LOW Voltage                                   | 2.7–3.6                |                                 | 0.8  | V                                | V <sub>O</sub> ≥ V <sub>CC</sub> − 0.1V                                  |
| V <sub>OH</sub>                  | Output HIGH Voltage                                 | 2.7–3.6                | V <sub>CC</sub> − 0.2           |      | V                                | I <sub>OH</sub> = −100 μA                                                |
|                                  |                                                     | 2.7                    | 2.4                             |      |                                  | I <sub>OH</sub> = −8 mA                                                  |
|                                  |                                                     | 3.0                    | 2.0                             |      |                                  | I <sub>OH</sub> = −32 mA                                                 |
| V <sub>OL</sub>                  | Output LOW Voltage                                  | 2.7                    |                                 | 0.2  | V                                | I <sub>OL</sub> = 100 μA                                                 |
|                                  |                                                     | 2.7                    |                                 | 0.5  |                                  | I <sub>OL</sub> = 24 mA                                                  |
|                                  |                                                     | 3.0                    |                                 | 0.4  |                                  | I <sub>OL</sub> = 16 mA                                                  |
|                                  |                                                     | 3.0                    |                                 | 0.5  |                                  | I <sub>OL</sub> = 32 mA                                                  |
|                                  |                                                     | 3.0                    |                                 | 0.55 |                                  | I <sub>OL</sub> = 64 mA                                                  |
| I <sub>I(HOLD)</sub><br>(Note 5) | Bushold Input Minimum Drive                         | 3.0                    | 75                              |      | μA                               | V <sub>I</sub> = 0.8V                                                    |
|                                  |                                                     |                        | −75                             |      |                                  | V <sub>I</sub> = 2.0V                                                    |
| I <sub>I(OD)</sub><br>(Note 5)   | Bushold Input Over-Drive<br>Current to Change State | 3.0                    | 500                             |      | μA                               | (Note 6)                                                                 |
|                                  |                                                     |                        | −500                            |      |                                  | (Note 7)                                                                 |
| I <sub>I</sub>                   | Input Current                                       | 3.6                    |                                 | 10   | μA                               | V <sub>I</sub> = 5.5V                                                    |
|                                  |                                                     | Control Pins           | 3.6                             | ±1   |                                  | V <sub>I</sub> = 0V or V <sub>CC</sub>                                   |
|                                  |                                                     |                        | Data Pins                       | 3.6  |                                  | −5                                                                       |
|                                  |                                                     |                        |                                 | 1    | V <sub>I</sub> = V <sub>CC</sub> |                                                                          |
| I <sub>OFF</sub>                 | Power Off Leakage Current                           | 0                      |                                 | ±100 | μA                               | 0V ≤ V <sub>I</sub> or V <sub>O</sub> ≤ 5.5V                             |
| I <sub>PU/ID</sub>               | Power Up/Down<br>3-STATE Current                    | 0 – 1.5V               |                                 | ±100 | μA                               | V <sub>O</sub> = 0.5V to 3.0V<br>V <sub>I</sub> = GND or V <sub>CC</sub> |
| I <sub>OZL</sub>                 | 3-STATE Output Leakage Current                      | 3.6                    |                                 | −5   | μA                               | V <sub>O</sub> = 0.5V                                                    |
| I <sub>OZH</sub>                 | 3-STATE Output Leakage Current                      | 3.6                    |                                 | 5    | μA                               | V <sub>O</sub> = 3.0V                                                    |
| I <sub>OZH</sub> <sup>+</sup>    | 3-STATE Output Leakage Current                      | 3.6                    |                                 | 10   | μA                               | V <sub>CC</sub> < V <sub>O</sub> ≤ 5.5V                                  |

## DC Electrical Characteristics (Continued)

| Symbol                        | Parameter                                    | V <sub>CC</sub><br>(V) | T <sub>A</sub> = -40°C to +85°C |      | Units | Conditions                                                                    |
|-------------------------------|----------------------------------------------|------------------------|---------------------------------|------|-------|-------------------------------------------------------------------------------|
|                               |                                              |                        | Min                             | Max  |       |                                                                               |
| I <sub>CCH</sub>              | Power Supply Current                         | 3.6                    |                                 | 0.19 | mA    | Outputs High                                                                  |
| I <sub>CCL</sub>              | Power Supply Current                         | 3.6                    |                                 | 5.0  | mA    | Outputs Low                                                                   |
| I <sub>CCZ</sub>              | Power Supply Current                         | 3.6                    |                                 | 0.19 | mA    | Outputs Disabled                                                              |
| I <sub>CCZ</sub> <sup>†</sup> | Power Supply Current                         | 3.6                    |                                 | 0.19 | mA    | V <sub>CC</sub> ≤ V <sub>O</sub> ≤ 5.5V,<br>Outputs Disabled                  |
| ΔI <sub>CC</sub>              | Increase in Power Supply Current<br>(Note 8) | 3.6                    |                                 | 0.2  | mA    | One Input at V <sub>CC</sub> - 0.6V<br>Other Inputs at V <sub>CC</sub> or GND |

**Note 5:** Applies to bushold versions only (LVTH16244).

**Note 6:** An external driver must source at least the specified current to switch from LOW-to-HIGH.

**Note 7:** An external driver must sink at least the specified current to switch from HIGH-to-LOW.

**Note 8:** This is the increase in supply current for each input that is at the specified voltage level rather than V<sub>CC</sub> or GND.

## Dynamic Switching Characteristics (Note 9)

| Symbol           | Parameter                                    | V <sub>CC</sub><br>(V) | T <sub>A</sub> = 25°C |      |     | Units | Conditions<br>C <sub>L</sub> = 50 pF, R <sub>L</sub> = 500Ω |
|------------------|----------------------------------------------|------------------------|-----------------------|------|-----|-------|-------------------------------------------------------------|
|                  |                                              |                        | Min                   | Typ  | Max |       |                                                             |
| V <sub>OLP</sub> | Quiet Output Maximum Dynamic V <sub>OL</sub> | 3.3                    |                       | 0.8  |     | V     | (Note 10)                                                   |
| V <sub>OLV</sub> | Quiet Output Minimum Dynamic V <sub>OL</sub> | 3.3                    |                       | -0.8 |     | V     | (Note 10)                                                   |

**Note 9:** Characterized in SSOP package. Guaranteed parameter, but not tested.

**Note 10:** Max number of outputs defined as (n). n-1 data inputs are driven 0V to 3V. Output under test held LOW.

## AC Electrical Characteristics


| Symbol            | Parameter                          | T <sub>A</sub> = -40°C to +85°C<br>C <sub>L</sub> = 50 pF, R <sub>L</sub> = 500Ω |     |                        |     | Units |
|-------------------|------------------------------------|----------------------------------------------------------------------------------|-----|------------------------|-----|-------|
|                   |                                    | V <sub>CC</sub> = 3.3V ± 0.3V                                                    |     | V <sub>CC</sub> = 2.7V |     |       |
|                   |                                    | Min                                                                              | Max | Min                    | Max |       |
| t <sub>PLH</sub>  | Propagation Delay Data to Output   | 1.2                                                                              | 3.5 | 1.2                    | 3.9 | ns    |
| t <sub>PHL</sub>  |                                    | 1.2                                                                              | 3.5 | 1.2                    | 3.9 |       |
| t <sub>PZH</sub>  | Output Enable Time                 | 1.2                                                                              | 4.0 | 1.2                    | 5.0 | ns    |
| t <sub>PZL</sub>  |                                    | 1.2                                                                              | 5.0 | 1.2                    | 6.5 |       |
| t <sub>PHZ</sub>  | Output Disable Time                | 2.0                                                                              | 4.7 | 2.0                    | 5.2 | ns    |
| t <sub>PLZ</sub>  |                                    | 1.5                                                                              | 4.2 | 1.5                    | 4.4 |       |
| t <sub>OSHL</sub> | Output to Output Skew<br>(Note 11) |                                                                                  | 1.0 |                        | 1.0 | ns    |
| t <sub>OSLH</sub> |                                    |                                                                                  |     |                        |     |       |

**Note 11:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

## Capacitance (Note 12)

| Symbol           | Parameter          | Conditions                                                     | Typical | Units |
|------------------|--------------------|----------------------------------------------------------------|---------|-------|
| C <sub>IN</sub>  | Input Capacitance  | V <sub>CC</sub> = 0V, V <sub>I</sub> = 0V or V <sub>CC</sub>   | 4       | pF    |
| C <sub>OUT</sub> | Output Capacitance | V <sub>CC</sub> = 3.0V, V <sub>O</sub> = 0V or V <sub>CC</sub> | 8       | pF    |

**Note 12:** Capacitance is measured at frequency f = 1 MHz, per MIL-STD-883, Method 3012.

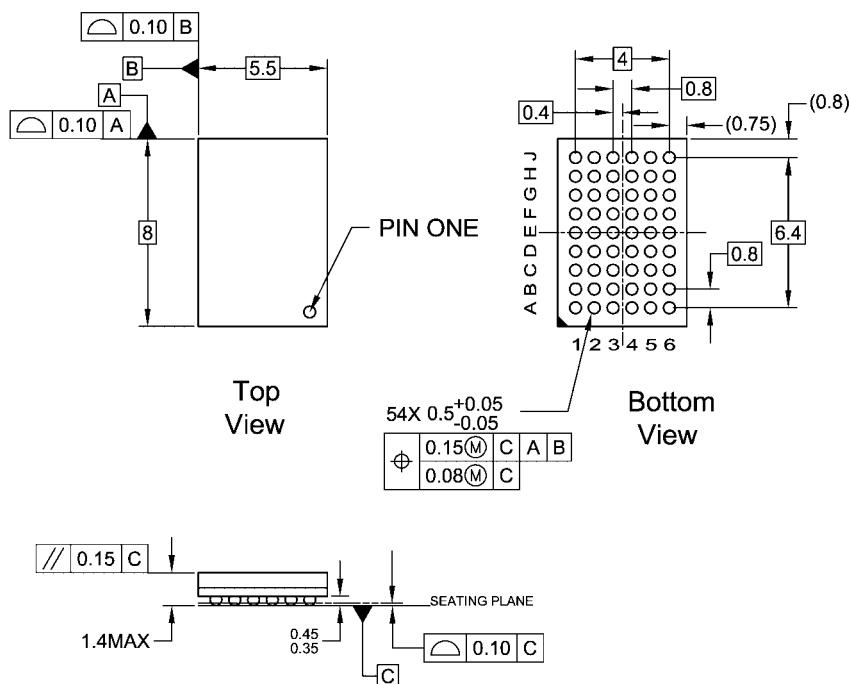**Physical Dimensions** inches (millimeters) unless otherwise noted**NOTES:**

- A. THIS PACKAGE CONFORMS TO JEDEC MO-205
- B. ALL DIMENSIONS IN MILLIMETERS
- C. LAND PATTERN RECOMMENDATION: NSMD (Non Solder Mask Defined)  
.35MM DIA PADS WITH A SOLDERMASK OPENING OF .45MM CONCENTRIC TO PADS
- D. DRAWING CONFORMS TO ASME Y14.5M-1994

BGA54ArevD

**54-Ball Fine-Pitch Ball Grid Array (FBGA), JEDEC MO-205, 5.5mm Wide  
Package Number BGA54A**

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

