
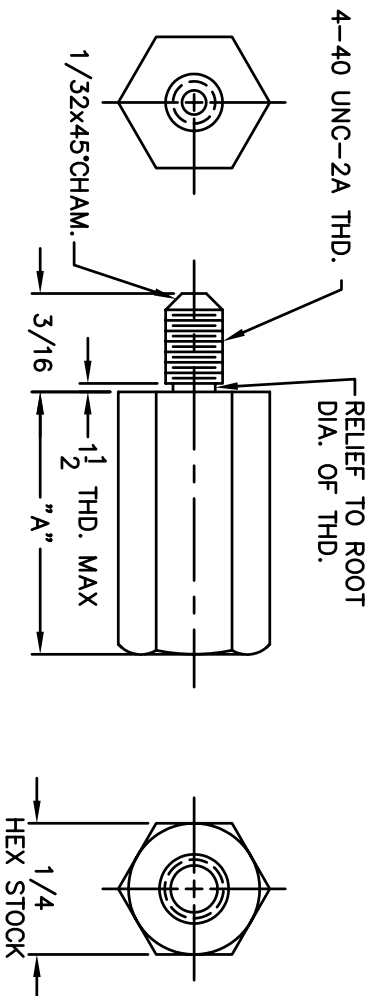


NOTE:

- 1.) ALL DIMENSIONS
APPLY BEFORE PLATING
- 2.) THDS SHALL BE TO GAUGE FIT AFTER
PLATING OR OTHER FINISH
- 3.) SURFACE SHALL BE SMOOTH, AND FREE OF TOOL MARKS
- 4.) BREAK ALL SHARP CORNERS AND REMOVE BURRS
- 5.) CONCENTRICITY TO CENTER AXIS TO BE .002

REVISIONS			
SYM	DESCRIPTION	REVISED	DATE

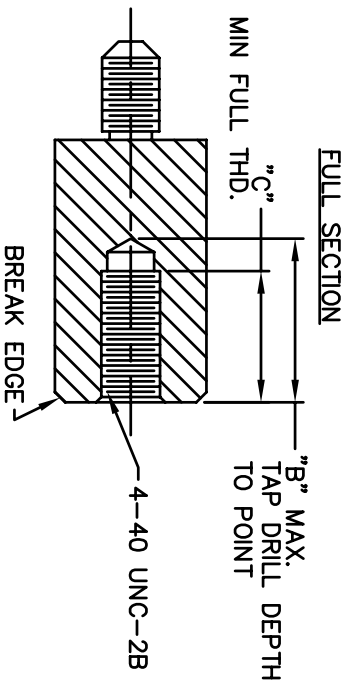

STANDOFF				
PART NO.	LENGTH "A"±.005	DRILL DEPTH "B" MAX	TAP DEPTH DIM	"C" MIN. NO. THDS
8216	.250	.218	.133	5-6
8217	.375	.312	.250	8-9
8218	.500	.330	.250	10-11
8219	.625	.330	.250	10-11
8220	.750	.330	.250	10-11
8221	.875	.330	.250	10-11
8222	1.000	.330	.250	10-11
8223	1.125	.330	.250	10-11
8224	1.250	.330	.250	10-11
8225	1.375	.330	.250	10-11
8226	1.500	.330	.250	10-11
8227	1.625	.330	.250	10-11
8228	1.750	.330	.250	10-11
8229	2.000	.330	.250	10-11
8230	2.500	.330	.250	10-11
8231	3.000	.330	.250	10-11

MATERIAL: BRASS-ALLOY 360- 1/2 HARD		FINISH: NICKEL	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: 8216-8231	
XX	XX	BRASS HEX	
±.010	±.005	MALE/FEMALE STANDOFF	
FRACTIONS	ANGLES	SCALE	
±1/64	±1°	4X	
HEAT TREAT:	---	DRAWN: T. LORD	DATE: 07/7/03
PLAT SCALE:	1=1	CHECKED: T. LORD	DATE: 07/7/03
APPROVED: T. LORD		DATE: 07/7/03	
		SIZE: B	DRAWING NUMBER: SD: 8216-8231
			ISSUE: Q

ABBATRON
Electronic Connectors and Hardware
632 Arch Street, Meadville, Pa. 16335