

公司简介 About Amphenol– TPI

Amphenol创立于1932年，为全球最大连接器制造商之一。


Amphenol主要为各行业提供连接解决方案并提供互连产品。包括：航空及军用连接器解决方案、汽车工业连接解决方案、铁路工业连接解决方案、无线通讯连接解决方案、互联网连接器解决方案、宽带通讯连接解决方案、通用工业连接解决方案等。Amphenol具有全面的产品线，成千上万种连接器产品应用于通信及信息处理领域；航空领域、军用领域、汽车领域、铁路领域及其它交通和通用工业领域等。Amphenol在全球实施本地化战略，共在全球设立了80多间工厂及100多个销售办事处，直接为各大洲的客户的产品和实施本地化服务。

ATPI 是安费诺集团位于加拿大温尼伯的全资子公司，ATPI广州是ATPI设在中国的分支机构。


Amphenol was founded in 1932, is one of the world's largest connector manufacturer.

Amphenol is mainly for various industries to provide connection solutions and provide interconnect products. Include: aviation and military connector solutions, the automotive industry solutions, railway industrial link solution, wireless communication solutions, Internet connector solution, broadband communications link solution, general industrial solutions such as Amphenol has a comprehensive product line, tens of thousands of kinds of connector products applied in the field of communications and information processing; Aviation, military areas, automobile industry, railway and other transportation and general industrial sectors and so on. Amphenol implement localization strategy in the whole world, set up more than 80 factories in the world and more than 100 sales offices, directly to the continents of customers with products and the implementation of the localization service.

ATPI – Amphenol Technical Products International Co. is a subsidiary of amphenol group based in Canada. ATPI-G – Amphenol Technical Products International (Guangzhou) Co. is a branch of ATPI based in China.

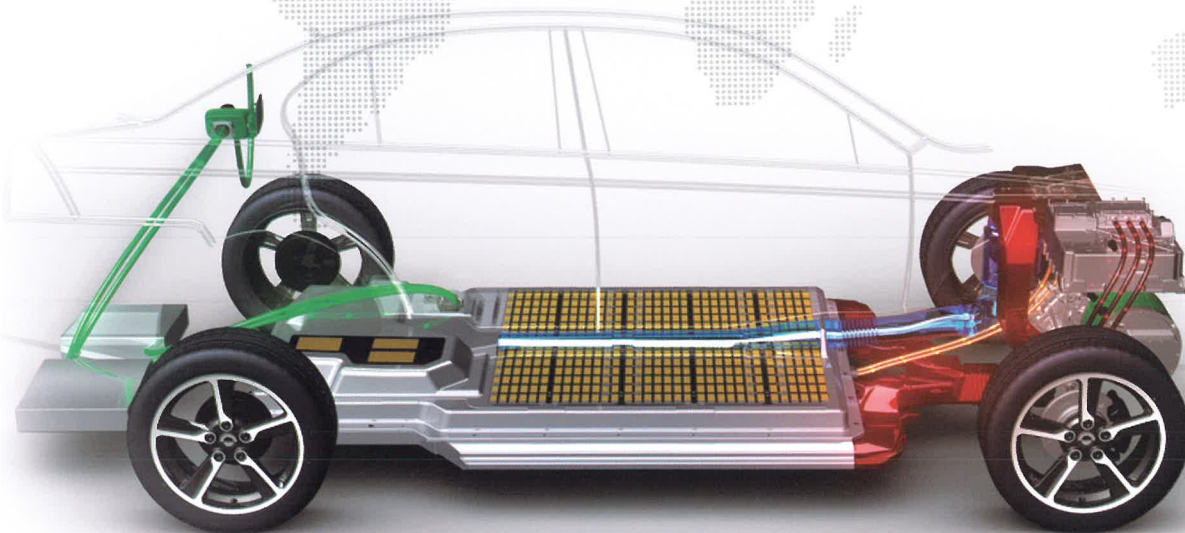

整车应用 Vehicle Application

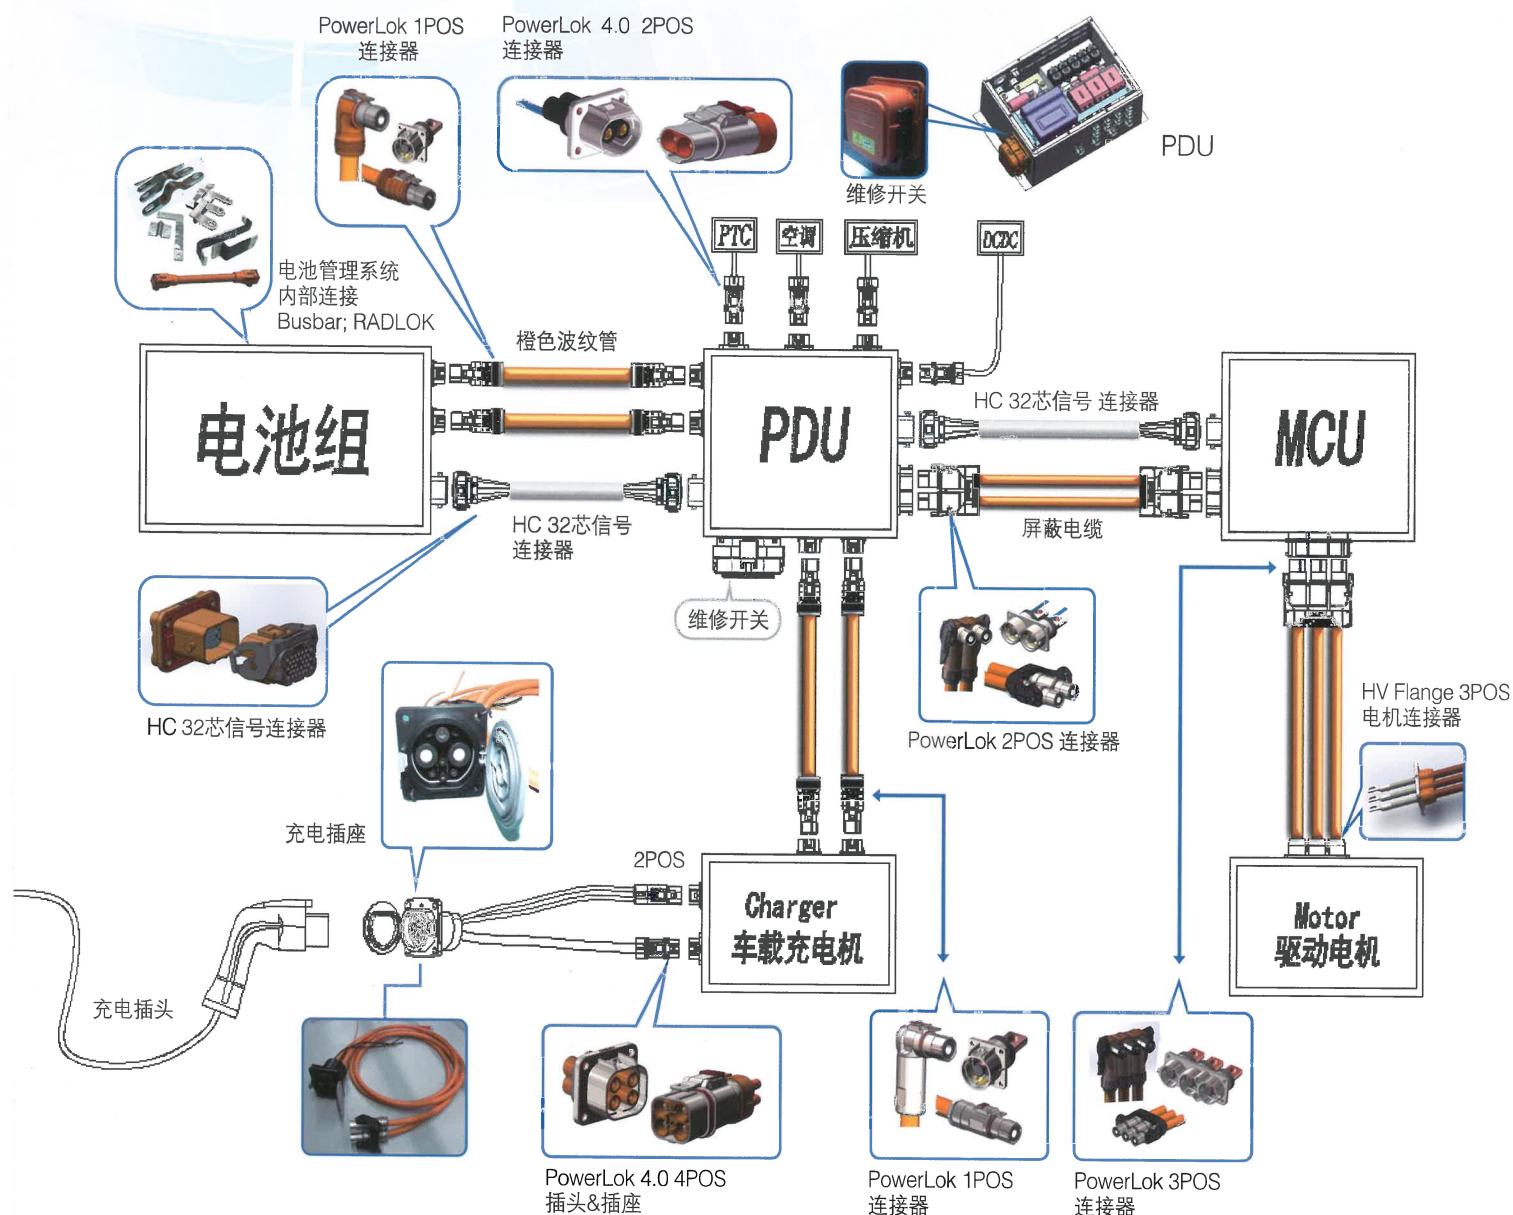

PowerLok™ 连接器
PowerLok™ Connector


安费诺PowerLok™产品运用了最新安费诺RADSOK®技术，是对于混合动力汽车和纯电动汽车行业里，需要可靠的、可定制的、易于安装的、节约成本的连接器现状的最佳解决方案。PowerLok™产品具备了防水屏蔽，二级锁扣，高压互锁，多种极性设计特点。

Utilizing Amphenol latest RADSOK® technology, Amphenol PowerLok™ product is the answer to HEV/EV where a custom, reliable, easy to install, and cost effective solution is required. PowerLok™ has many features: fully shielding, Automatic Secondary Lock, HVIL optional, Multi Polarization.

**PowerLok™ 4.0 连接器**
PowerLok™ 4.0 Connector

安费诺PowerLok™ 4.0 连接器是针对电动汽车中小电流应用推出的一款方案。在附带PowerLok™ 产品全部优势的同时，该产品的2芯或4芯紧密型设计能更好适应狭小空间的应用。

Amphenol PowerLok™ 4.0 Connector is designed for EV's medium and small current application. In the supplementary PowerLok™ product all advantages at the same time, the 2 & 4 position small size design can be adapt to the application in narrow space better.

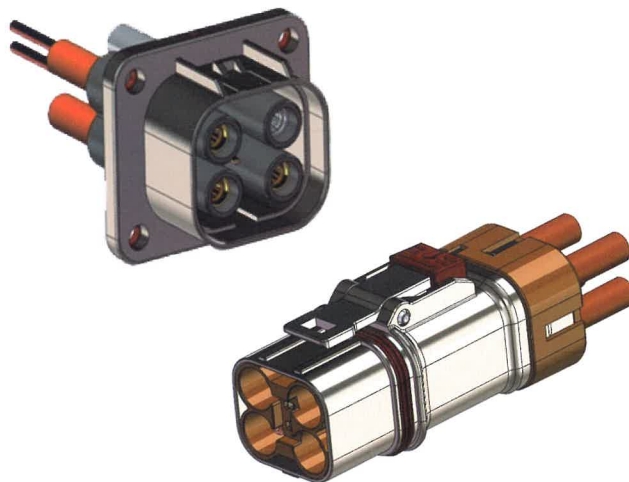**PowerLok™ 塑料连接器**
PowerLok™ Plastic Connector

安费诺PowerLok™ 塑料连接器是PowerLok™ 产品中低成本方案。该产品的特色在于360度可旋转设计和塑料低成本设计。

Amphenol PowerLok™ plastic connector is PowerLok™ products of low cost solutions. The characteristics of this product is 360 degree rotating design and plastic low cost design.



POWERLINK™ 电缆 POWERLINK™ Cable

安费诺POWERLINK™高压电缆可用于有高温/防油/阻燃要求的环境。该线缆具备高电压、柔韧、电磁屏蔽等特点，应用在电动汽车、混合动力汽车、燃料电池汽车、电池储能等领域。


Amphenol POWERLINK™ HV Cable are used in high temperature / oil / flame-resistance requirements condition. High voltage, flexible, electromagnetically shielded automotive cable for applications on EV, HEV, FCEV, Battery and Energy Storage wiring systems.



HV Flange™ HV Flange Connector

安费诺HV Flange™ 连接器是针对无插拔要求的应用而设计的低成本方案。该产品的特点在于移除了插头和插座，二级锁扣及高压互锁设计，降低了产品的成本。


Amphenol HV Flange™ connector is designed for some Non-pluggable requirement application. The characteristics of this product is we removed the plug and receptacle, automatic secondary lock and HVIL design, then reduced the cost.

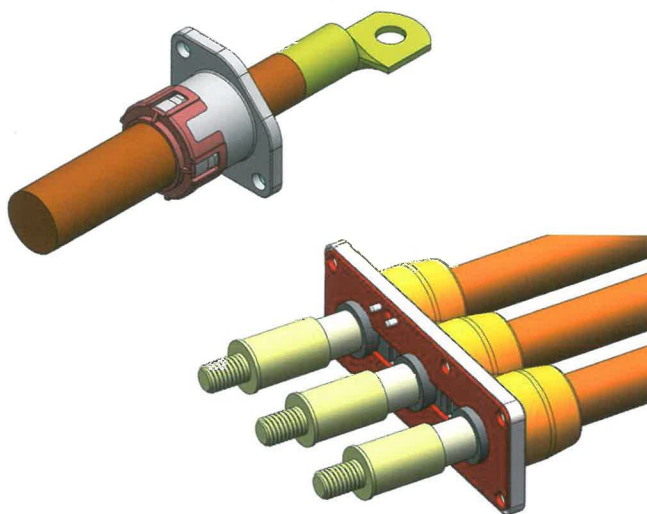

电源分配单元 Power Distribution Unit

高压电气控制单元。它包括盒体和盒盖，盒体内设有电机电源控制系统、空调电源控制系统、充电机电源控制系统、电池包控制系统和直流转化装置电源控制系统。

High voltage electrical control unit. It comprises a box body and a box cover, the box body is provided with a motor power supply control system, air conditioning control system for power supply, battery pack charger power control system, control system and DC power conversion device control system.

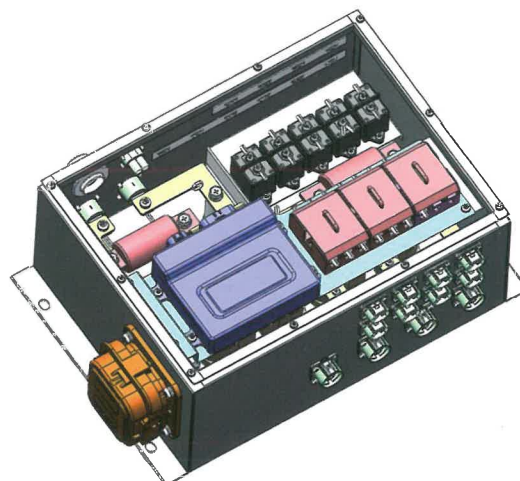

产品特点 Product Features

- 高压互锁 / HVIL
- IP67及屏蔽 / IP67 & Shielding
- 二次锁口 / Automatic Secondary Lock
- 1-3芯可选 / 1-3 Positions Available
- 90度及180度插头 / 90 D and 180 D plug
- 5种键位 / 5 Keys

应用领域 Applications

- 新能源电动汽车
New Energy Electric Vehicles
- 变频器 / Frequency Converter
- 逆变器 / Inverter
- 电池连接 / Battery Connection

技术参数 Technical Data

DC Current Rating	90-500A
DC Voltage Rating	1000V
Temperature Range	-40° C to +125° C
Flammability	UL94 V-0
Mating Cycle	Min. 50
Mutil Polarization	5 Keys

PowerLok Recommended
Cable Size & Current Rating

Current Rating of Connector(A)	Accepted Cbl Size(mm) ²	Current Rating of Cable(A)
120 Series	16	90
	25	120
200 Series	35	150
	50	200
300 Series	35	150
	50	200
	70	250
400 Series	95	300
	120	350
	135	400
500 Series	120	350
	135	400
	150	500

PowerLok 连接器插头 / PowerLok Connector Plug




单芯180° 组装式插头
1POS 180D Plug Connector



2芯180° 组装式插头
2POS 180D Plug Connector



3芯180° 组装式插头
3POS 180D Plug Connector



单芯180° 注塑式插头
1POS 180D Overmolded Plug



2芯180° 注塑式插头
2POS 180D Overmolded Plug



单芯90° 组装式插头
1POS 90D Plug Connector




2芯90° 组装式插头
2POS 90D Plug Connector



3芯90° 组装式插头
3POS 90D Plug Connector



单芯90° 注塑式插头
1POS 90D Overmolded Plug



2芯90° 注塑式插头
2POS 90D Overmolded Plug

PowerLok 插头选型信息

PowerLok Plug Ordering Information

选型例子

Order Example

PL 10 X - 301 - 70

Product Type	(A) Plug Type	(B) Polarization	(C) Series	(D) Cable Size(mm ²)
PL PowerLok™	10 Overmolded Cble Assembly, Straight	X 1POS, Key "X" Orange	120 120 Series	Refer to "PowerLok™ Recommended Cable Size & Current Rating"
	20 Overmolded Cble Assembly, Right Angle	Y 1POS, Key "Y" Black	121 120 Series with HVIL	
	18 Plug Connector, Straight	U 1POS, Key "U" Yellow	200 200 Series	
	28 Plug Connector, Right Angle	V 1POS, Key "V" Green	201 201 Series with HVIL	
		W 1POS, Key "W" Red	300 300 Series	
		2X 2POS, Key "X"	301 300 Series with HVIL	
		2Y 2POS, Key "Y"	400 400 Series	
		3X 3POS, Key "X"	401 401 Series with HVIL	
		3Y 3POS, Key "Y"	500 500 Series	
			501 500 Series with HVIL	

PowerLok 连接器插座
PowerLok Connector Receptacle




单芯插座
1POS Receptacle



2芯插座
2POS Receptacle



3芯插座
3POS Receptacle

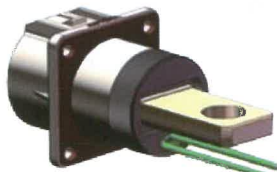

终端形式: 铜排
Termination Type: Lug



终端形式: 螺栓
Termination Type: Thread Bolt



终端形式: 铜管
Termination Type: Crimping Lug



终端形式: 90D铜排
Termination Type: 90D Lug

PowerLok连接器插座选型信息
PowerLok Receptacle Ordering Information

选型例子
Order Example

PL 30 X - 301 - 10 M10

Product Type	(A) Connector Type	(B) Polarization &(Touch Proof Cover) color	(C) Series	(D) Termination Type	(E) Termination Size
PL PowerLok™	00 1 POS Receptacle	X Key "X", Orange	120 120 Series	10 Lug	M+Stud Size Screw Hole
	08 2 POS & 3 POS Receptacle	Y Key "Y", Black	121 120 Series with HVIL	20 Thread Pin	D+Stud Size Through Hole
		U Key "U", Yellow	200 200 Series	30 Crimping Lug	M+Thread Size Thread Size
		V Key "V", Green	201 201 Series with HVIL	90 90D Lug	
		W Key "W", Red	300 300 Series		
		2X 2POS,Key "X"	301 300 Series with HVIL		
		2Y 2POS,Key "Y"	400 400 Series		
		3X 3POS,Key "X"	401 401 Series with HVIL		
		3Y 3POS,Key "Y"	500 500 Series		
			501 500 Series with HVIL		

产品特点 Product Features

- 高压互锁 / HVIL
- IP67及屏蔽 / IP67 & Shielding
- 二次锁口 / Automatic Secondary Lock
- 2 & 4芯可选 / 2 & 4 Positions Available
- 90度及180度插头 / 90 D and 180 D plug

应用领域 Applications

- 电池连接 / Battery Connection
- 新能源电动汽车 / New Energy Electric Vehicles
- 变频器 / Frequency Converter
- 大型开关柜 / Large Switchgear

技术参数 Technical Data

DC Current Rating	20 A~60 A
DC Voltage Rating	1000V
Temperature Range	-40° C to +125° C
Flammability	UL94 V-0
Mating Cycle	Min. 50
Mutil Polarization	3 Keys

PowerLok 4.0 二芯连接器 PowerLok 4.0 2POS Connector



2芯插座
2POS Receptacle



2芯插头
2POS Plug

PowerLok P4连接器选型信息

PowerLok P4 Connector Ordering Information


选型例子
Order Example

(A) Product Type		(B) Connector Type		(C) Polarization & color		(D) Series		(E) Accepted Cable Size		
								Cable Size	Current Rating	
PL	PowerLok™	082	2POS Receptacle	X	Key "X", Orange	60	60 Series	2.5	2.5mm ²	25A
		182	2POS Plug, Straight	Y	Key "Y", Black	61	60 Series with HVIL	4	4mm ²	40A
				U	Key "U", Yellow			6	6mm ²	45A
								10	10mm ²	60A

PowerLok 4.0 四芯连接器
PowerLok 4.0 POS Connector



4芯插座
4POS Receptacle

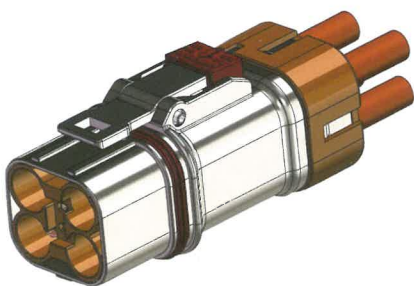

4芯插头
4POS Plug

PowerLok P4 连接器选型信息
PowerLok P4 Connector Ordering Information

选型例子
Order Example

(A) Product Type		(B) Connector Type	(C) Polarization & color	(D) Series		(E) Accepted Cable Size		
						Cable Size	Current Rating	
PL	PowerLok™	024 4POS Receptacle	X Key "X" , Orange	40	40 Series	2.5	2.5mm ²	25A
		184 4POS Plug , Straight	Y Key "Y" , Black	41	40 Series with HVIL	4	4mm ²	40A
			U Key "U" , Yellow			6	6mm ²	45A

产品特点 Product Features

- 360° 旋转 / 360 degree rotatable
- 塑料低成本 / Plastic Low Cost
- IP67 保护 / IP67 Protection
- 二次锁扣 / Automatic Secondary Lock
- 90度及180度插头 / 90 D and 180 D plug


应用领域 Applications

- 电池连接 / Battery Connection
- 新能源电动汽车 / New Energy Electric Vehicles
- 变频器 / Frequency Converter
- 大型开关柜 / Large Switchgear

PowerLok 塑料连接器插头 PowerLok Plastic Connector Plug



塑料直角插头
Plastic Plug, Right Angle

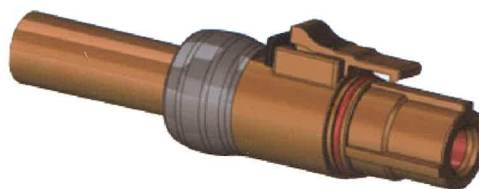


塑料直头插头
Plastic Plug, Straight

PowerLok 塑料连接器选型信息 PowerLok Plastic Connector Ordering Information


选型例子
Order Example

				PL	50	X	-	120	-	25	Order Example
Product Type		(A) Plug Type		(B) Polarization		(C) Series		(D) Cable Size(mm²)			
PL	PowerLok™	40	Overmolded Cble Assembly, Straight	X	1 POS ,Key "X" Orange	120	120 Series	Refer to "PowerLok™ Recommended Cable Size & Current Rating" Chart			
		50	Overmolded Cble Assembly, Right Angle	Y	1 POS ,Key "Y" Black	200	200 Series				
				U	1 POS ,Key "U" Yellw	300	300 Series				
				V	1 POS ,Key "V" , Green						
				W	1 POS ,Key "W" , Red						


PowerLok 塑料连接器插座 PowerLok Plastic Connector Receptacle



终端形式：铜排
Termination Type: Busbar




终端形式：螺栓
Termination Type: Thread Bolt



终端形式：铜管
Termination Type: Tubular Lug



终端形式：RADLOK端子
Termination Type: RADLOK Pin

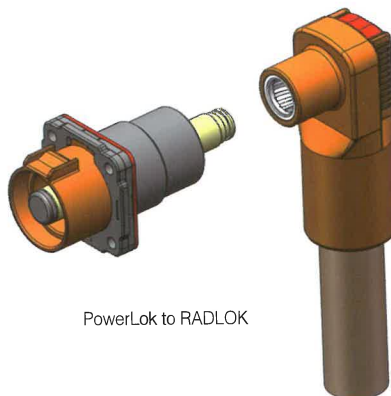

PowerLok to RADLOK

PowerLok 塑料连接器选型信息

PowerLok Plastic Connector Ordering Information

选型例子
Order Example

Product Type		(A) Connector Type		(B) Polarization & (Touch Proof Cover) color		(C) Series		(D) Termination Type		(E) Termination Size	
PL	PowerLok™	30	1 POS Receptacle	X	Key "X", Orange	120	120 Series	10	Busbar	M+Stud Size	Screw Hole
				Y	Key "Y", Black	200	200 Series	20	Thread Pin	D+Stud Size	Through Hole
				U	Key "U", Yellow	300	300 Series	30	Lug	M+Thread Size	Thread Size
				V	Key "V", Green			40	Pin	R+Pin Size	Pin Size
				W	Key "W", Red						

产品名 Production Name

POWERLINK™ 高压屏蔽电缆/POWERLINK™ HV Shielding Cable

材料
Material

- 导体-裸铜 / Conductor – Bare Copper
- 绝缘-橘色XLPE / Insulation – XLPE Orange
- 屏蔽-铝箔麦拉 / Shielding – AL-MYLAR
- 外被-橘色XLPE / Jacket – XLPE Orange

RoHS和REACH法规符合/RoHS and REACH Compliant

标准Standard: ISO 6722 Class C 125


产品特点
Product Features

- 高压高电流可靠 / Reliable to high-voltage & current conditions
- 柔软易安装 / Flexible and easy to handle for harnessing
- 外径2.5 mm² 至150 mm² / Range from 2.5 mm² to 150 mm²
- 电磁屏蔽 / Excellent EMI, EMC noise reduction

应用领域
Applications

- 电动汽车, 混合动力汽车, 燃料电池汽车
EV, HEV, FCEV

Amphenol Industrial POWERLINK HV Shielding Cable 1500V

POWERLINK™ 高压屏蔽电缆
POWERLINK™ HV Shielding Cable

结构尺寸/Construction & Dimensions

料号 P/N	导体截面积 Size	导体结构 Conductor Structure (mm)	平均绝缘厚度 Insulation Av. Thickness (mm)	最小绝缘厚度 Insulation Min. Thickness (mm)	芯线外径 Dia Primary Insulation (mm)	护套厚度 Sheath Thickness (mm)	线缆外径 Nom Dia Outside (mm)	弯曲半径 Bending Radius
AC-CP710020	2.5mm ²	124/0.16	0.6	0.44	3.30± 0.2	0.6	5.2± 0.2	≥ 4 X OD
AC-CP710040	4mm ²	199/0.16	0.6	0.44	4.10± 0.2	0.6	5.8± 0.2	≥ 4 X OD
AC-CP710060	6mm ²	298/0.16	0.6	0.44	4.80± 0.2	0.6	6.7± 0.3	≥ 4 X OD
AC-CP710100	10mm ²	497/0.16	0.8	0.62	6.25± 0.2	0.8	8.6± 0.3	≥ 4 X OD
AC-CP710160	16mm ²	796/0.16	1.0	0.80	8.10± 0.2	1.3	11.2± 0.3	≥ 4 X OD
AC-CP710250	25mm ²	1244/0.16	1.3	1.04	10.20± 0.2	1.3	13.5± 0.3	≥ 5 X OD
AC-CP710350	35mm ²	1743/0.16	1.3	1.04	11.50± 0.3	1.3	14.5± 0.5	≥ 5 X OD
AC-CP710500	50mm ²	2492/0.16	1.5	1.20	13.60± 0.3	1.4	17.0± 0.5	≥ 5 X OD
AC-CP710700	70mm ²	3486/0.16	1.5	1.20	15.50± 0.3	1.5	19.5± 0.5	≥ 5 X OD
AC-CP710950	95mm ²	4732/0.16	1.8	1.52	18.20± 0.5	1.5	22.6± 0.5	≥ 5 X OD
AC-CP711200	120mm ²	5985/0.16	1.9	1.61	20.20± 0.5	1.5	24.6± 0.5	≥ 6 X OD
AC-CP711500	150mm ²	7467/0.16	2.1	1.79	22.50± 0.5	1.6	27.1± 0.5	≥ 6 X OD

特征 / Characteristics

Item	Characteristics
Rating Voltage	1500V DC
Conductor Resistance(Max.)Ω /km@20°C	7.600Ω /km (2.5 mm ²)
	4.710Ω /km (4 mm ²)
	2.890Ω /km (6 mm ²)
	1.820Ω /km (10 mm ²)
	1.160Ω /km (16 mm ²)
	0.743Ω /km (25 mm ²)
Temperature Rating	-40°C to +125°C
Flame Test	VW-1
Withstand Voltage	6000V / 5min
Oil Resistant Acid and Alkali Resistant	

产品名 Production Name

POWERLINK™ 高压电缆/POWERLINK™ HV Cable

材料
Material

- 导体 – 裸铜/Conductor – Bare Copper
- 绝缘 – 橘色XLPE/Insulation – XLPE Orange

RoHS和REACH法规符合/ RoHS and REACH Compliant

标准Standard: ISO 6722 Class C 125


产品特点
Product Features

- 高压高电流可靠/Reliable to high-voltage & current conditions
- 柔软易安装/Flexible and easy to handle for harnessing
- 外径2.5 mm² 至150 mm² /Range from 2.5 mm² to 150 mm²

应用领域
Applications

- 电池, 储能系统
Battery, Energy Storage

Amphenol Industrial POWERLINK HV Cable 1500V

POWERLINK™ 高压电缆
POWERLINK™ HV Cable

结构尺寸/Construction & Dimensions

料号 P/N	导体截面积 Size	导体结构 Conductor Structure (mm)	平均绝缘厚度 Insulation Av. Thickness (mm)	最小绝缘厚度 Insulation Min. Thickness (mm)	芯线外径 Dia Primary Insulation (mm)	弯曲半径 Bending Radius
AC-CP700020	2.5mm ²	124/0.16	0.6	0.44	3.30± 0.2	≥ 3 X OD
AC-CP700040	4mm ²	199/0.16	0.6	0.44	4.10± 0.2	≥ 3 X OD
AC-CP700060	6mm ²	298/0.16	0.6	0.44	4.80± 0.2	≥ 3 X OD
AC-CP700100	10mm ²	497/0.16	0.8	0.62	6.25± 0.2	≥ 3 X OD
AC-CP700160	16mm ²	796/0.16	1.0	0.80	8.10± 0.2	≥ 3 X OD
AC-CP700250	25mm ²	1244/0.16	1.3	1.04	10.20± 0.2	≥ 4 X OD
AC-CP700350	35mm ²	1743/0.16	1.3	1.04	11.50± 0.3	≥ 4 X OD
AC-CP700500	50mm ²	2492/0.16	1.5	1.20	13.60± 0.3	≥ 4 X OD
AC-CP700700	70mm ²	3486/0.16	1.5	1.20	15.50± 0.3	≥ 4 X OD
AC-CP700950	95mm ²	4732/0.16	1.8	1.52	18.20± 0.5	≥ 4 X OD
AC-CP701200	120mm ²	5985/0.16	1.9	1.61	20.20± 0.5	≥ 5 X OD
AC-CP701500	150mm ²	7467/0.16	2.1	1.79	22.50± 0.5	≥ 5 X OD

特征 / Characteristics

Item	Characteristics
Rating Voltage	1500V DC
Conductor Resistance(Max.)Ω /km@20° C	7.600Ω /km (2.5 mm ²)
	4.710Ω /km (4 mm ²)
	2.890Ω /km (6 mm ²)
	1.820Ω /km (10 mm ²)
	1.160Ω /km (16 mm ²)
	0.743Ω /km (25 mm ²)
Temperature Rating	-40°C to +125°C
Flame Test	VW-1
Withstand Voltage	6000V / 5min
Oil Resistant Acid and Alkali Resistant	

产品应用案例

电池系统连接



动力电池



超级电容

整车高压连接



整车高压01




整车高压02



整车高压03

高压控制模块连接

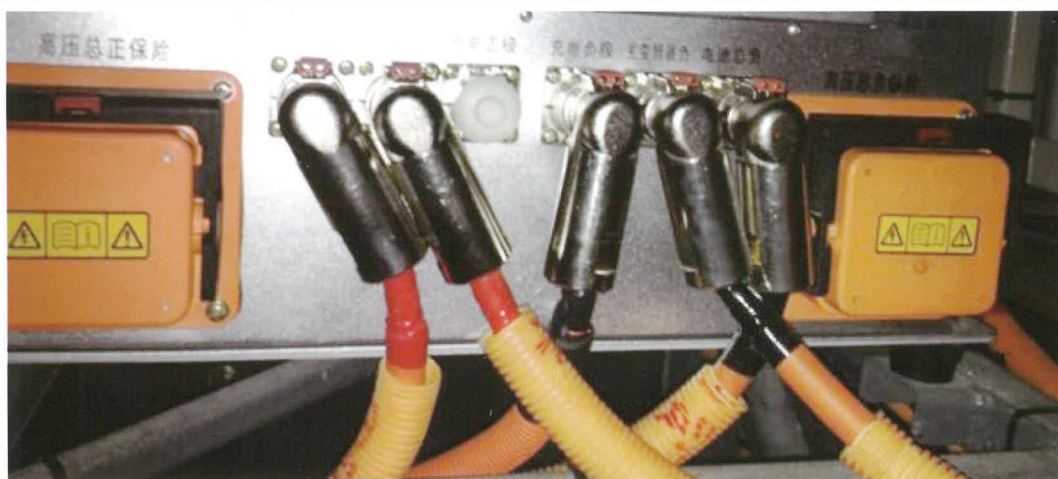

PDU 01

Amphenol



技术支持和客户服务

网站: www.amphenol-tpi.com
企业邮箱: CSR-ATPIG@amphenol-gasf.com
联系电话: 86-20-34839801 传真: 86-20-348339800

华南地区
联系人: 陈祥文
联系电话: 86-188-9839-6008
工作邮箱: micky.chen@amphenol-gasf.com

华东、华北地区
联系人: 曹辉
联系电话: 15011785871
工作邮箱: kevin.cao@amphenol-gasf.com

FOR MORE INFORMATION

Technical Support and Customer Service

Internet: www.tpil.com
North America:
E-mail: CSR@tpil.com
Phone: 1-204-697-2222 Fax: 1-204-694-6164

EMEA:
Contact: Arthur Heijmerikx
E-mail: aheijmerikx@amphenol-aio.com
Telephone: +39 348 3145390