

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

| | |
|---|-----------------|
| Storage Temperature | –65°C to +150°C |
| Ambient Temperature with Power Applied | –40°C to +85°C |
| Supply Voltage to Ground Potential (Inputs & V _{CC} Only)..... | –0.5V to +7.0V |
| Supply Voltage to Ground Potential (Outputs & D/O Only) ... | –0.5V to +7.0V |
| DC Input Voltage | –0.5V to +7.0V |
| DC Output Current..... | 120mA |
| Power Dissipation | 0.5W |

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, T_A = –40°C to +85°C, V_{CC} = 5V ±10%)

| Parameters | Description | Test Conditions ⁽¹⁾ | Min. | Typ. ⁽²⁾ | Max. | Units |
|------------------|--------------------------------------|---|------|---------------------|------|-------|
| V _{IH} | Input HIGH Voltage | Guaranteed Logic HIGH Level | 2.0 | | | V |
| V _{IL} | Input LOW Voltage | Guaranteed Logic LOW Level | –0.5 | | 0.8 | |
| I _{IH} | Input HIGH Current | V _{CC} = Max., V _{IN} = V _{CC} | | | ±1 | μA |
| I _{IL} | Input LOW Current | V _{CC} = Max., V _{IN} = GND | | | ±1 | |
| I _{OZH} | High Impedance Output Current | 0 ≤ A, B ≤ V _{CC} | | | ±1 | |
| V _{IK} | Clamp Diode Voltage | V _{CC} = Min., I _{IN} = –18mA | | –0.7 | –1.2 | V |
| I _{ON} | Short Circuit Current ⁽³⁾ | A (B) = 0V, B (A) = V _{CC} | 100 | | | mA |
| V _H | Input Hysteresis at Control Pins | | | 150 | | mV |
| R _{ON} | Switch On-Resistance ⁽⁴⁾ | V _{CC} = Min., V _{IN} = 0.0V | | 5 | 7 | Ω |
| | | V _{CC} = Min., V _{IN} = 2.4V | | 10 | 15 | |

Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at V_{CC} = 5.0V, T_A = 25°C ambient and maximum loading.
- Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- Measured by the voltage drop between A and B pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (A,B) pins.

Capacitance (T_A = 25°C, f = 1 MHz)

| Parameters ⁽¹⁾ | Description | Test Conditions | Typ. | Units |
|---------------------------|-----------------------------|----------------------|------|-------|
| C _{IN} | Input Capacitance | V _{IN} = 0V | 6 | pF |
| C _{OFF} | A/B Capacitance, Switch Off | | 6 | |
| C _{ON} | A/B Capacitance, Switch On | | 8 | |

Notes:

- This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

| Parameters | Description | Test Conditions ⁽¹⁾ | | Min. | Typ. ⁽²⁾ | Max. | Units |
|------------------|---|---|--|------|---------------------|------|--------|
| I _{CC} | Quiescent Power Supply Current | V _{CC} = Max. | V _{IN} = GND or V _{CC} | | 0.1 | 10 | μA |
| ΔI _{CC} | Supply Current per Input @ TTL HIGH | V _{CC} = Max. | V _{IN} = 3.4V ⁽³⁾ | | | 2.5 | mA |
| I _{CCD} | Supply Current per Input per MHz ⁽⁴⁾ | V _{CC} = Max., A and B Pins Open B _{EX} = GND, Control Input Toggling 50% Duty Cycle | | | | 0.25 | mA/MHz |

Notes:

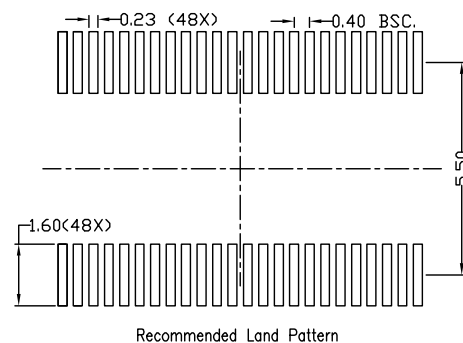
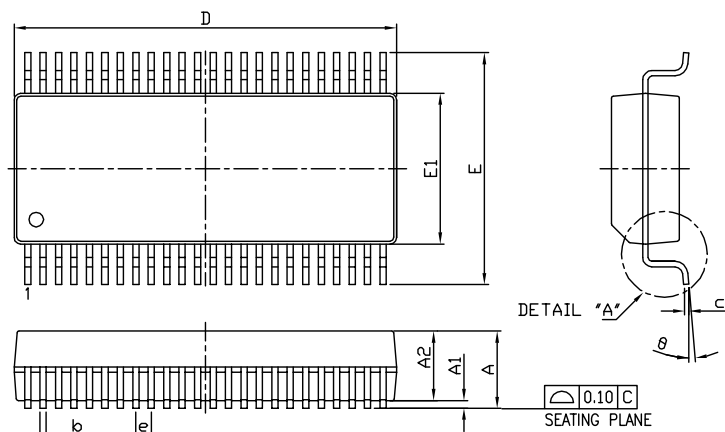
- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- Typical values are at V_{CC} = 5.0V, +25°C ambient.
- Per TTL driven input (V_{IN} = 3.4V, control inputs only); A and B pins do not contribute to I_{CC}.
- This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

PI5C16861 Switching Characteristics over Operating Range

| Parameters | Description | Conditions | PI5C16861 | | Unit |
|--------------------------------------|--|--|-----------|------|------|
| | | | Com. | | |
| | | | Min. | Max. | |
| t _{PLH} t _{PHL} | Propagation Delay ^(1,2) Ax to Bx, Bx to Ax | C _L = 50pF R _L = 500Ω | | 1.25 | ns |
| t _{PZH} t _{PZL} | Bus Enable Time B _{EX} to Ax or Bx | | 1.5 | 6.5 | |
| t _{PHZ} t _{PLZ} | Bus Disable Time B _{EX} to Ax or Bx | | 1.5 | 5.5 | |

Notes:

- This parameter is guaranteed but not tested on Propagation Delays.
- The bus switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Packaging Mechanical: 48-pin BSQOP (B)


| SYMBOL | DIMENSION IN MM | | |
|--------|-----------------|------|-------|
| | MIN. | NOM. | MAX. |
| A | | | 2.00 |
| A1 | 0.05 | | 0.25 |
| A2 | 1.45 | 1.60 | 1.75 |
| c | 0.09 | | 0.20 |
| E | 5.80 | 6.00 | 6.20 |
| E1 | 3.80 | 3.90 | 4.00 |
| L | 0.50 | 0.60 | 0.75 |
| L1 | 0.25 BASIC | | |
| θ | 0 | | 8 |
| b | 0.13 | | 0.23 |
| e | 0.40 BASIC | | |
| D | 9.80 | 9.90 | 10.00 |
| R1 | 0.09 | | |

Notes:

1. Controlling Dimension in Millimeters. Angle in Degrees.
2. Refer JEDEC MO-154/AB
3. Package Outline Exclusive of Mold Flash and Metal Burr


DATE: 10/15/08
DESCRIPTION: 48-Pin, 154-Mil Wide BQSOP
PACKAGE CODE: B48
DOCUMENT CONTROL #: PD-1210
REVISION: F

08-0522

Ordering Information

| Ordering Code | Package Type | Package Description |
|---------------|--------------|--------------------------------|
| PI5C16861AE | A | Pb-free & Green, 48-Pin, TSSOP |

Notes:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free & Green
- Adding an X suffix = Tape/Reel