

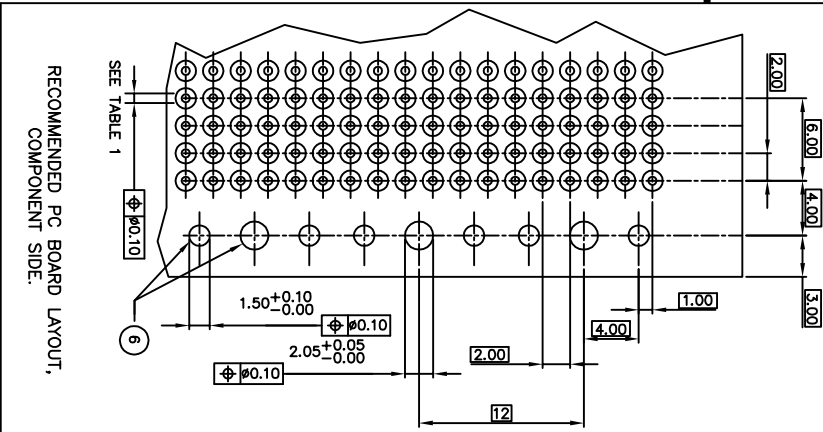


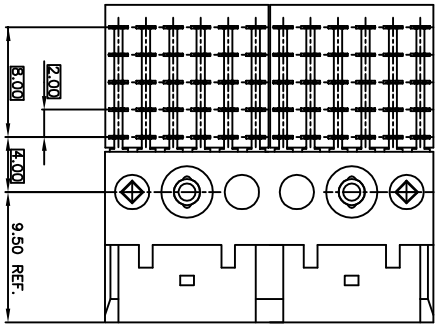

PRODUCT NUMBER	REG TYPE	TAIL TYPE	TAIL LGTH. DIM "A"	POB THICKNESS	LOADING CONFIGURATION
89093-X02	PRESS	PRESS-FIT	2.90	1.6	FULLY LOADED
89093-X12	PRESS	PRESS-FIT	3.53	2.4	FULLY LOADED
89093-X02LF	PRESS	PRESS-FIT	2.90	1.6	FULLY LOADED
89093-X12LF	PRESS	PRESS-FIT	3.53	2.4	FULLY LOADED

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYL	TELCORDIA CO
-2YY/2YYL	CUSTOMER SPECIAL
-3YY/3YYL	CUSTOMER SPECIAL

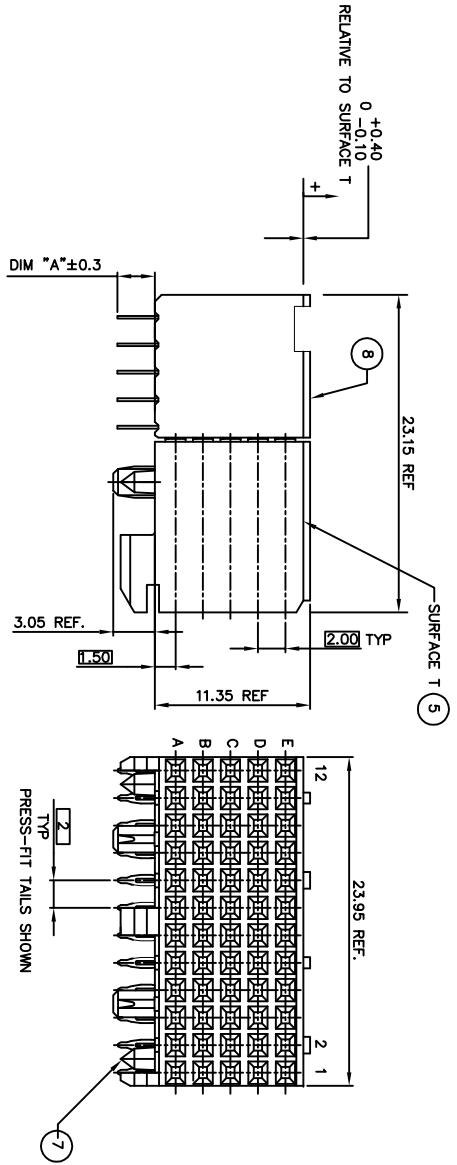

PLATED THRU HOLE REQUIREMENTS	HOLE DIAMETER AFTER PLATING	DRILLED HOLE DIAMETER	COPPER PLATING	SNPB PLATING
	0.65-0.80	0.81-0.86 (0.85 DRILL)	0.025 - 0.05	0.005-0.015

mod'l. code		NOTE 1		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ect no	dr	date	linear	projection	title	product family	code	www.fciconnect.com
N	D006	0510	12/06/06			B SERIES R/A SIGNAL RECEPT ASSY,	5 ROW, 2 MOD, PF		
P	D007	0188	05/10/07						
R	D008	0171	8/26/08	angles					
S	D009	0068	06/06/09	dr					
L	V05	0074	4/12/05	chr	MM				
M	D05	0320	6/08/05	TAB	1:1				
sheet	revision	sheet	sheet	sheet	sheet	sheet	sheet	sheet	sheet
1	1	1	1	1	1	1	1	1	1

- NOTES:
- CONNECTOR MATERIALS:
HOUSING: LCP, 30% GLASS FILLED, UL 94-V0 COMPLIANT
TERMINAL: PHOSPHOR BRONZE ALLOY
 - TAIL PLATING:
PRESS-FIT TYPE: 0.5-1.5 um TIN LEAD
GS-12-002
 - PRODUCT SPECIFICATION:
GS-12-002
 - APPLICATION SPECIFICATIONS:
BUS-20-061
GS-20-001
TA-941
 - PRODUCT MARKING: (PART NUMBER & LOT CODE).
 - INDICATED HOLES ARE UNPLATED.
 - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - THESE PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 240C FOR 60 SECONDS IN A CONNECTION, INFAR-RED OR VAPOR PHASE REFLOW OVEN.
 - FOR LEAD FREE PART NUMBERS ADD "LF" SUFFIX. EXAMPLE: 89093-XYYLF.