

## Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

|                                              |                 |
|----------------------------------------------|-----------------|
| Storage Temperature .....                    | –65°C to +150°C |
| Ambient Temperature with Power Applied ..... | –40°C to +85°C  |
| Supply Voltage to Ground Potential.....      | –0.5V to +5.5V  |
| DC Input Voltage .....                       | –0.5V to +5.5V  |
| DC Output Current.....                       | 120mA           |
| Power Dissipation .....                      | 0.5W            |

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## DC Electrical Characteristics (Over the Operating Range)

| Symbol          | Description                          | Test Conditions <sup>(1)</sup>                                                                                        |                        | Min. | Typ. | Max. | Units |
|-----------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------|------------------------|------|------|------|-------|
| V <sub>OH</sub> | Output HIGH voltage                  | V <sub>CC</sub> =3V, V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>                                              | I <sub>OH</sub> = –8mA | 2.4  | 3    | –    | V     |
| V <sub>OL</sub> | Output LOW voltage                   | V <sub>CC</sub> =3V, V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>                                              | I <sub>OL</sub> = 12mA | –    | 0.4  | 0.5  |       |
| V <sub>IH</sub> | Input HIGH voltage                   | Guaranteed Logic HIGH Level (Input Pins)                                                                              |                        | 2    | –    | 5.5  |       |
| V <sub>IL</sub> | Input LOW voltage                    | Guaranteed Logic LOW Level (Input Pins)                                                                               |                        | –0.5 | –    | 0.8  |       |
| I <sub>IH</sub> | Input HIGH current                   | V <sub>CC</sub> = 3.6V                                                                                                | V <sub>IN</sub> = 3.6V | –    | –    | 1    | μA    |
| I <sub>IL</sub> | Input LOW current                    | V <sub>CC</sub> = 3.6V                                                                                                | V <sub>IN</sub> = 0V   | –    | –    | –1   |       |
| V <sub>IK</sub> | Clamp diode voltage                  | V <sub>CC</sub> = Min., I <sub>IN</sub> = –18mA                                                                       |                        | –    | –0.7 | –1.2 | V     |
| I <sub>OH</sub> | Output HIGH current                  | V <sub>CC</sub> = 3.3V, V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> , V <sub>OUT</sub> = 1.5V <sup>(5)</sup> |                        | –25  | –45  | –80  | mA    |
| I <sub>OL</sub> | Output LOW current                   | V <sub>CC</sub> = 3.3V, V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> , V <sub>OUT</sub> = 1.5V <sup>(5)</sup> |                        | 25   | 45   | 90   |       |
| I <sub>OS</sub> | Short circuit current <sup>(5)</sup> | V <sub>CC</sub> = Max., V <sub>OUT</sub> = GND <sup>(5)</sup>                                                         |                        | –50  | –100 | –180 |       |
| V <sub>H</sub>  | Input Hysteresis                     |                                                                                                                       |                        | –    | 150  | –    | mV    |
| R <sub>S</sub>  | Series Resistor                      |                                                                                                                       |                        |      | 22   |      | Ω     |

### Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at V<sub>CC</sub> = 3.3V, +25°C ambient and maximum loading.
- V<sub>OH</sub> = V<sub>CC</sub> – 0.6V at rated current.
- This parameter is determined by device characterization but is not production tested.
- Not more than one output should be shorted at one time. Duration of the test should not exceed one second.

## Power Supply Characteristics

| Parameters       | Description                                     | Test Conditions <sup>(1)</sup>                                          |                                                         | Min. | Typ <sup>(2)</sup> | Max. | Units |
|------------------|-------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------|------|--------------------|------|-------|
| I <sub>CC</sub>  | Quiescent Power Supply Current                  | V <sub>CC</sub> = Max.                                                  | V <sub>IN</sub> = GND or V <sub>CC</sub>                | —    | 0.1                | 30   | μA    |
| ΔI <sub>CC</sub> | Supply Current per Inputs @ TTL HIGH            | V <sub>CC</sub> = Max.                                                  | V <sub>IN</sub> = V <sub>CC</sub> – 0.6V <sup>(3)</sup> | —    | 47                 | 300  |       |
| I <sub>CCD</sub> | Supply Current per Input per MHz <sup>(4)</sup> | V <sub>CC</sub> = Max., Outputs Open Per Output Toggling 50% Duty Cycle | V <sub>IN</sub> = V <sub>CC</sub>                       | —    |                    |      | mA/   |
|                  |                                                 |                                                                         | V <sub>IN</sub> = GND                                   |      | 0.08               | 0.16 | MHz   |

### Notes:

- For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- Typical values are at V<sub>CC</sub> = 3.3V, +25°C ambient.
- Per TTL driven input (V<sub>IN</sub> = V<sub>CC</sub> – 0.6V); all other inputs at V<sub>CC</sub> or GND.
- This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
- Values for these conditions are examples of the I<sub>C</sub> formula. These limits are guaranteed but not tested.

## Capacitance (T<sub>A</sub> = 25°C, f = 1 MHz)

| Parameters <sup>(1)</sup> | Description        | Test Conditions       | Typ | Max. | Units |
|---------------------------|--------------------|-----------------------|-----|------|-------|
| C <sub>IN</sub>           | Input Capacitance  | V <sub>IN</sub> = 0V  | 3.0 | 4    | pF    |
| C <sub>OUT</sub>          | Output Capacitance | V <sub>OUT</sub> = 0V |     | 6    |       |

### Notes:

- This parameter is determined by device characterization but is not production tested.


## Maximum Switching Characteristics (Over operating range)

| Symbol                               | Description                                   | Condition   | Max. | Units |
|--------------------------------------|-----------------------------------------------|-------------|------|-------|
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay A to Bn <sup>(3)</sup>      | CL = 15pF   | 2.5  | ns    |
| t <sub>R</sub> /t <sub>F</sub>       | Rise/Fall Time <sup>(2)</sup>                 | 0.8V – 2.0V | 1.5  |       |
| t <sub>SK(p)</sub>                   | Pulse Skew (same pkg) <sup>(1,2)</sup>        | CL = 15pF   | 0.35 |       |
| t <sub>SK(o)</sub>                   | Output Skew (same pkg.) <sup>(1,2)</sup>      |             | 0.2  |       |
| t <sub>SK(i)</sub>                   | Output Skew (different pkg.) <sup>(1,2)</sup> |             | 0.55 |       |
| F <sub>IN</sub>                      | Input Frequency <sup>(1,2)</sup>              |             | 133  | MHz   |


### Notes:



- Other loading condition is described on page 4, “Test Circuits for All Outputs.”
- These parameters are guaranteed by design.
- Minimum propagation delay of 1.5ns is guaranteed by design.

## Switching Waveforms

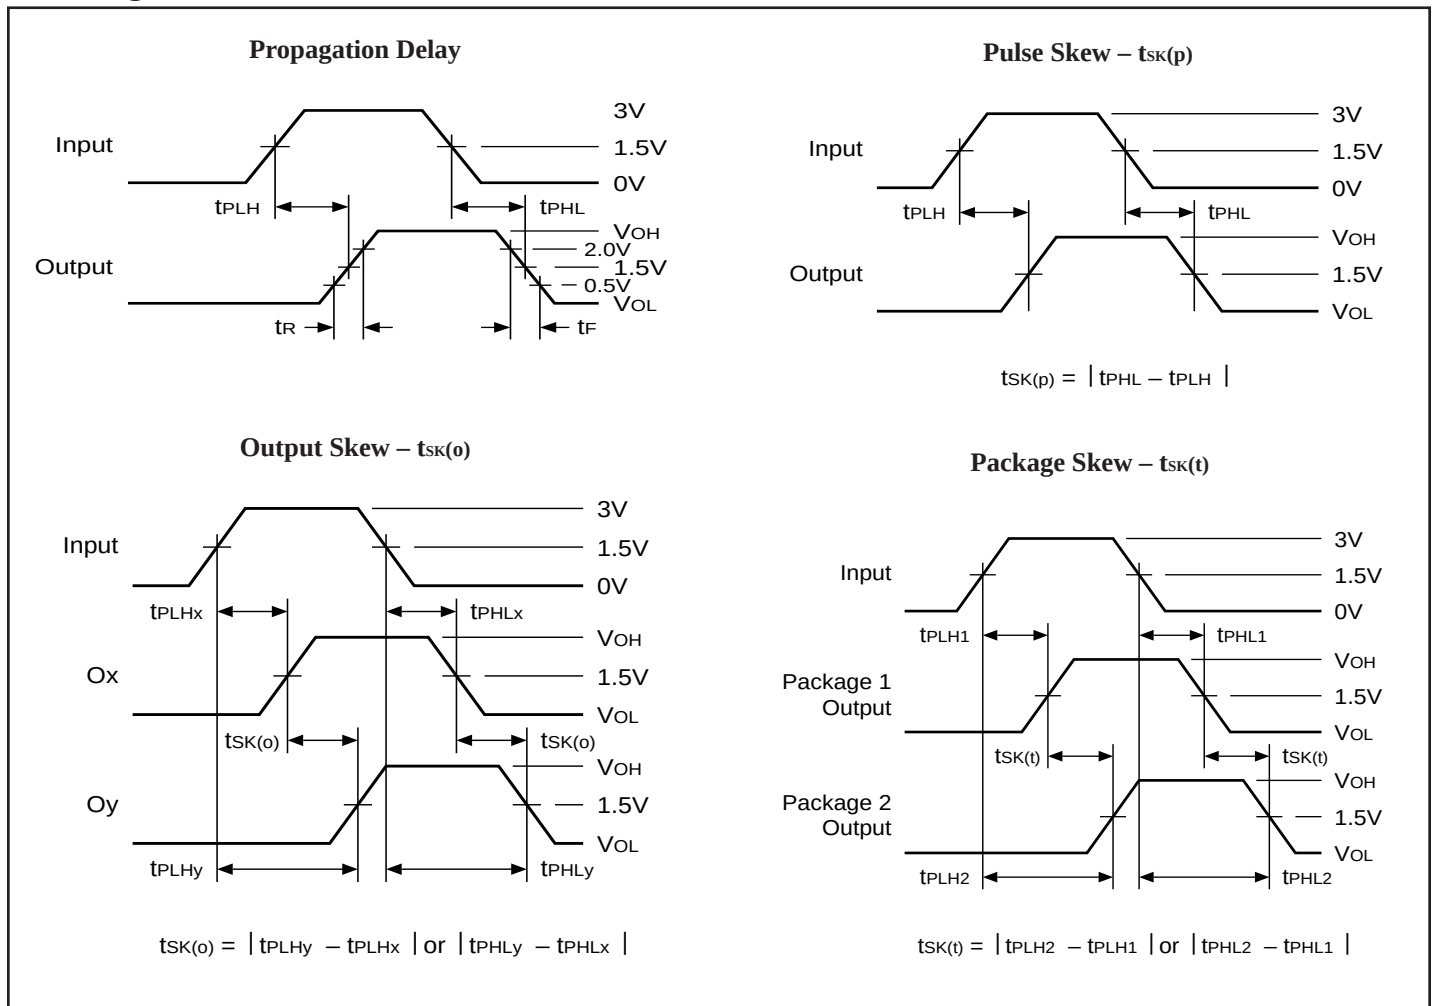

## Tests Circuits for All Outputs

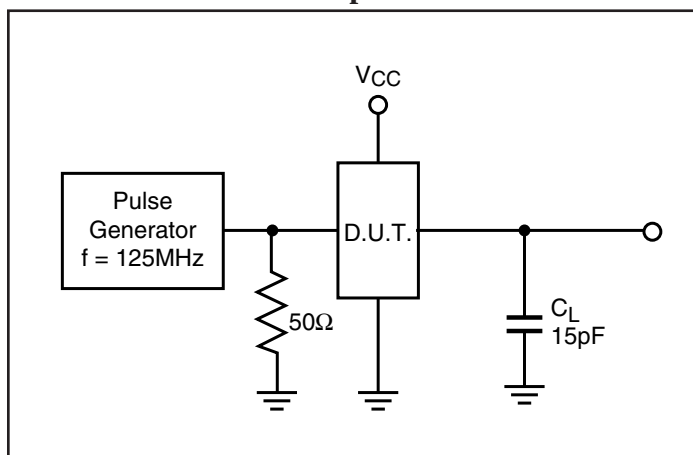

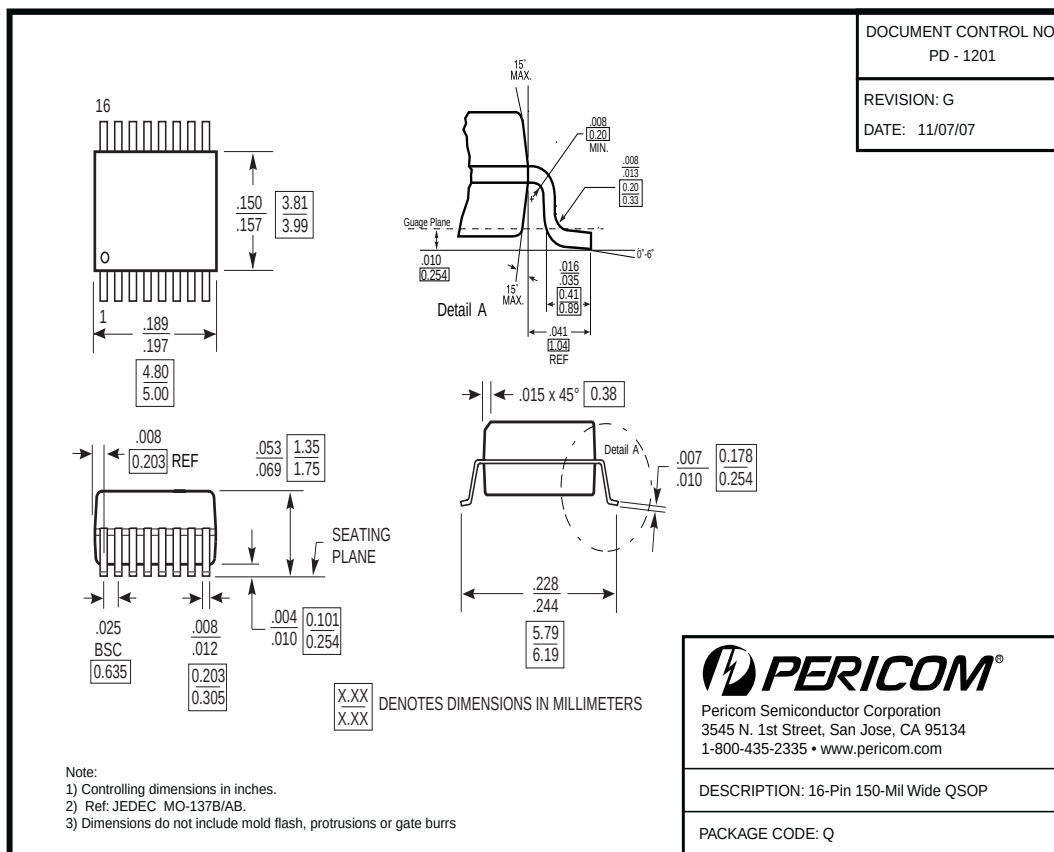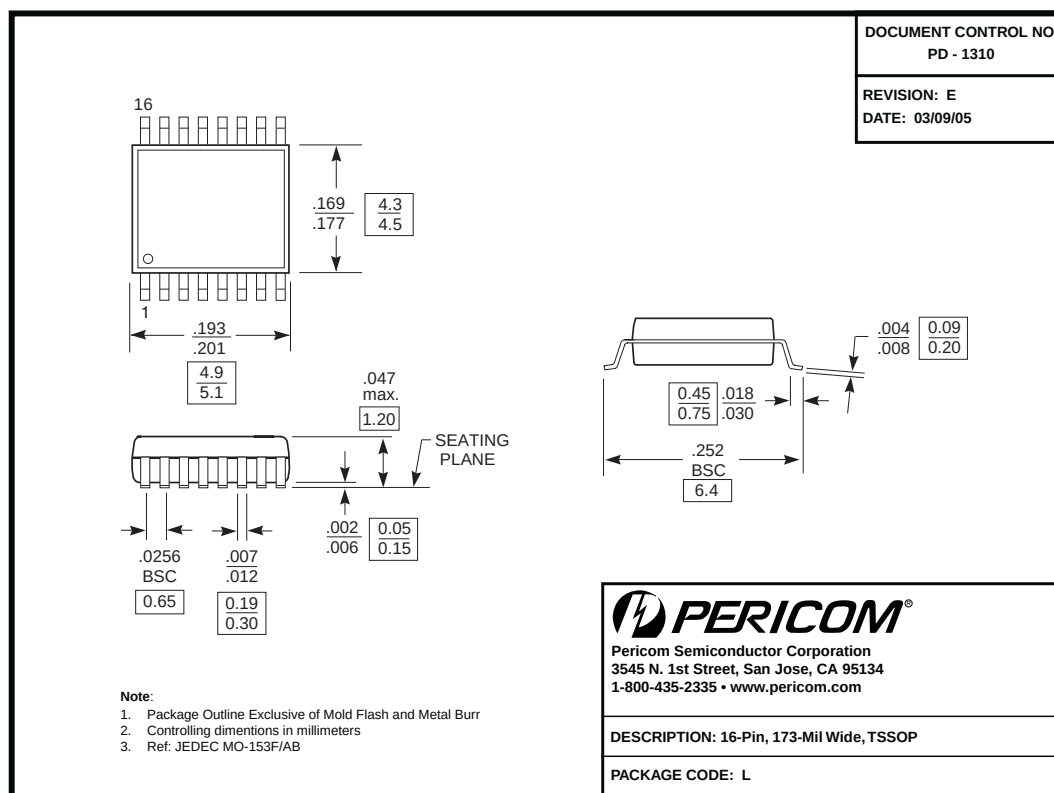**Packaging Mechanical: 16-pin QSOP (Q)**

**Packaging Mechanical: 16-pin TSSOP (L)**


**Ordering Information**

| Ordering Code  | Packaging Code | Package Type                             |
|----------------|----------------|------------------------------------------|
| PI49FCT32802QE | Q              | Pb-free and Green, 16-pin, 150-mil QSOP  |
| PI49FCT32802LE | L              | Pb-free and Green, 16-pin, 173-mil TSSOP |
| PI49FCT32803QE | Q              | Pb-free and Green, 16-pin, 150-mil QSOP  |
| PI49FCT32803LE | L              | Pb-free and Green, 16-pin, 173-mil TSSOP |

**Notes:**

1. Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)