

Customer Information Sheet

DRAWING No.: S0941-46R

IF IN DOUBT - ASK

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

SPECIFICATION.

MATERIAL:

CONTACT = STAINLESS STEEL, 0.15mm THICK

FINISH:

1.0 μm

ELECTRICAL:

RESISTANCE = 100mΩ MAX

MECHANICAL ·

INSERTION FORCE = 9.8N MAX

WITHDRAWAL FORCE = 0.69N MIN

ENVIRONMENTAL ·

ENVIRONMENTAL:
OPERATING TEMPERATURE - -40°C TO $+85^{\circ}\text{C}$

CRYSTALLINITY TEMPERATURE = -40°C TO $+30^{\circ}\text{C}$
STORAGE TEMPERATURE = -40°C TO $+85^{\circ}\text{C}$








STORAGE LIMITS
COLLECTING DATA:

SOULDERING DATA:
SOULDERING HEAT RESISTANCE - 250°C FOR 5 SECONDS

NOTES:

FOR USE WITH 015+0 01/-0 015mm THICK SHIELD CANS

2 QUANTITY PER REEL = 10 000

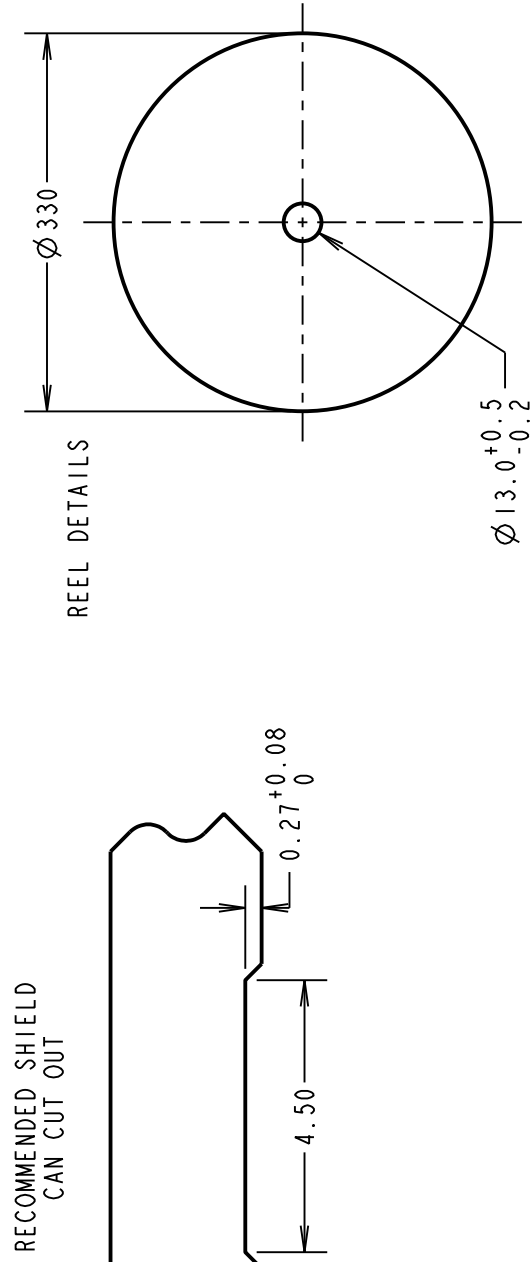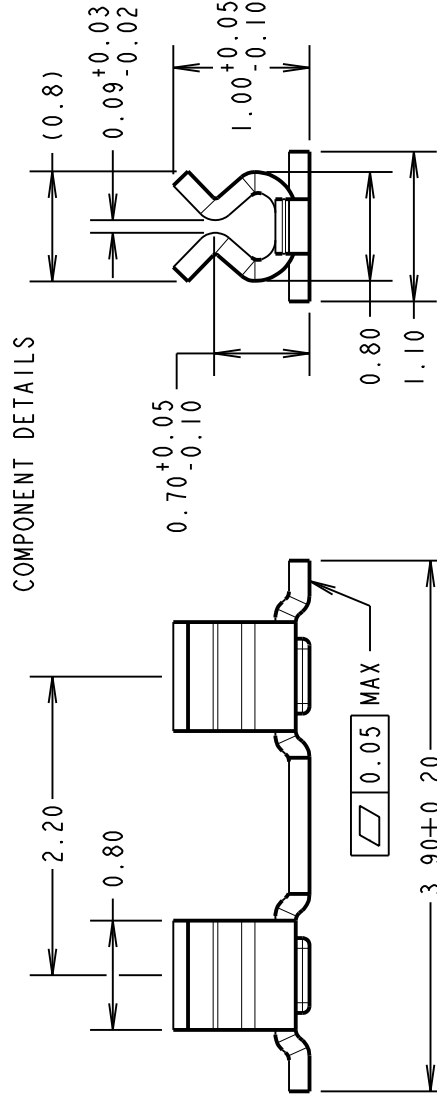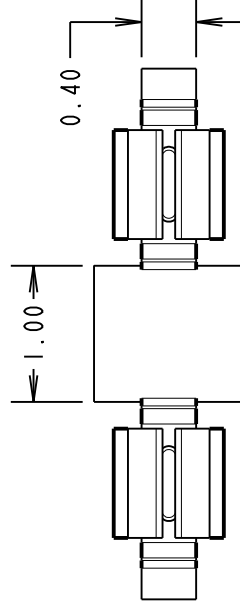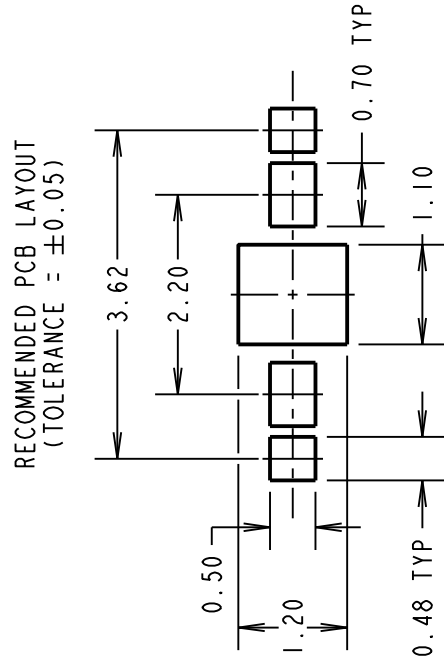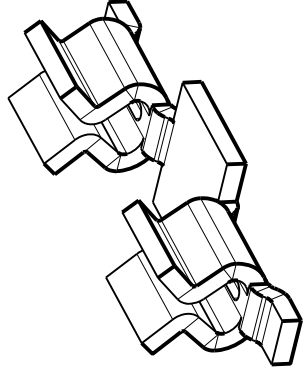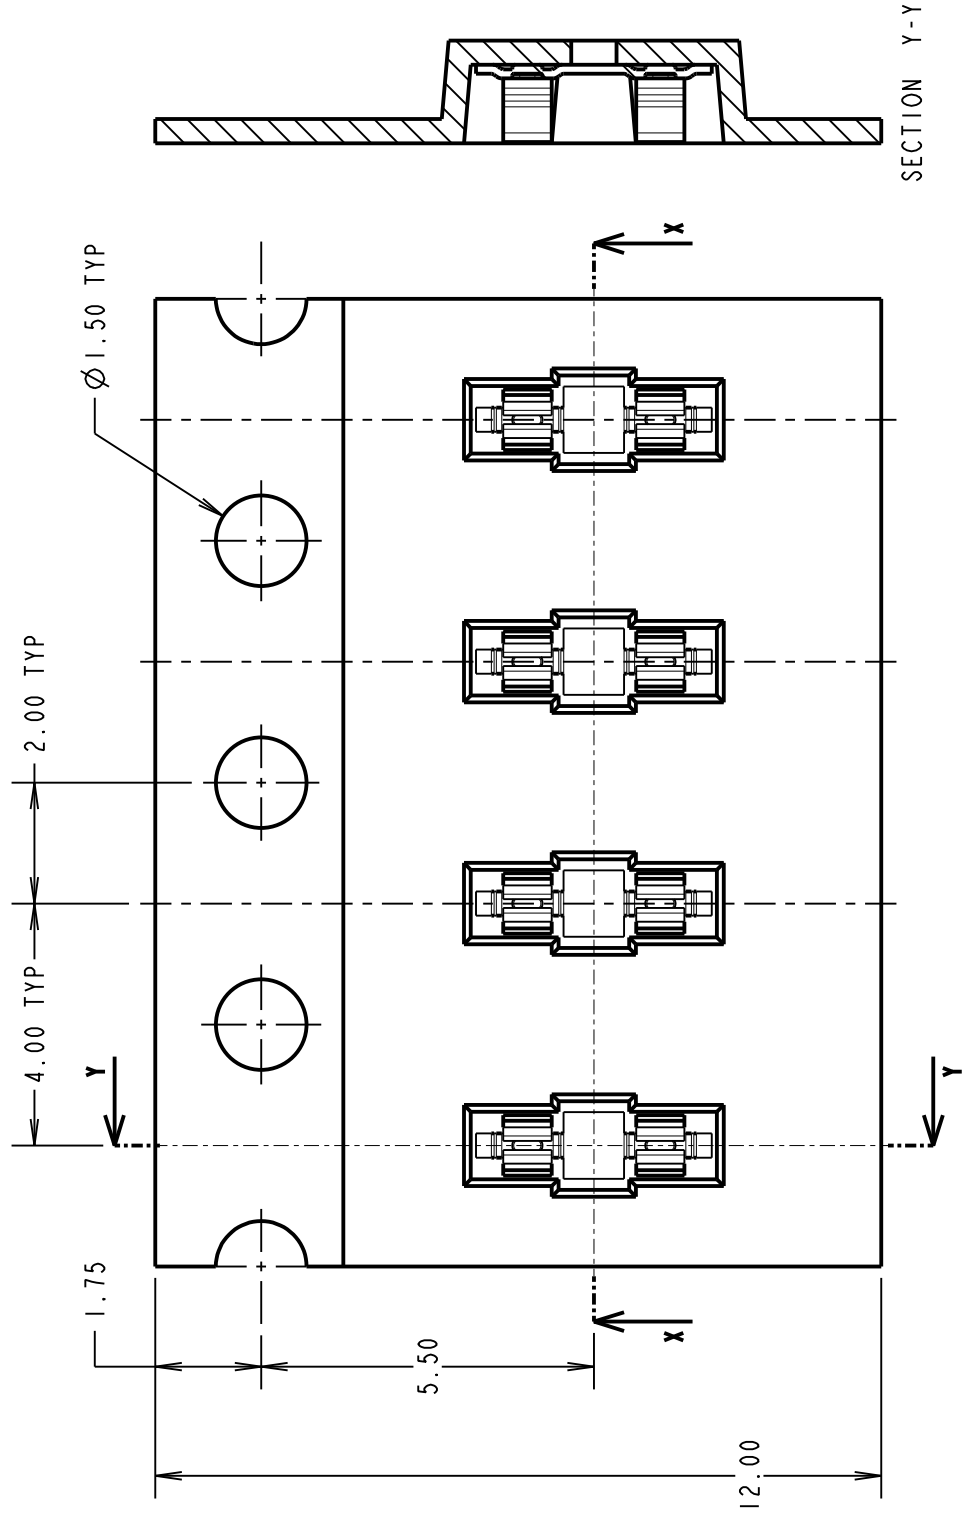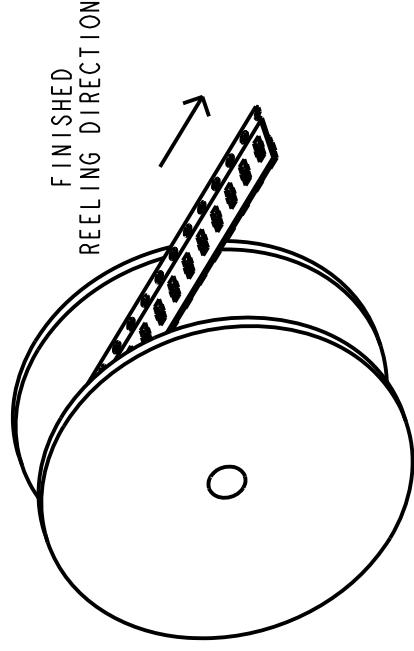

MGP	4	20.01.20	22153
NAME	ISS.	DATE	C/NOTE
APPROVED: MGP			
CHECKED: RP			
DRAWN: S.BENNETT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARVIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
.XX = ±0.20mm
XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:	FINISH:	S/AREA:
-----------	---------	---------

MATERIAL: SEE ABOVE

DRAWING NUMBER:

FINISH: SEE ABOVE	mm 2
S/AREA:	

TITLE: SMT RFI SHIELD CLIP
IN TAPE AND REEL

S0941 - 46R

SHT
2 OF 2