


3M™ PAK 100 SHUNT
.100" MIDGIE, 929 SERIES

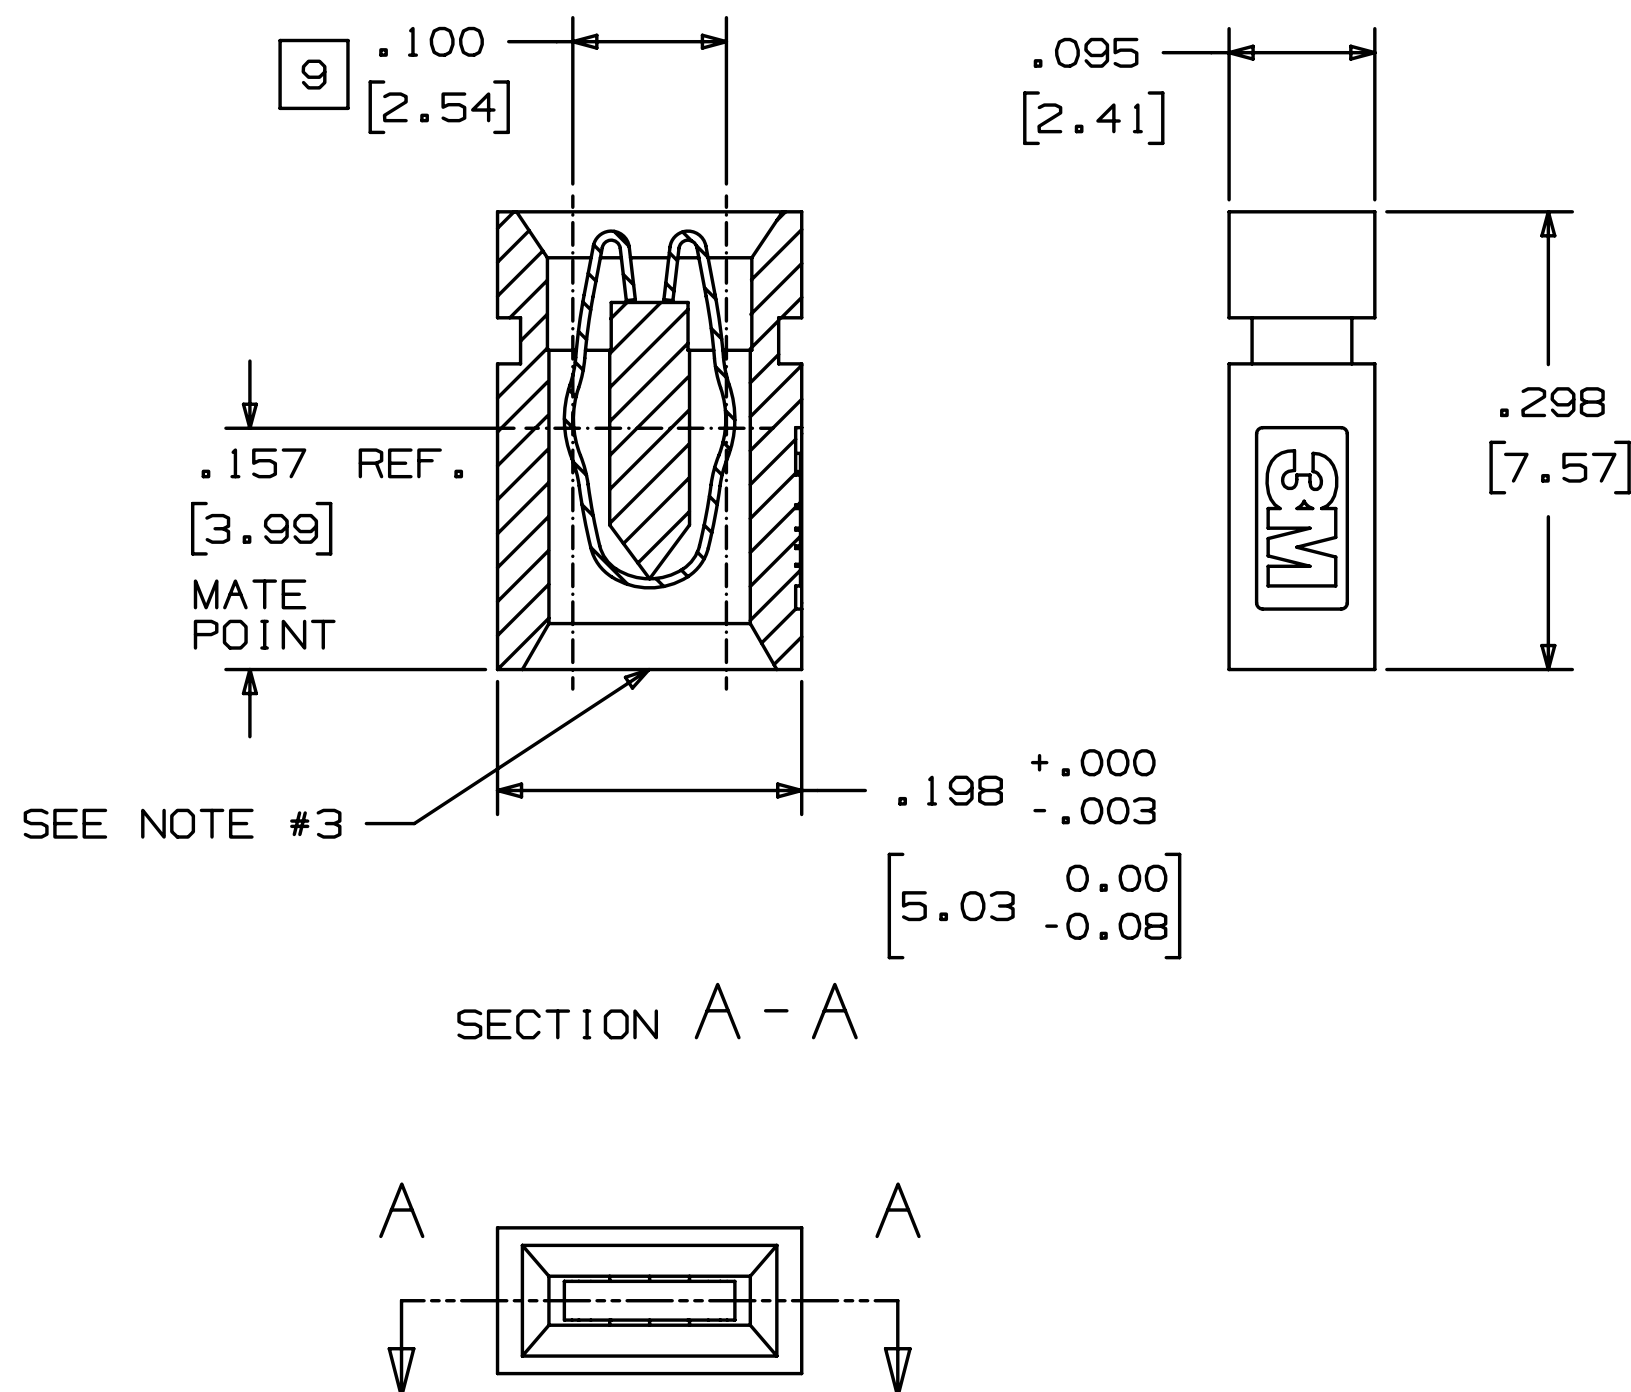

SECTION A - A

PERFORMANCE [7]	
CURRENT RATING:	1A
INSULATION RESISTANCE:	>1X10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	1500 Vrms AT SEA LEVEL
TEMPERATURE RATING:	-55°C TO +100°C

ORDERING INFORMATION

92995X-XX

COLOR-PLATING OPTIONS:
0-00 = BLACK-100-200μ" MATTE TIN
5-06 = BLUE-10μ" GOLD
7-08 = GRAY-30μ" GOLD

3M™ ELECTRONIC SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3M.com/interconnects/>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

us
UL FILE NO: E68080

DIMENSIONS IN INCHES,
SECONDARY IN MM

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	SEP 21, 2011	JNC	SF
DISTRIBUTION CODES		DRFT	CATIGLIONE	DATE	SEP 21, 2011	DATE
DIVISION		CHKD	S. FELDMAN	DATE	SEP 23, 2011	DATE
Interconnect Solutions		3M COPY RIGHT 2011				
DO NOT SCALE DRAWING		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
THIRD ANGLE PROJECTION		PAK 100 SHUNT, .100 MIDGIE, TS-0200				
INTERPRET PER ASME Y14.5 - 1994		CAGE NUMBER				
MAX SURFACE ROUGHNESS		DRAWING NO. 78-5100-0200-5				
ALL SURFACES		REV. B				
MARKED ONLY		MODEL 929XXX				
		DET. LISTS				
		YES NO SHT 1 OF 1				