

TABLE OF CONTENTS

| | |
|----------------------------------|---|
| Features | 1 |
| Applications..... | 1 |
| Pin Configurations | 1 |
| General Description | 1 |
| Revision History | 2 |
| Specifications..... | 3 |
| Electrical Characteristics | 3 |

REVISION HISTORY

5/2016—Rev. C to Rev. D

| | |
|----------------------------------|------------|
| Changed CP-8-2 to CP-8-13 | Throughout |
| Changes to Figure 2..... | 1 |
| Changes to Table 4..... | 5 |
| Updated Outline Dimensions | 13 |
| Changes to Ordering Guide | 15 |

4/2013—Rev. B to Rev. C

| | |
|--|----|
| Changes to Figure 2..... | 1 |
| Added Exposed Pad Notation to Outline Dimensions | 14 |
| Changes to Ordering Guide | 15 |

1/2008—Rev. A to Rev. B

| | |
|---|-----------|
| Added TSSOP | Universal |
| Change to Table 4 | 5 |
| Changes to Figure 8 and Figure 9..... | 6 |
| Changes to Figure 23 and Figure 26..... | 9 |
| Updated Outline Dimensions | 13 |
| Changes to Ordering Guide | 15 |

| | |
|---|----|
| Absolute Maximum Ratings | 5 |
| Thermal Resistance..... | 5 |
| ESD Caution..... | 5 |
| Typical Performance Characteristics | 6 |
| Outline Dimensions | 13 |
| Ordering Guide | 15 |

10/2007—Rev. 0 to Rev. A

| | |
|---|-----------|
| Added AD8667 and AD8669..... | Universal |
| Changes to Features | 1 |
| Changes to General Description | 1 |
| Inserted Figure 3 and Figure 4..... | 1 |
| Changes to Table 1, Power Supply Section..... | 3 |
| Changes to Table 2..... | 4 |
| Reformatted Typical Performance Characteristics Section | 6 |
| Changes to Figure 5..... | 6 |
| Changes to Figure 13..... | 7 |
| Changes to Figure 17 and Figure 20 | 8 |
| Inserted Figure 35 through Figure 39..... | 11 |
| Inserted Figure 40 and Figure 41..... | 12 |
| Updated Outline Dimensions | 13 |
| Changes to Ordering Guide | 15 |

7/2007—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

$V_{SY} = 5.0\text{ V}$, $V_{CM} = V_{SY}/2$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|------------------------------|------------------|--|------|---------|-----|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $V_{CM} = V_{SY}/2$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 30 | 175 | μV |
| Input Bias Current | I_B | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.3 | 450 | μV |
| | | | | | 45 | pA |
| Input Offset Current | I_{OS} | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.2 | 105 | pA |
| | | | | | 35 | pA |
| Input Voltage Range | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 0.2 | | 65 | pA |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = 0.2\text{ V to } 3.0\text{ V}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 76 | 100 | dB |
| | | | | 76 | 100 | dB |
| Large Signal Voltage Gain | A_{VO} | $R_L = 100\text{ k}\Omega$, $V_{OUT} = 0.5\text{ V to } 4.5\text{ V}$ $R_L = 2\text{ k}\Omega$, $V_{OUT} = 0.5\text{ V to } 4.5\text{ V}$ | | 115 | 140 | dB |
| | | | | 106 | 114 | dB |
| Offset Voltage Drift | TCV_{OS} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1.5 | 5 | $\mu\text{V}/^\circ\text{C}$ |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage High | V_{OH} | $I_L = 100\text{ }\mu\text{A}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 4.95 | 4.97 | | V |
| | | | 4.90 | | | V |
| Output Voltage High | V_{OH} | $I_L = 1\text{ mA}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 4.65 | 4.80 | | V |
| | | | 4.60 | | | V |
| Output Voltage Low | V_{OL} | $I_L = 100\text{ }\mu\text{A}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 17 | 25 | mV |
| | | | | | 35 | mV |
| Output Voltage Low | V_{OL} | $I_L = 1\text{ mA}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 150 | 200 | mV |
| | | | | | 250 | mV |
| Short-Circuit Current | I_{SC} | | | ± 7 | | mA |
| Closed-Loop Output Impedance | Z_{OUT} | $f = 100\text{ kHz}$, $A_V = 1$ | | 120 | | Ω |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | $V_{SY} = 5\text{ V to } 16\text{ V}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 95 | 105 | | dB |
| | | | 95 | | | dB |
| Supply Current per Amplifier | I_{SY} | $V_{OUT} = V_{SY}/2$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 210 | 275 | μA |
| | | | | | 325 | μA |
| DYNAMIC PERFORMANCE | | | | | | |
| Slew Rate | SR | $R_L = 2\text{ k}\Omega$ | | 0.26 | | $\text{V}/\mu\text{s}$ |
| Gain Bandwidth Product | GBP | $C_L = 20\text{ pF}$ | | 520 | | kHz |
| Phase Margin | Φ_M | $C_L = 20\text{ pF}$ | | 60 | | Degrees |
| NOISE PERFORMANCE | | | | | | |
| Peak-to-Peak Noise | $e_n\text{ p-p}$ | $f = 0.1\text{ Hz to } 10\text{ Hz}$ | | 2.5 | | $\mu\text{V p-p}$ |
| Voltage Noise Density | e_n | $f = 1\text{ kHz}$ | | 23 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | $f = 10\text{ kHz}$ | | 21 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| Current Noise Density | i_n | $f = 1\text{ kHz}$ | | 0.05 | | $\text{pA}/\sqrt{\text{Hz}}$ |

$V_{SY} = 16.0\text{ V}$, $V_{CM} = V_{SY}/2$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 2.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|-------------------------------|------------------|--|-------|----------|------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $V_{CM} = V_{SY}/2$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 40 | 300 | μV |
| Input Bias Current | I_B | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.3 | 45 | μA |
| Input Offset Current | I_{OS} | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.2 | 120 | μA |
| Input Voltage Range | | | 0.2 | | 14.5 | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = 0.2\text{ V to } 14.5\text{ V}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 87 | 109 | | dB |
| Large Signal Voltage Gain | A_{VO} | $R_L = 100\text{ k}\Omega$, $V_{OUT} = 0.5\text{ V to } 15.5\text{ V}$ $R_L = 2\text{ k}\Omega$, $V_{OUT} = 0.5\text{ V to } 15.5\text{ V}$ | 115 | 140 | | dB |
| Offset Voltage Drift | TCV_{OS} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1.5 | 5 | $\mu\text{V}/^\circ\text{C}$ |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage High | V_{OH} | $I_L = 100\text{ }\mu\text{A}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 15.95 | 15.98 | | V |
| Output Voltage High | V_{OH} | $I_L = 1\text{ mA}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 15.85 | 15.92 | | V |
| Output Voltage Low | V_{OL} | $I_L = 100\text{ }\mu\text{A}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 17 | 25 | mV |
| Output Voltage Low | V_{OL} | $I_L = 1\text{ mA}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 70 | 100 | mV |
| Short-Circuit Current | I_{SC} | | | ± 50 | 125 | mV |
| Closed-Loop Output Impedance | Z_{OUT} | $f = 100\text{ kHz}$, $A_V = 1$ | | 100 | | Ω |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | $V_{SY} = 5\text{ V to } 16\text{ V}$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 95 | 105 | | dB |
| Supply Current per Amplifier | I_{SY} | $V_{OUT} = V_{SY}/2$ $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 230 | 285 | μA |
| | | | | | 355 | μA |
| DYNAMIC PERFORMANCE | | | | | | |
| Slew Rate | SR | $R_L = 2\text{ k}\Omega$ | | 0.3 | | $\text{V}/\mu\text{s}$ |
| Gain Bandwidth Product | GBP | $C_L = 20\text{ pF}$ | | 540 | | kHz |
| Phase Margin | Φ_M | $C_L = 20\text{ pF}$ | | 64 | | Degrees |
| NOISE PERFORMANCE | | | | | | |
| Peak-to-Peak Noise | $e_n\text{ p-p}$ | $f = 0.1\text{ Hz to } 10\text{ Hz}$ | | 2.5 | | $\mu\text{V p-p}$ |
| Voltage Noise Density | e_n | $f = 1\text{ kHz}$ $f = 10\text{ kHz}$ | | 23 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| Current Noise Density | i_n | $f = 1\text{ kHz}$ | | 21 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | | | 0.05 | | $\text{pA}/\sqrt{\text{Hz}}$ |

ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter | Rating |
|--------------------------------------|--------------------|
| Supply Voltage | 18 V |
| Input Voltage | -0.1 V to V_{SY} |
| Differential Input Voltage | 18 V |
| Output Short-Circuit Duration to GND | Indefinite |
| Storage Temperature Range | -60°C to +150°C |
| Operating Temperature Range | -40°C to +125°C |
| Junction Temperature Range | -65°C to +150°C |
| Lead Temperature, Soldering (60 sec) | 300°C |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4. Thermal Resistance

| Package Type | θ_{JA} | θ_{JC} | Unit |
|------------------------|-----------------|-----------------|------|
| 8-Lead SOIC (R-8) | 121 | 43 | °C/W |
| 8-Lead LFCSP (CP-8-13) | 75 ¹ | 18 ¹ | °C/W |
| 8-Lead MSOP (RM-8) | 145 | 45 | °C/W |
| 14-Lead SOIC (R-14) | 90 | 45 | °C/W |
| 14-Lead TSSOP (RU-14) | 180 | 35 | °C/W |

¹ Exposed pad soldered to application board.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

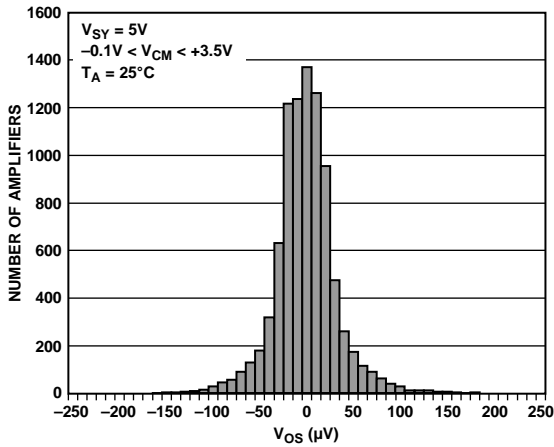


Figure 5. Input Offset Voltage Distribution

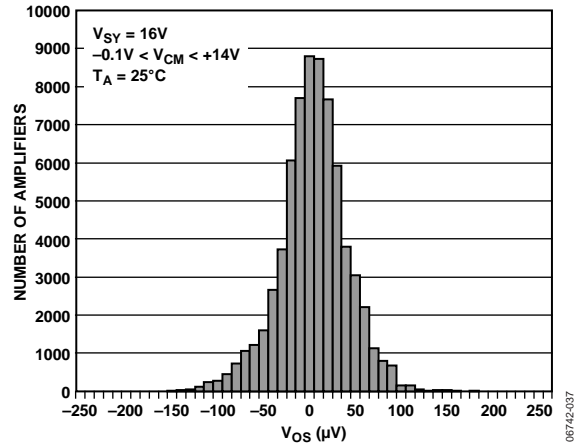


Figure 8. Input Offset Voltage Distribution

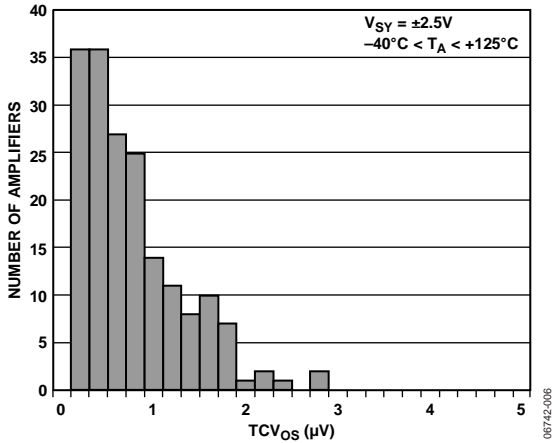


Figure 6. Offset Voltage Drift Distribution

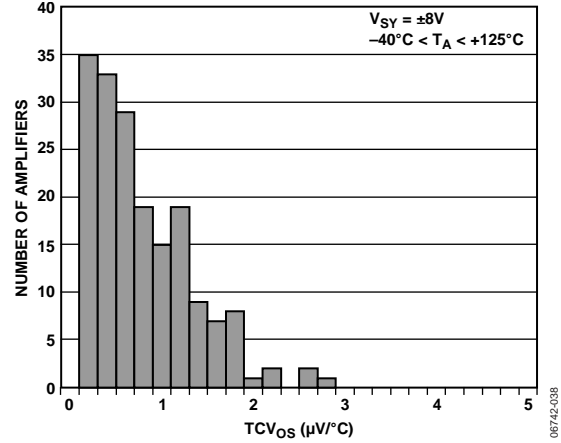


Figure 9. Offset Voltage Drift Distribution

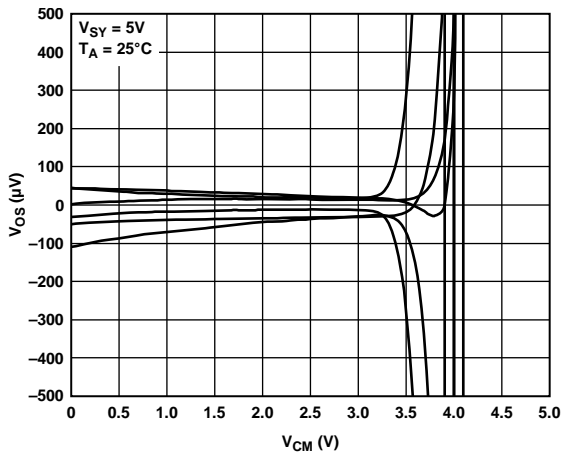


Figure 7. Input Offset Voltage vs. Common-Mode Voltage

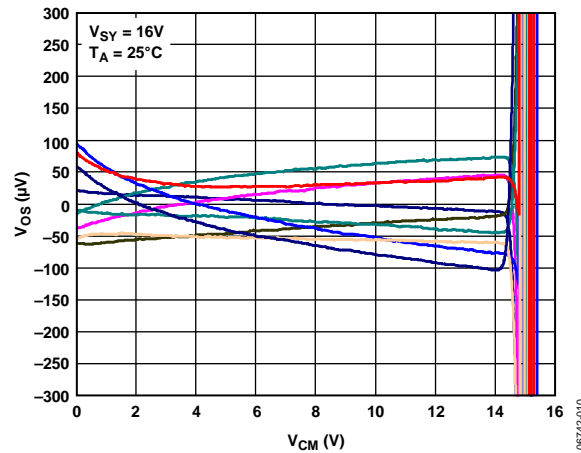


Figure 10. Input Offset Voltage vs. Common-Mode Voltage

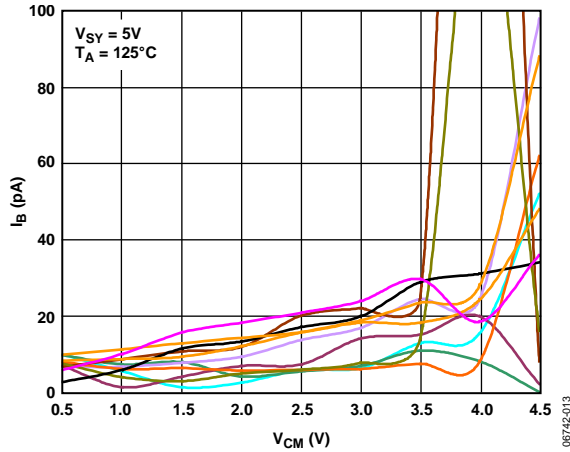


Figure 11. Input Bias Current vs. Common-Mode Voltage at 125°C

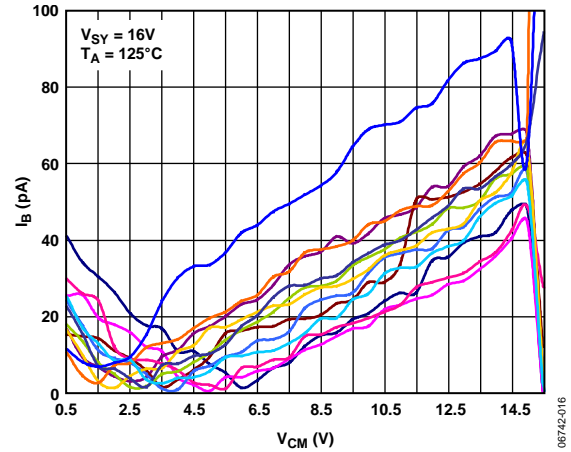


Figure 14. Input Bias Current vs. Common-Mode Voltage at 125°C

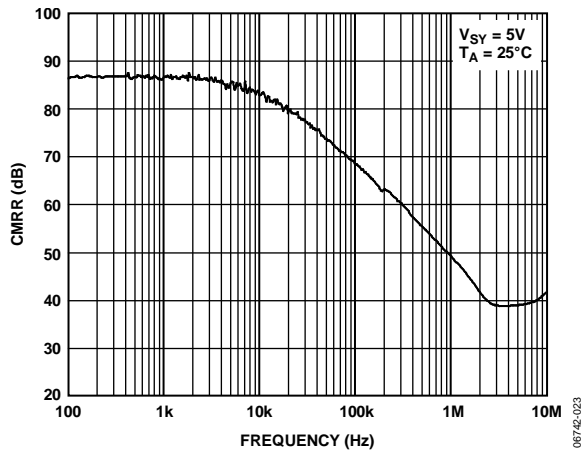


Figure 12. CMRR vs. Frequency, $V_{SY} = 5V$

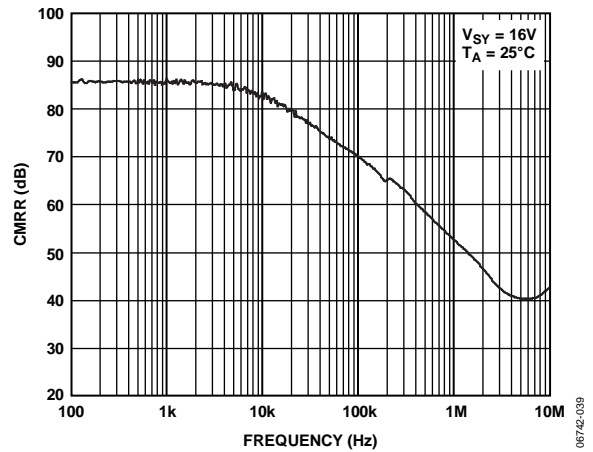


Figure 15. CMRR vs. Frequency, $V_{SY} = 16V$

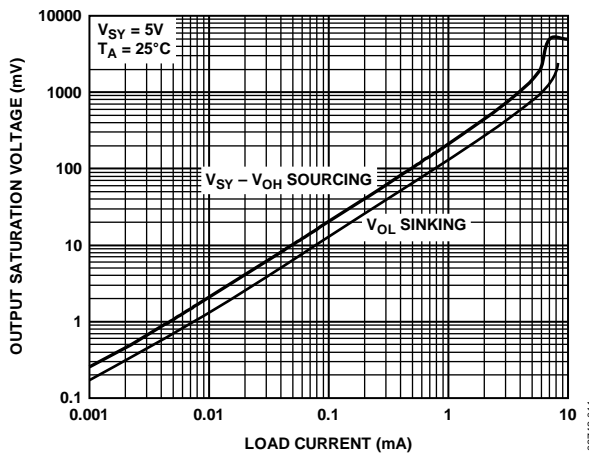


Figure 13. Output Swing Saturation Voltage vs. Load Current

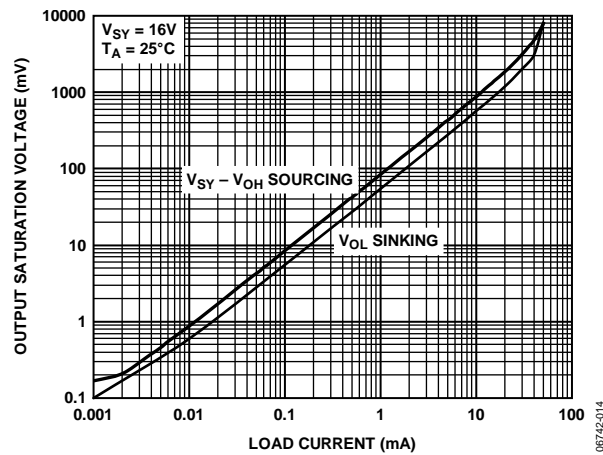


Figure 16. Output Swing Saturation Voltage vs. Load Current

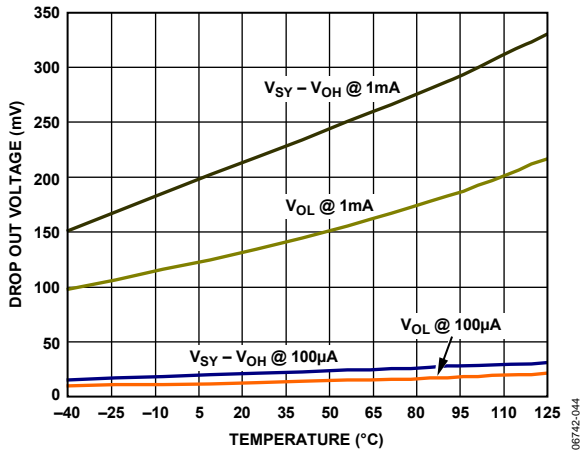


Figure 17. Output Voltage Saturation vs. Temperature

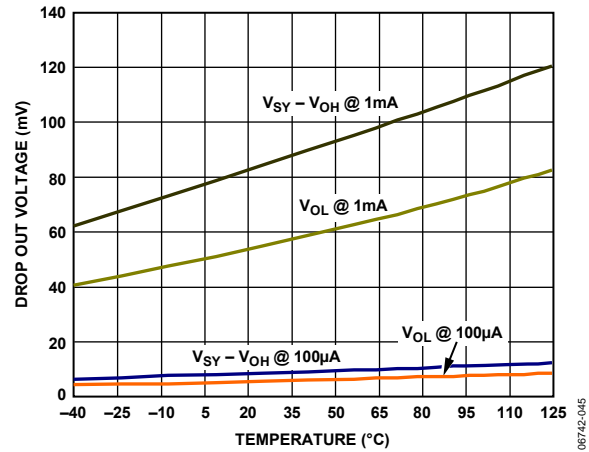


Figure 20. Output Voltage Saturation vs. Temperature

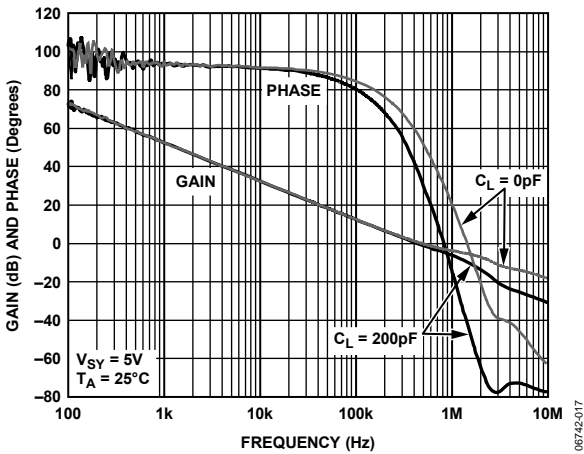


Figure 18. Open-Loop Gain and Phase Shift vs. Frequency

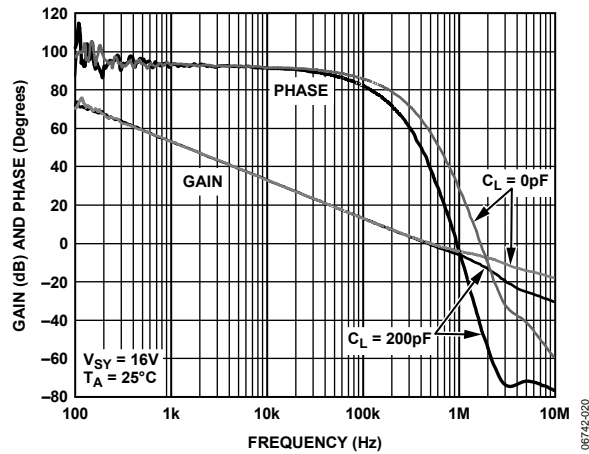


Figure 21. Open-Loop Gain and Phase Shift vs. Frequency

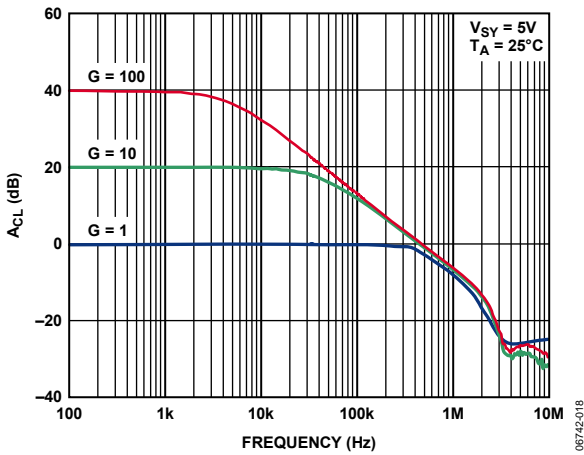


Figure 19. Closed-Loop Gain vs. Frequency

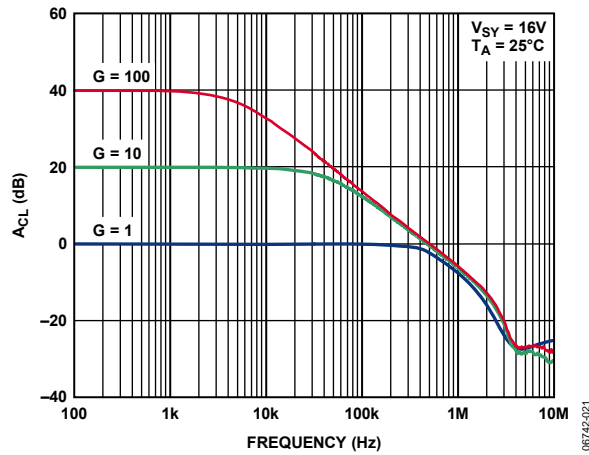


Figure 22. Closed-Loop Gain vs. Frequency, $V_{SY} = 16V$

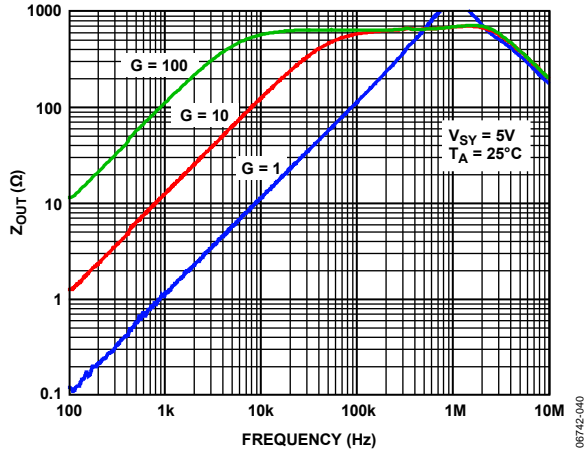


Figure 23. Closed-Loop Output Impedance vs. Frequency, $V_{SY} = 5 V$

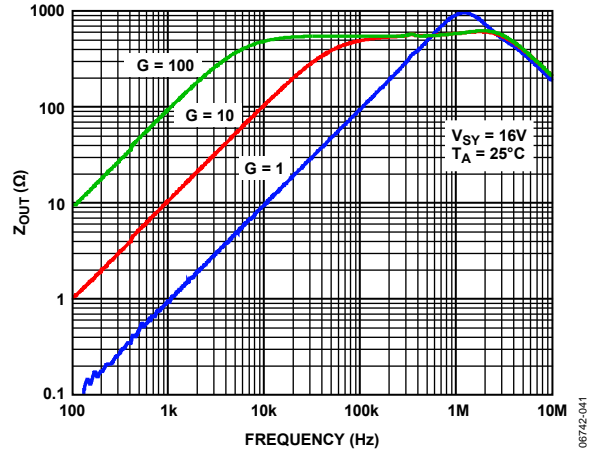


Figure 26. Closed-Loop Output Impedance vs. Frequency, $V_{SY} = 16 V$

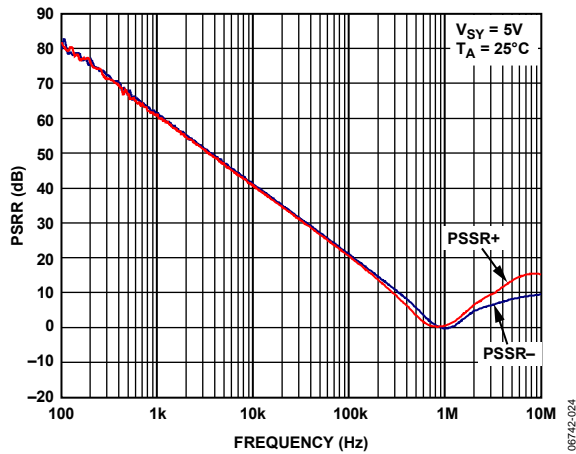


Figure 24. PSRR vs. Frequency, $V_{SY} = 5 V$

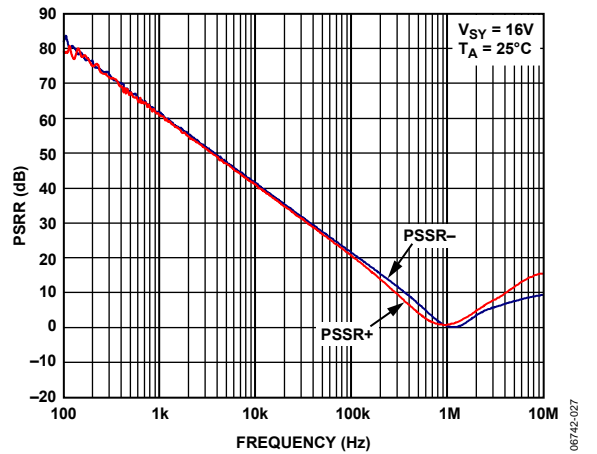


Figure 27. PSRR vs. Frequency, $V_{SY} = 16 V$

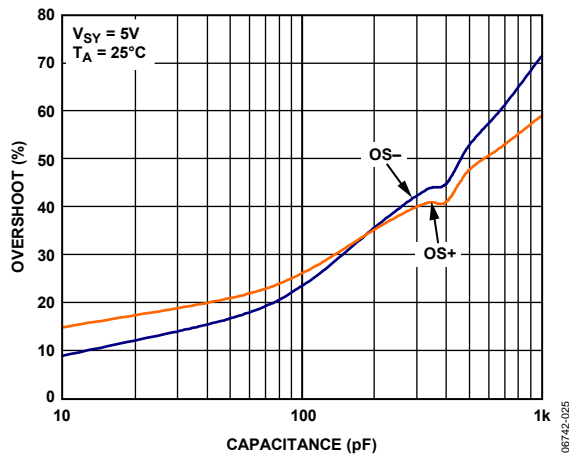


Figure 25. Small-Signal Overshoot vs. Load Capacitance, $V_{SY} = 5 V$

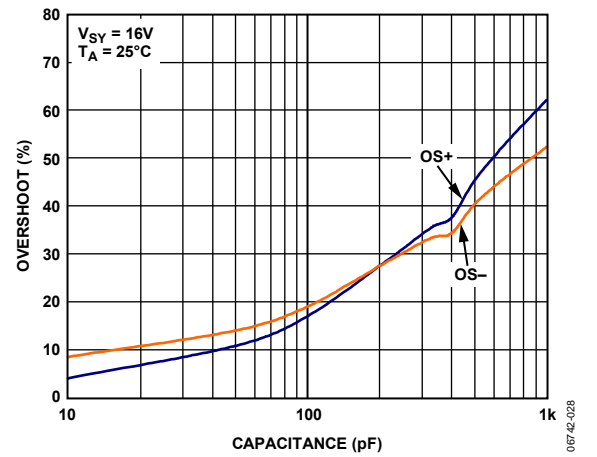


Figure 28. Small-Signal Overshoot vs. Load Capacitance, $V_{SY} = 16 V$

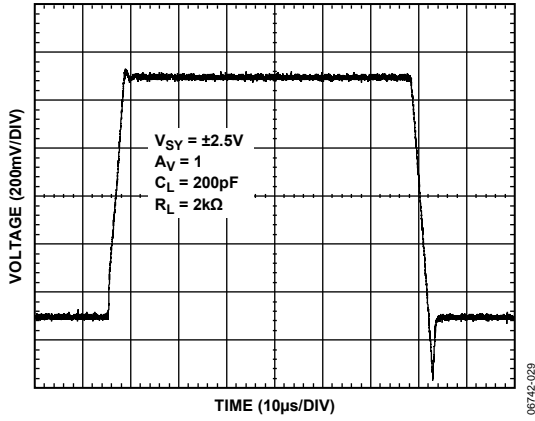


Figure 29. Large Signal Transient Response, $V_{SY} = \pm 2.5\text{ V}$

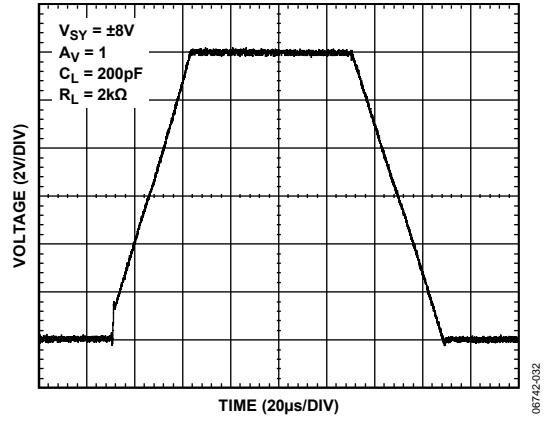


Figure 32. Large Signal Transient Response, $V_{SY} = \pm 8\text{ V}$

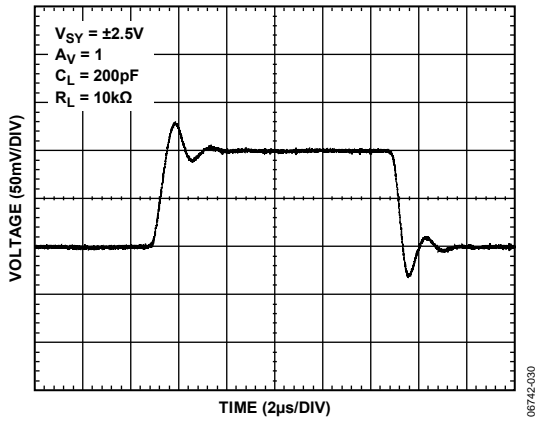


Figure 30. Small Signal Transient Response, $V_{SY} = \pm 2.5\text{ V}$

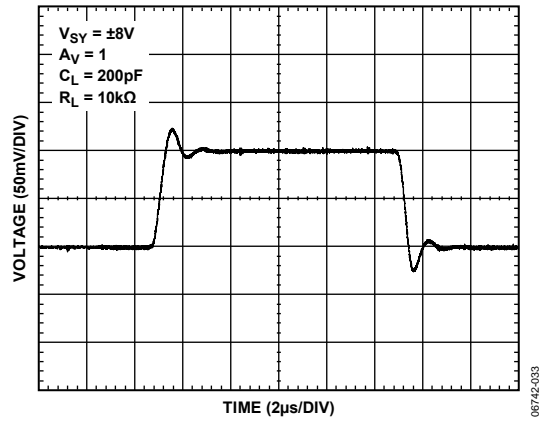


Figure 33. Small Signal Transient Response, $V_{SY} = \pm 8\text{ V}$

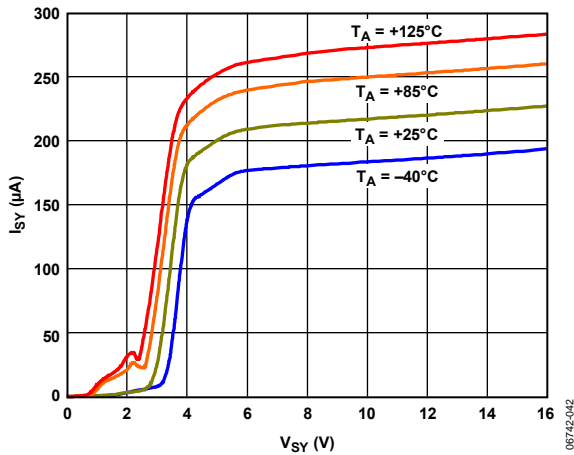


Figure 31. AD8663, Supply Current vs. Supply Voltage

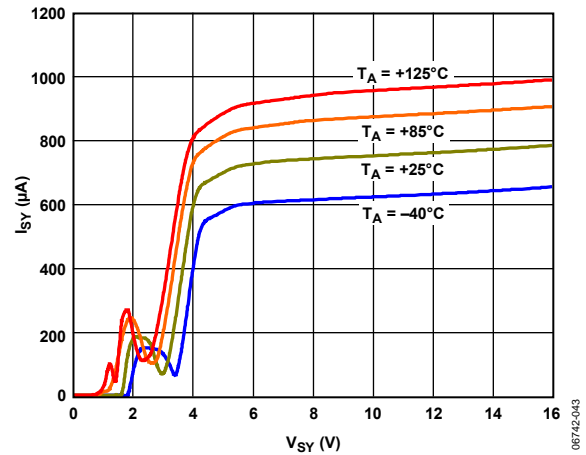


Figure 34. AD8669, Supply Current vs. Supply Voltage

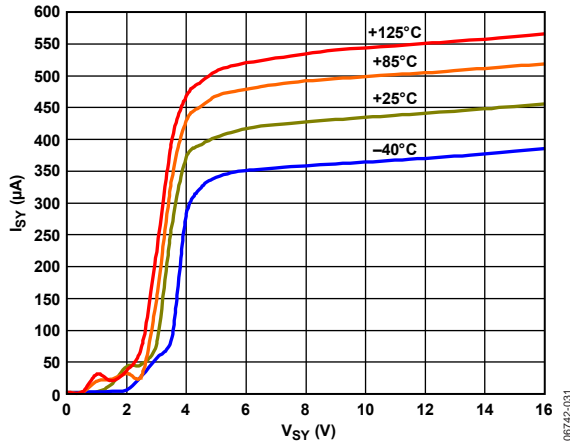


Figure 35. AD8667, Supply Current vs. Supply Voltage

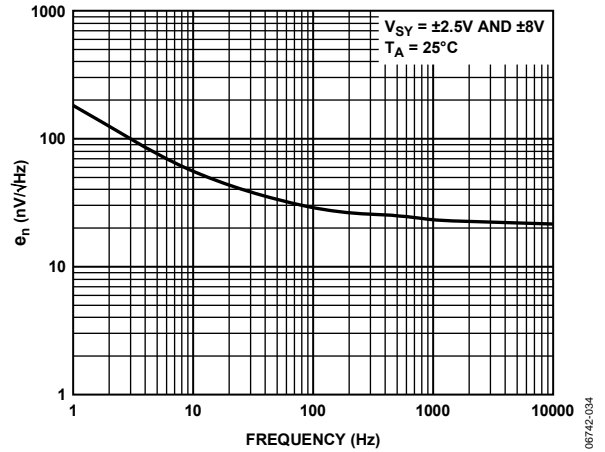


Figure 38. Voltage Noise Density

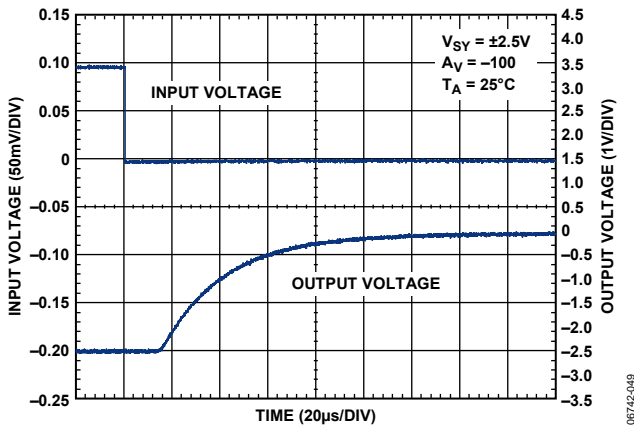


Figure 36. Positive Overload Recovery

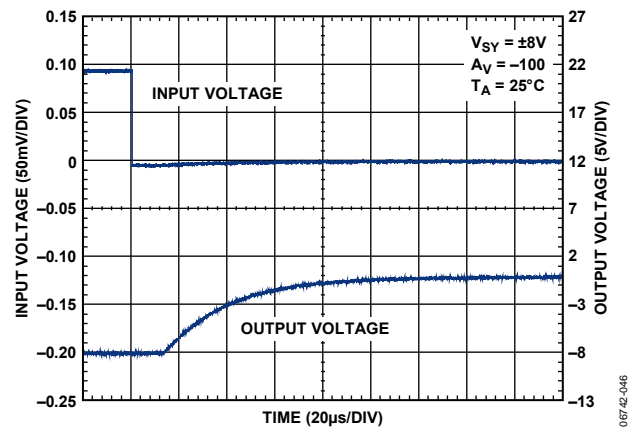


Figure 39. Positive Overload Recovery

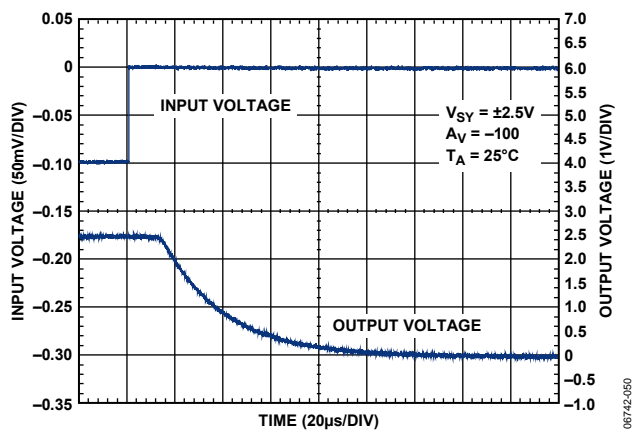


Figure 37. Negative Overload Recovery

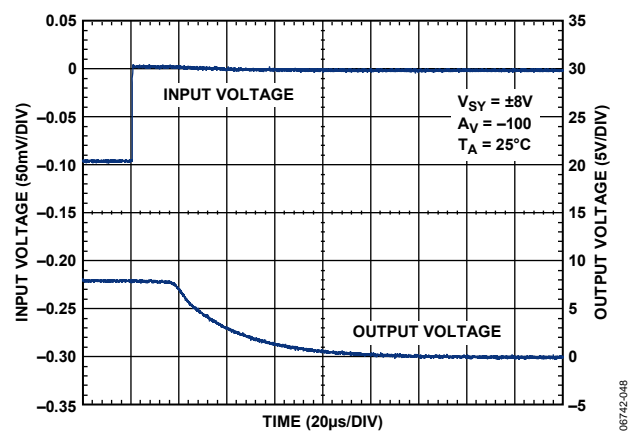


Figure 40. Negative Overload Recovery

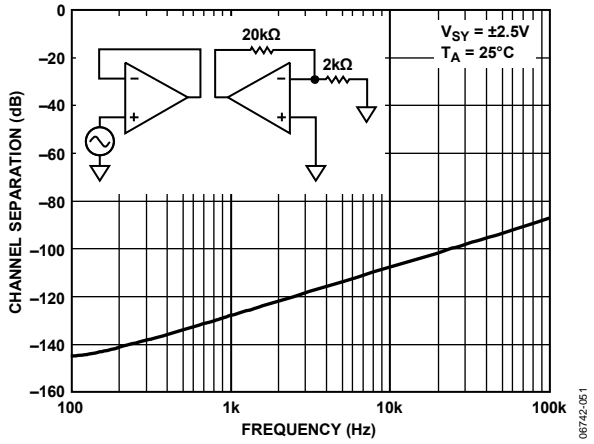


Figure 41. Channel Separation vs. Frequency


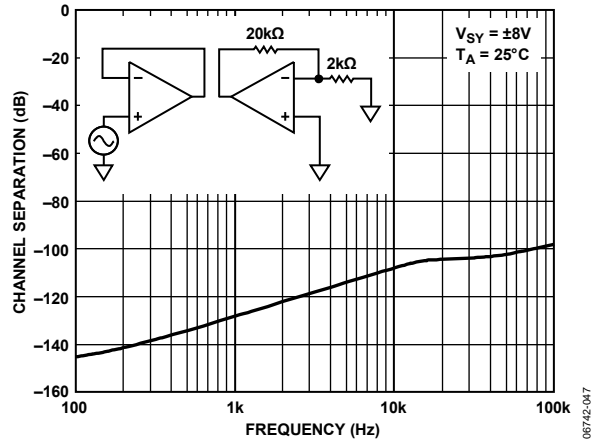


Figure 42. Channel Separation vs. Frequency


OUTLINE DIMENSIONS

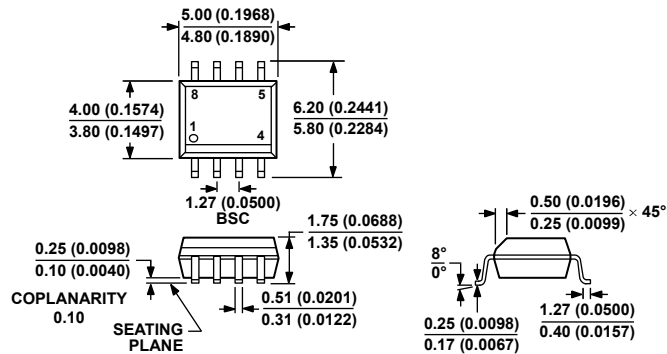

COMPLIANT TO JEDEC STANDARDS MS-012-AA
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 43. 8-Lead Small Outline Package [SOIC_N]
 Narrow Body
 (R-8)


Dimensions shown in millimeters and (inches)

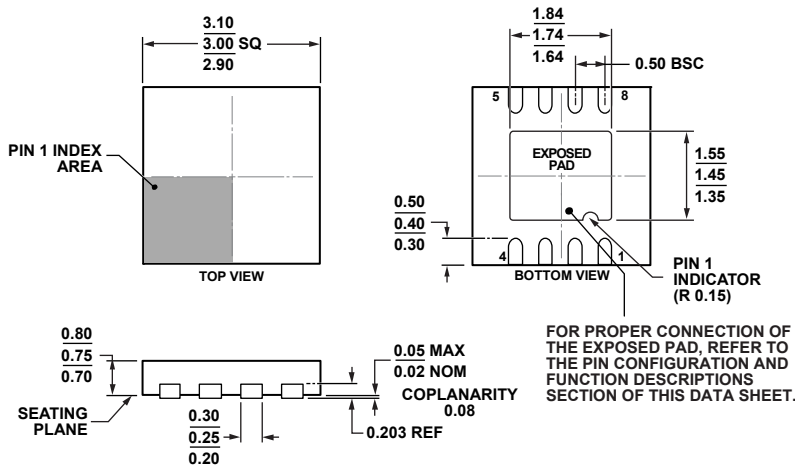

COMPLIANT TO JEDEC STANDARDS MO-229-WEED

Figure 44. 8-Lead Lead Frame Chip Scale Package [LFCSP_VD]
 3 mm x 3 mm and 0.75 mm Package Height
 (CP-8-13)

Dimensions shown in millimeters

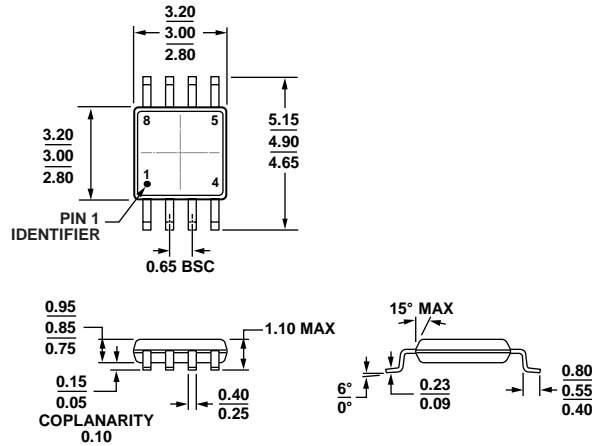


COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 45. 8-Lead Mini Small Outline Package [MSOP] (RM-8)

Dimensions shown in millimeters

10-07-2008-B

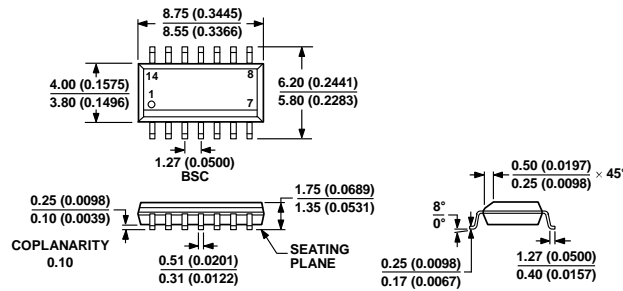


COMPLIANT TO JEDEC STANDARDS MS-012-AB
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 46. 14-Lead Small Outline Package [SOIC_N] Narrow Body (R-14)

Dimensions shown in millimeters and (inches)

061006-A

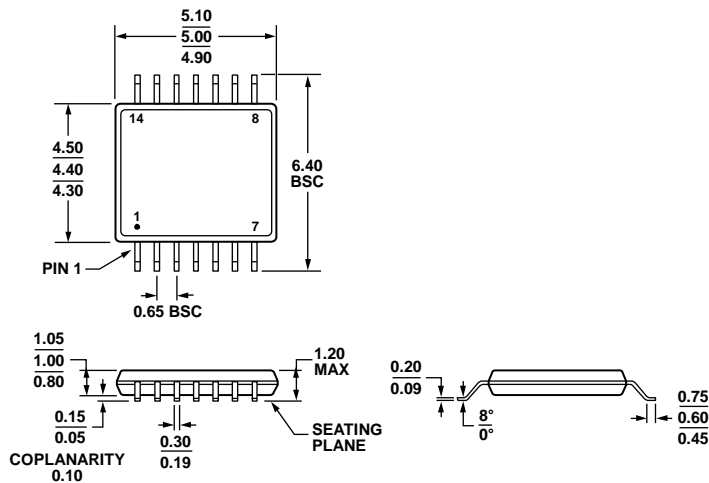

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 47. 14-Lead Thin Shrink Small Outline Package [TSSOP] (RU-14)

Dimensions shown in millimeters

061508-A

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Description | Package Option | Branding |
|--------------------|-------------------|---------------------|----------------|----------|
| AD8663ARZ | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8663ARZ-REEL | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8663ARZ-REEL7 | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8663ACPZ-R2 | -40°C to +125°C | 8-Lead LFCSP | CP-8-13 | A1U |
| AD8663ACPZ-REEL7 | -40°C to +125°C | 8-Lead LFCSP | CP-8-13 | A1U |
| AD8667ARZ | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8667ARZ-REEL | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8667ARZ-REEL7 | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| AD8667ARMZ | -40°C to +125°C | 8-Lead MSOP | RM-8 | A1E |
| AD8667ARMZ-REEL | -40°C to +125°C | 8-Lead MSOP | RM-8 | A1E |
| AD8669ARZ | -40°C to +125°C | 14-Lead SOIC_N | R-14 | |
| AD8669ARZ-REEL | -40°C to +125°C | 14-Lead SOIC_N | R-14 | |
| AD8669ARZ-REEL7 | -40°C to +125°C | 14-Lead SOIC_N | R-14 | |
| AD8669ARUZ | -40°C to +125°C | 14-Lead TSSOP | RU-14 | |
| AD8669ARUZ-REEL | -40°C to +125°C | 14-Lead TSSOP | RU-14 | |

¹ Z = RoHS Compliant Part.