

TYPES

1. Standard type

| Contact arrangement | Nominal coil voltage | Single side stable type | 2 coil latching type |
|---------------------|----------------------|-------------------------|----------------------|
|                     |                      | Part No.                | Part No.             |
| 1 Form C            | 1.5V DC              | DS1E-M-DC1.5V           | DS1E-ML2-DC1.5V      |
|                     | 3V DC                | DS1E-M-DC3V             | DS1E-ML2-DC3V        |
|                     | 5V DC                | DS1E-M-DC5V             | DS1E-ML2-DC5V        |
|                     | 6V DC                | DS1E-M-DC6V             | DS1E-ML2-DC6V        |
|                     | 9V DC                | DS1E-M-DC9V             | DS1E-ML2-DC9V        |
|                     | 12V DC               | DS1E-M-DC12V            | DS1E-ML2-DC12V       |
|                     | 24V DC               | DS1E-M-DC24V            | DS1E-ML2-DC24V       |
| 2 Form C            | 48V DC               | DS1E-M-DC48V            | DS1E-ML2-DC48V       |
|                     | 1.5V DC              | DS2E-M-DC1.5V           | DS2E-ML2-DC1.5V      |
|                     | 3V DC                | DS2E-M-DC3V             | DS2E-ML2-DC3V        |
|                     | 5V DC                | DS2E-M-DC5V             | DS2E-ML2-DC5V        |
|                     | 6V DC                | DS2E-M-DC6V             | DS2E-ML2-DC6V        |
|                     | 9V DC                | DS2E-M-DC9V             | DS2E-ML2-DC9V        |
|                     | 12V DC               | DS2E-M-DC12V            | DS2E-ML2-DC12V       |
| 4 Form C            | 24V DC               | DS2E-M-DC24V            | DS2E-ML2-DC24V       |
|                     | 48V DC               | DS2E-M-DC48V            | DS2E-ML2-DC48V       |
|                     | 1.5V DC              | DS4E-M-DC1.5V           | DS4E-ML2-DC1.5V      |
|                     | 3V DC                | DS4E-M-DC3V             | DS4E-ML2-DC3V        |
|                     | 5V DC                | DS4E-M-DC5V             | DS4E-ML2-DC5V        |
|                     | 6V DC                | DS4E-M-DC6V             | DS4E-ML2-DC6V        |
|                     | 9V DC                | DS4E-M-DC9V             | DS4E-ML2-DC9V        |
|                     | 12V DC               | DS4E-M-DC12V            | DS4E-ML2-DC12V       |
|                     | 24V DC               | DS4E-M-DC24V            | DS4E-ML2-DC24V       |
|                     | 48V DC               | DS4E-M-DC48V            | DS4E-ML2-DC48V       |

Standard packing: Tube: 50 pcs.; Case: 500 pcs.

2. High sensitivity type

| Contact arrangement | Nominal coil voltage | Single side stable type | 2 coil latching type |
|---------------------|----------------------|-------------------------|----------------------|
|                     |                      | Part No.                | Part No.             |
| 1 Form C            | 1.5V DC              | DS1E-S-DC1.5V           | DS1E-SL2-DC1.5V      |
|                     | 3V DC                | DS1E-S-DC3V             | DS1E-SL2-DC3V        |
|                     | 5V DC                | DS1E-S-DC5V             | DS1E-SL2-DC5V        |
|                     | 6V DC                | DS1E-S-DC6V             | DS1E-SL2-DC6V        |
|                     | 9V DC                | DS1E-S-DC9V             | DS1E-SL2-DC9V        |
|                     | 12V DC               | DS1E-S-DC12V            | DS1E-SL2-DC12V       |
|                     | 24V DC               | DS1E-S-DC24V            | DS1E-SL2-DC24V       |
| 2 Form C            | 48V DC               | DS1E-S-DC48V            | DS1E-SL2-DC48V       |
|                     | 1.5V DC              | DS2E-S-DC1.5V           | DS2E-SL2-DC1.5V      |
|                     | 3V DC                | DS2E-S-DC3V             | DS2E-SL2-DC3V        |
|                     | 5V DC                | DS2E-S-DC5V             | DS2E-SL2-DC5V        |
|                     | 6V DC                | DS2E-S-DC6V             | DS2E-SL2-DC6V        |
|                     | 9V DC                | DS2E-S-DC9V             | DS2E-SL2-DC9V        |
|                     | 12V DC               | DS2E-S-DC12V            | DS2E-SL2-DC12V       |
| 4 Form C            | 24V DC               | DS2E-S-DC24V            | DS2E-SL2-DC24V       |
|                     | 48V DC               | DS2E-S-DC48V            | DS2E-SL2-DC48V       |
|                     | 1.5V DC              | DS4E-S-DC1.5V           | DS4E-SL2-DC1.5V      |
|                     | 3V DC                | DS4E-S-DC3V             | DS4E-SL2-DC3V        |
|                     | 5V DC                | DS4E-S-DC5V             | DS4E-SL2-DC5V        |
|                     | 6V DC                | DS4E-S-DC6V             | DS4E-SL2-DC6V        |
|                     | 9V DC                | DS4E-S-DC9V             | DS4E-SL2-DC9V        |
|                     | 12V DC               | DS4E-S-DC12V            | DS4E-SL2-DC12V       |
|                     | 24V DC               | DS4E-S-DC24V            | DS4E-SL2-DC24V       |
|                     | 48V DC               | DS4E-S-DC48V            | DS4E-SL2-DC48V       |

Standard packing: Tube: 50 pcs.; Case: 500 pcs.

Notes: 1. 1 coil latching type are manufactured by lot upon receipt of order.

2. Reverse polarity types available (add suffix-R)

## RATING

### 1. Coil data

#### 1) Single side stable type

| Type                      | Nominal coil voltage | Pick-up voltage<br>(at 20°C 68°F)  | Drop-out voltage<br>(at 20°C 68°F)        | Nominal operating current [±10%]<br>(at 20°C 68°F) | Coil resistance [±10%]<br>(at 20°C 68°F) | Nominal operating power | Max. allowable voltage<br>(at 50°C 122°F)  |
|---------------------------|----------------------|--|---|--|--|-------------------------|--|
| Standard (M) type         | 1.5V DC              | 70%V or less of nominal voltage (Initial)  | 10%V or more of nominal voltage (Initial) | 266.7mA  | 5.63Ω                                    | 400mW                   | 1 Form C:<br>120%V of nominal voltage<br>2 Form C, 4 Form C:<br>150%V of nominal voltage |
|                           | 3V DC                |  |   | 133.3mA  | 22.5Ω                                    |                         |  |
|                           | 5V DC                |  |   | 80.0mA   | 62.5Ω                                    |                         |  |
|                           | 6V DC                |  |   | 66.7mA   | 90Ω                                      |                         |  |
|                           | 9V DC                |  |   | 44.4mA   | 203Ω                                     |                         |  |
|                           | 12V DC               |  |   | 33.3mA   | 360Ω                                     |                         |  |
|                           | 24V DC               |  |   | 16.7mA   | 1,440Ω                                   |                         |  |
|                           | 48V DC               |  |   | 8.3mA  | 5,760Ω                                   |                         |  |
| High sensitivity (S) type | 1.5V DC              | 1 Form C:<br>80%V or less of nominal voltage<br>2 Form C, 4 Form C:<br>70%V or less of nominal voltage (Initial) | 10%V or more of nominal voltage (Initial) | 133.3mA  | 11.3Ω                                    | 200mW                   | 1 Form C:<br>160%V of nominal voltage<br>2 Form C, 4 Form C:<br>200%V of nominal voltage |
|                           | 3V DC                |  |   | 66.7mA   | 45Ω                                      |                         |  |
|                           | 5V DC                |  |   | 40.0mA   | 125Ω                                     |                         |  |
|                           | 6V DC                |  |   | 33.3mA   | 180Ω                                     |                         |  |
|                           | 9V DC                |  |   | 22.2mA   | 405Ω                                     |                         |  |
|                           | 12V DC               |  |   | 16.7mA   | 720Ω                                     |                         |  |
|                           | 24V DC               |  |   | 8.3mA  | 2,880Ω                                   |                         |  |
|                           | 48V DC               |  |   | 4.2mA  | 11,520Ω                                  |                         |  |

#### 2) 2 coil latching type

| Type                      | Nominal coil voltage | Set voltage<br>(at 20°C 68°F)  | Reset voltage<br>(at 20°C 68°F)  | Nominal operating current [±10%]<br>(at 20°C 68°F) |            | Coil resistance [±10%]<br>(at 20°C 68°F) |            | Nominal operating power |            | Max. allowable voltage<br>(at 50°C 122°F)  |
|---------------------------|----------------------|--|--|--|------------|--|------------|-------------------------|------------|--|
|                           |                      |  |  | Set coil   | Reset coil | Set coil                                 | Reset coil | Set coil                | Reset coil |  |
| Standard (M) type         | 1.5V DC              | 70%V or less of nominal voltage (Initial)  | 70%V or less of nominal voltage (Initial)  | 240mA  | 240mA      | 6.25Ω                                    | 6.25Ω      | 360mW                   | 360mW      | 1 Form C:<br>120%V of nominal voltage<br>2 Form C, 4 Form C:<br>150%V of nominal voltage |
|                           | 3V DC                |  |  | 120mA  | 120mA      | 25Ω                                      | 25Ω        |                         |            |  |
|                           | 5V DC                |  |  | 72mA   | 72mA       | 69.4Ω                                    | 69.4Ω      |                         |            |  |
|                           | 6V DC                |  |  | 60mA   | 60mA       | 100Ω                                     | 100Ω       |                         |            |  |
|                           | 9V DC                |  |  | 40mA   | 40mA       | 225Ω                                     | 225Ω       |                         |            |  |
|                           | 12V DC               |  |  | 30mA   | 30mA       | 400Ω                                     | 400Ω       |                         |            |  |
|                           | 24V DC               |  |  | 15mA   | 15mA       | 1,600Ω                                   | 1,600Ω     |                         |            |  |
|                           | 48V DC               |  |  | 7.5mA  | 7.5mA      | 6,400Ω                                   | 6,400Ω     |                         |            |  |
| High sensitivity (S) type | 1.5V DC              | 1 Form C:<br>80%V or less of nominal voltage<br>2 Form C, 4 Form C:<br>70%V or less of nominal voltage (Initial) | 1 Form C:<br>80%V or less of nominal voltage<br>2 Form C, 4 Form C:<br>70%V or less of nominal voltage (Initial) | 120mA  | 120mA      | 12.5Ω                                    | 12.5Ω      | 180mW                   | 180mW      | 1 Form C:<br>160%V of nominal voltage<br>2 Form C, 4 Form C:<br>200%V of nominal voltage |
|                           | 3V DC                |  |  | 60mA   | 60mA       | 50Ω                                      | 50Ω        |                         |            |  |
|                           | 5V DC                |  |  | 36mA   | 36mA       | 139Ω                                     | 139Ω       |                         |            |  |
|                           | 6V DC                |  |  | 30mA   | 30mA       | 200Ω                                     | 200Ω       |                         |            |  |
|                           | 9V DC                |  |  | 20mA   | 20mA       | 450Ω                                     | 450Ω       |                         |            |  |
|                           | 12V DC               |  |  | 15mA   | 15mA       | 800Ω                                     | 800Ω       |                         |            |  |
|                           | 24V DC               |  |  | 7.5mA  | 7.5mA      | 3,200Ω                                   | 3,200Ω     |                         |            |  |
|                           | 48V DC               |  |  | 3.75mA   | 3.75mA     | 12,800Ω                                  | 12,800Ω    |                         |            |  |


2. Specifications

| Characteristics            | Item  |                          | Specifications  |                           |                           |
|----------------------------|---|--------------------------|---|---------------------------|---------------------------|
| Contact                    | Arrangement                                       |                          | 1 Form C  | 2 Form C                  | 4 Form C                  |
|                            | Initial contact resistance, max.                  |                          | Max. 50 mΩ (By voltage drop 6 V DC 1A)  |                           |                           |
|                            | Contact material                                  |                          | Ag+Au clad  |                           |                           |
| Rating                     | Nominal switching capacity (resistive load)       |                          | 2 A 30 V DC   |                           |                           |
|                            | Max. switching power (resistive load)             |                          | 60 W, 125 VA  |                           |                           |
|                            | Max. switching voltage                            |                          | 220 V DC, 250 V AC  |                           |                           |
|                            | Max. carrying current                             |                          | 3 A   |                           |                           |
|                            | Min. switching capacity (Reference value)*1       |                          | 10μA 10m V DC   |                           |                           |
|                            | Nominal operating power                           |                          | Single side stable (M type: 400 mW, S type: 200 mW);<br>latching (M type: 360 mW, S type: 180 mW)                               |                           |                           |
| Electrical characteristics | Insulation resistance (Initial)                   |                          | Min. 100MΩ (at 500V DC)<br>Measurement at same location as "Initial breakdown voltage" section.                                 |                           |                           |
|                            | Breakdown voltage (Initial)                       | Between open contacts    | 1,000 Vrms for 1min.<br>(500 Vrms for 1min: 1 Form C high sensitivity type) (Detection current: 10mA.)                          |                           |                           |
|                            |   | Between contact and coil | 1,500 Vrms for 1min.<br>(1,000 Vrms for 1min: 1 Form C high sensitivity type) (Detection current: 10mA.)                        |                           |                           |
|                            | Temperature rise                                  |                          | Max. 65°C<br>(By resistive method, nominal voltage applied to the coil, contact carrying current: 2A.)                          |                           |                           |
|                            | Operate time [Set time] (at 20°C 68°F)            |                          | Max. 10 ms [10 ms] (Nominal voltage applied to the coil, excluding contact bounce time.)  |                           |                           |
|                            | Release time [Reset time] (at 20°C 68°F)          |                          | Max. 5 ms [10 ms] (Nominal voltage applied to the coil, excluding contact bounce time.)<br>(without diode)                      |                           |                           |
| Mechanical characteristics | Shock resistance                                  | Functional*2             | Min. 490 m/s <sup>2</sup>   | Min. 490 m/s <sup>2</sup> | Min. 294 m/s <sup>2</sup> |
|                            |   | Destructive              | Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)   |                           |                           |
|                            | Vibration resistance                              | Functional               | 10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.)   |                           |                           |
|                            |   | Destructive              | 10 to 55 Hz at double amplitude of 5 mm   |                           |                           |
| Expected life              | Mechanical  |                          | Min. 10 <sup>8</sup> (10 <sup>7</sup> : 1 Form C latching type) (at 600 cpm)  |                           |                           |
|                            | Electrical  |                          | Min. 5×10 <sup>5</sup> rated load (at 60 cpm)   |                           |                           |
| Conditions                 | Conditions for operation, transport and storage*3 |                          | Ambient temperature: -40°C to +70°C -40°F to +158°F<br>Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) |                           |                           |
|                            | Max. operating speed (at rated load)              |                          | 60 cpm  |                           |                           |
| Unit weight                |   |                          | Approx. 3 g .11 oz  | Approx. 4g .14oz          | Approx. 7g .25oz          |


Notes: \*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.  
(SX relays are available for low level load switching [10V DC, 10mA max. level])  
\*2 Half-wave pulse of sine wave: 11 ms; detection time: 10μs  
\*3 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT.

REFERENCE DATA


1. Maximum switching capacity

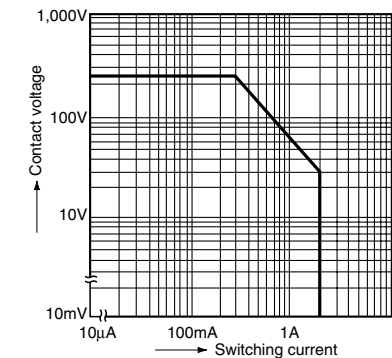

2. Life curve (Resistive load)

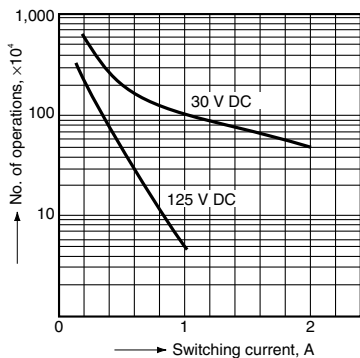

3. Contact reliability for AC loads  
Tested sample: DS2E-M-DC24V 10 pcs.  
Operating speed: 20 cpm.  
Detection level: 200 mΩ

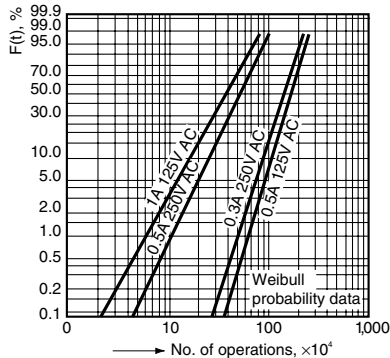


4-(1). Coil temperature rise  
(2 Form C single side stable type)

Tested sample: DS2E-M-DC12V

Point measured: Inside the coil

Ambient temperature: 18° to 19°C 64° to 66°F

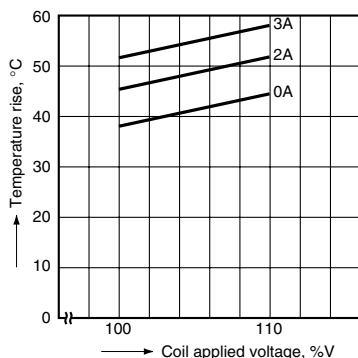


4-(2). Coil temperature rise  
(4 Form C single side stable type)

Tested sample: DS4E-M-DC12V

Point measured: Inside the coil

Ambient temperature: 17° to 18°C 63° to 64°F

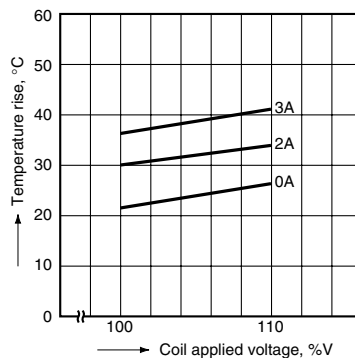


4-(3). Coil temperature rise  
(2 Form C 2 coil latching type)

Tested sample: DS2E-ML2-DC12V

Point measured: Inside the coil

Ambient temperature: 20° to 21°C 68° to 70°F

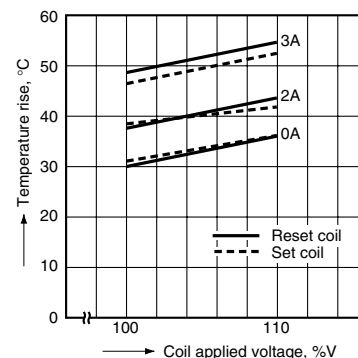


4-(4). Coil temperature rise  
(4 Form C 2 coil latching type)

Tested sample: DS4E-ML2-DC12V


Point measured: Inside the coil

Ambient temperature: 20°C 68°F

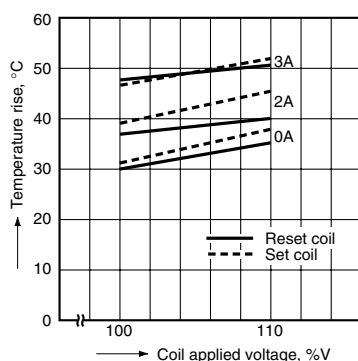


5. Operate and release time characteristics  
(2 Form C single side stable type)


Test condition: Without diode connected to coil in parallel

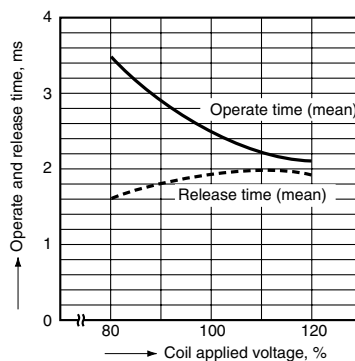



6-(1). Influence of adjacent mounting  
(1 Form C)

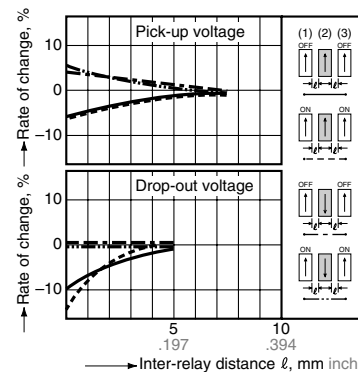

6-(2). Influence of adjacent mounting  
(2 Form C)

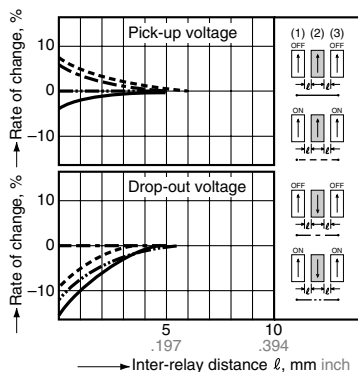

6-(3). Influence of adjacent mounting  
(4 Form C)

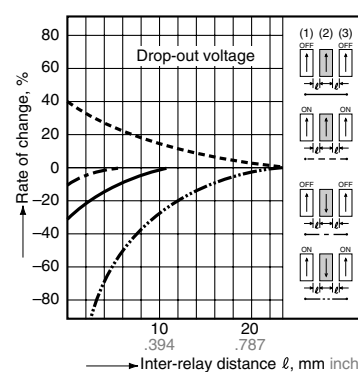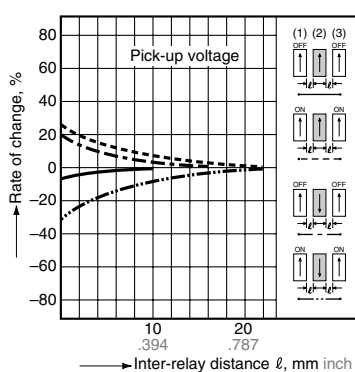


DIMENSIONS (Unit: mm inch)

DS (1 Form C)

Single side stable, 2 coil latching

External dimensions

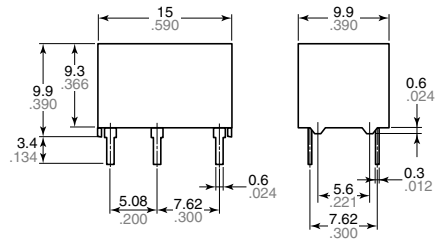


General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)

Single side stable

2 coil latching

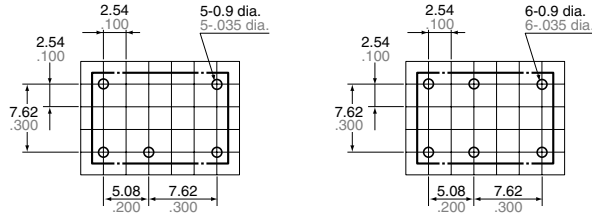

Schematic (Bottom view)

Single side stable

2 coil latching



(Deenergized condition)

(Reset condition)


Note: External dimensions of 1 coil latching types are same as single side stable type.

Tolerance:  $\pm 0.1 \pm .004$

DS (2 Form C)


Single side stable

External dimensions

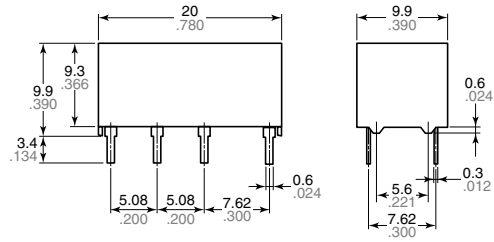


General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)



Schematic (Bottom view)



(Deenergized condition)


Note: External dimensions of 1 coil latching types are same as single side stable type.

Tolerance:  $\pm 0.1 \pm .004$

DS (2 Form C)


2 coil latching

External dimensions

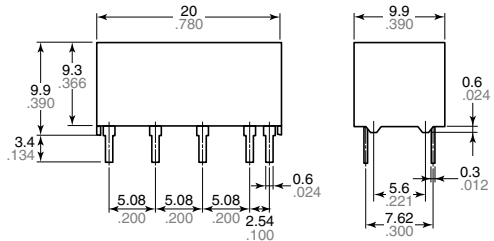


General tolerance:  $\pm 0.3 \pm .012$

PC board pattern (Bottom view)






Schematic (Bottom view)






(Reset condition)

Tolerance:  $\pm 0.1 \pm .004$

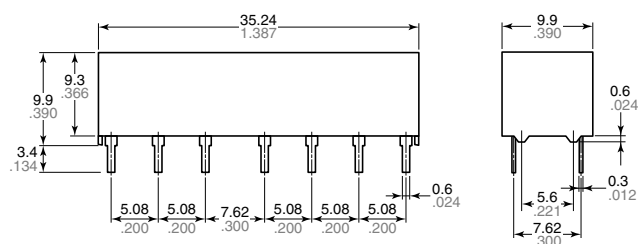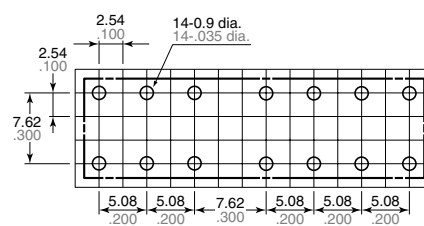**DS (4 Form C)****Single side stable****External dimensions**General tolerance:  $\pm 0.3 \pm 0.012$ **PC board pattern (Bottom view)****Schematic (Bottom view)**

(Deenergized condition)

Note: External dimensions of 1 coil latching types are same as single side stable type.

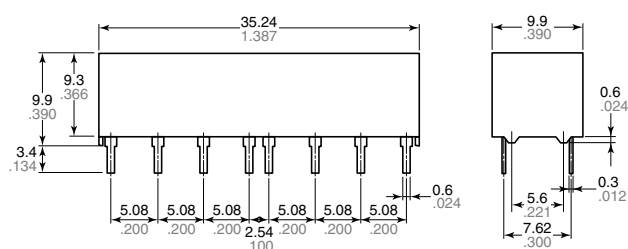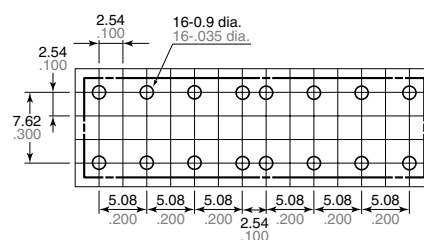Tolerance:  $\pm 0.1 \pm 0.004$ **DS (4 Form C)****2 coil latching****External dimensions**General tolerance:  $\pm 0.3 \pm 0.012$ **PC board pattern (Bottom view)****Schematic (Bottom view)**

(Reset condition)

Tolerance:  $\pm 0.1 \pm 0.004$ **NOTES****1. Coil connection**

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

**2. External magnetic field**

Since DS relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

**For Cautions for Use, see Relay Technical Information.**