


Applications

- Security and Surveillance

Product Features

- high sensitivity for low-light operation
- ultra low power and low cost
- automatic image control functions:
 - automatic exposure control (AEC)
 - automatic gain control (AGC)
 - automatic white balance (AWB)
 - automatic band filter (ABF)
 - automatic black level calibration (ABLC)
- programmable controls: frame rate, AEC/AGC 16-zone size/position/weight control, mirror, flip and windowing
- image quality controls: lens correction and defective pixel canceling
- output support for raw RGB
- on-chip phase lock loop (PLL)
- support for horizontal and vertical sub-sampling
- supports image sizes:
 - WXGA (1280x800) at 30 fps
 - 640x400 (sub-sampled WXGA) at 60 fps
 - HD 720p (1280x720) at 30 fps
- support for black sun cancellation
- standard serial camera control bus (SCCB) interface
- digital video port (DVP) parallel output interface
- embedded one-time programmable (OTP) memory
- built-in 1.5 V regulator for core

OV9715




Ordering Information

- OV09715-V28A
(color, lead-free, 28-pin CSP2)

Product Specifications

- active array size: 1280 x 800
- power supply:
 - core: 1.5 VDC $\pm 5\%$ (built-in regulator)
 - analog: 3.0 - 3.6V
 - I/O: 1.7 - 3.6V
- power requirements:
 - active: 110 mW
 - standby: 50 μ A
- temperature range:
 - operating: -30°C to 85°C junction temperature
 - stable image: 10°C to 60°C junction temperature
- output formats: 10-bit raw RGB data
- lens size: 1/4"
- lens chief ray angle: 0°
- input clock frequency: 6 - 27 MHz
- scan mode: progressive
- maximum image transfer rate:
 - WXGA (1280x800): 30 fps
 - 640x400: 60 fps
- sensitivity: 3300 mV/lux-sec
- max S/N ratio: 39 dB
- dynamic range: 69 dB @ 8x gain
- maximum exposure interval: 826 x t_{row}
- pixel size: 3 μ m x 3 μ m
- dark current: 20 mV/s @ 60°C junction temperature
- image area: 3888 μ m x 2430 μ m
- package dimensions: 5415 μ m x 4415 μ m

Functional Block Diagram

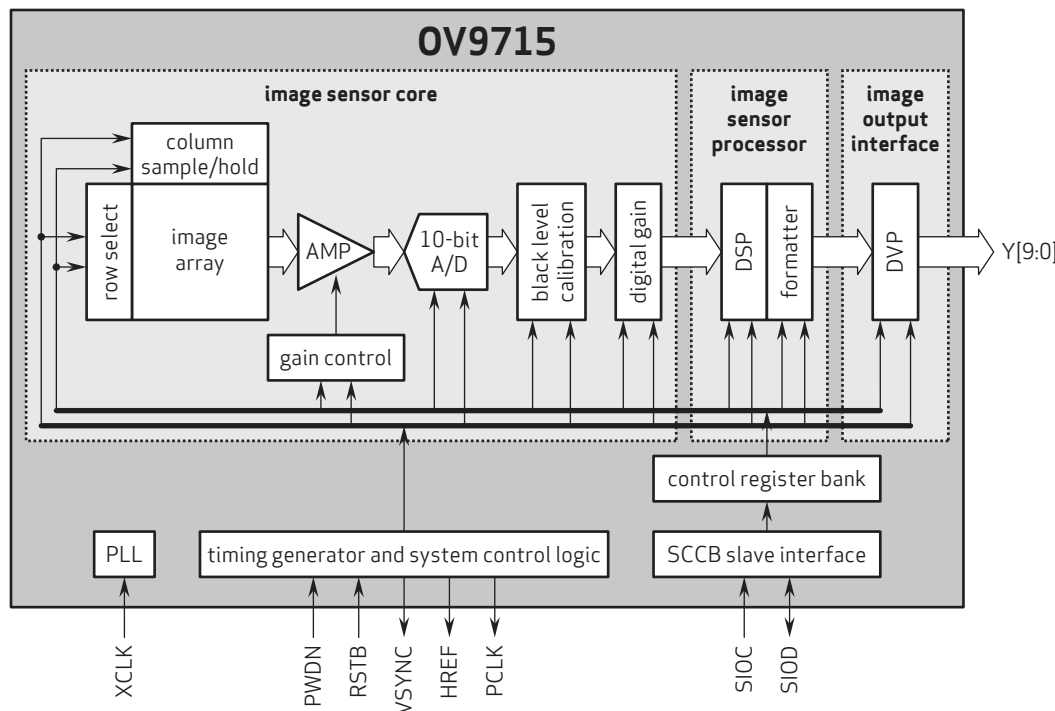

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniPixel3-HS is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision

Version 1.5, November, 2012