

# Pxxx0SxL

## SIDACtor® Series DO-214AA

### Electrical Parameters (continued)

| Part Number | Marking | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_S$<br>@ $100V/\mu s$ | $I_H$  | $I_S$  | $I_T$ | $V_T$<br>@ $I_T=2.2$ Amps | Capacitance<br>@ 1MHz, 2V bias |        |
|-------------|---------|---------------------------------|-------------------------|--------|--------|-------|---------------------------|--------------------------------|--------|
|             |         | V min                           | V max                   | mA min | mA max | A max | V max                     | pF min                         | pF max |
| P0080SBLRP  | P-8B    | 6                               | 25                      | 50     | 800    | 2.2   | 4                         | 20                             | 50     |
| P0220SBLRP  | P22B    | 15                              | 32                      | 50     | 800    | 2.2   | 4                         | 20                             | 50     |
| P0300SBLRP  | P03B    | 25                              | 40                      | 50     | 800    | 2.2   | 4                         | 15                             | 50     |
| P0640SBLRP  | P06B    | 58                              | 77                      | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P0720SBLRP  | P07B    | 65                              | 88                      | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P0900SBLRP  | P09B    | 75                              | 98                      | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P1100SBLRP  | P11B    | 90                              | 130                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P1200SBLRP  | P12B    | 100                             | 130                     | 120    | 800    | 2.2   | 4                         | 20                             | 50     |
| P1300SBLRP  | P13B    | 120                             | 160                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P1500SBLRP  | P15B    | 140                             | 180                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P1800SBLRP  | P18B    | 170                             | 220                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P2000SBLRP  | P20B    | 180                             | 220                     | 120    | 800    | 2.2   | 4                         | 20                             | 50     |
| P2100SBLRP  | P21B    | 180                             | 240                     | 150    | 800    | 2.2   | 4                         | 20                             | 35     |
| P2300SBLRP  | P23B    | 190                             | 260                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P2500SBLRP  | P25B    | 230                             | 290                     | 120    | 800    | 2.2   | 4                         | 20                             | 50     |
| P2600SBLRP  | P26B    | 220                             | 300                     | 150    | 800    | 2.2   | 4                         | 20                             | 35     |
| P3100SBLRP  | P31B    | 275                             | 350                     | 150    | 800    | 2.2   | 4                         | 20                             | 35     |
| P3500SBLRP  | P35B    | 320                             | 400                     | 150    | 800    | 2.2   | 4                         | 20                             | 35     |
| P4500SBLRP  | P45B    | 400                             | 530                     | 150    | 800    | 2.2   | 4                         | 20                             | 50     |
| P0080SCLRP  | P-8C    | 6                               | 25                      | 50     | 800    | 2.2   | 4                         | 25                             | 70     |
| P0220SCLRP  | P22C    | 15                              | 32                      | 50     | 800    | 2.2   | 4                         | 25                             | 70     |
| P0300SCLRP  | P03C    | 25                              | 40                      | 50     | 800    | 2.2   | 4                         | 20                             | 50     |
| P0640SCLRP  | P06C    | 58                              | 77                      | 150    | 800    | 2.2   | 4                         | 45                             | 100    |
| P0720SCLRP  | P07C    | 65                              | 88                      | 150    | 800    | 2.2   | 4                         | 45                             | 100    |
| P0900SCLRP  | P09C    | 75                              | 98                      | 150    | 800    | 2.2   | 4                         | 45                             | 100    |
| P1100SCLRP  | P11C    | 90                              | 130                     | 150    | 800    | 2.2   | 4                         | 45                             | 90     |
| P1200SCLRP  | P12C    | 100                             | 130                     | 120    | 800    | 2.2   | 4                         | 20                             | 35     |
| P1300SCLRP  | P13C    | 120                             | 160                     | 150    | 800    | 2.2   | 4                         | 40                             | 85     |
| P1500SCLRP  | P15C    | 140                             | 180                     | 150    | 800    | 2.2   | 4                         | 25                             | 70     |
| P1800SCLRP  | P18C    | 170                             | 220                     | 150    | 800    | 2.2   | 4                         | 25                             | 70     |
| P2000SCLRP  | P20C    | 180                             | 220                     | 120    | 800    | 2.2   | 4                         | 25                             | 35     |
| P2100SCLRP  | P21C    | 180                             | 240                     | 150    | 800    | 2.2   | 4                         | 25                             | 70     |
| P2300SCLRP  | P23C    | 190                             | 260                     | 150    | 800    | 2.2   | 4                         | 25                             | 70     |
| P2500SCLRP  | P25C    | 230                             | 290                     | 120    | 800    | 2.2   | 4                         | 30                             | 70     |
| P2600SCLRP  | P26C    | 220                             | 300                     | 150    | 800    | 2.2   | 4                         | 30                             | 70     |
| P3100SCLRP  | P31C    | 275                             | 350                     | 150    | 800    | 2.2   | 4                         | 30                             | 70     |
| P3500SCLRP  | P35C    | 320                             | 400                     | 150    | 800    | 2.2   | 4                         | 25                             | 65     |
| P4500SCLRP  | P45C    | 400                             | 530                     | 150    | 800    | 2.2   | 4                         | 25                             | 65     |

#### Notes:

- Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).
- Components are bi-directional.

### Surge Ratings

| Series | $I_{PP}$                                     |                                        |                                          |                                            |                                            |                                          |                                            |                                              |                                           | $I_{TSM}$<br>50/60 Hz | di/dt             |
|--------|----------------------------------------------|----------------------------------------|------------------------------------------|--------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|----------------------------------------------|-------------------------------------------|-----------------------|-------------------|
|        | 0.2/310 <sup>1</sup><br>0.5/700 <sup>2</sup> | 2/10 <sup>1</sup><br>2/10 <sup>2</sup> | 8/20 <sup>1</sup><br>1.2/50 <sup>2</sup> | 10/160 <sup>1</sup><br>10/160 <sup>2</sup> | 10/560 <sup>1</sup><br>10/560 <sup>2</sup> | 5/320 <sup>1</sup><br>9/720 <sup>2</sup> | 10/360 <sup>1</sup><br>10/360 <sup>2</sup> | 10/1000 <sup>1</sup><br>10/1000 <sup>2</sup> | 5/310 <sup>1</sup><br>10/700 <sup>2</sup> |                       |                   |
|        | A min                                        | A min                                  | A min                                    | A min                                      | A min                                      | A min                                    | A min                                      | A min                                        | A min                                     |                       | Amps/ $\mu s$ max |
| A      | 20                                           | 150                                    | 150                                      | 90                                         | 50                                         | 75                                       | 75                                         | 45                                           | 75                                        | 25                    | 500               |
| B      | 25                                           | 250                                    | 250                                      | 150                                        | 100                                        | 100                                      | 125                                        | 80                                           | 100                                       | 30                    | 500               |
| C      | 50                                           | 500                                    | 400                                      | 200                                        | 150                                        | 200                                      | 175                                        | 100                                          | 200                                       | 35                    | 500               |

#### Notes:

1. Current waveform in  $\mu s$
  2. Voltage waveform in  $\mu s$
- Peak pulse current rating ( $I_{PP}$ ) is repetitive and guaranteed for the life of the product.

- $I_{PP}$  ratings applicable over temperature range of  $-40^\circ C$  to  $+85^\circ C$
- The component must initially be in thermal equilibrium with  $-40^\circ C \leq T_J \leq +150^\circ C$


# Pxxx0SxL

## SIDACtor® Series DO-214AA


### Thermal Considerations

| Package                                                                           | Symbol          | Parameter                               | Value       | Unit |
|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------|-------------|------|
|  | $T_J$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|                                                                                   | $T_S$           | Storage Temperature Range               | -65 to +150 | °C   |
|                                                                                   | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 90          | °C/W |


#### V-I Characteristics

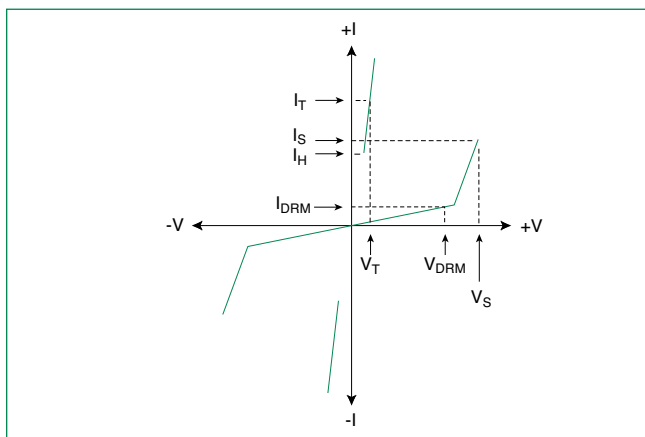


#### $t_r \times t_d$ Pulse Waveform

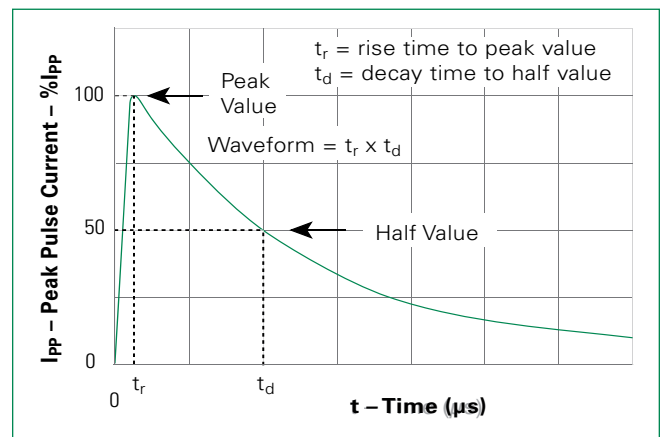

#### Normalized $V_S$ Change vs. Junction Temperature

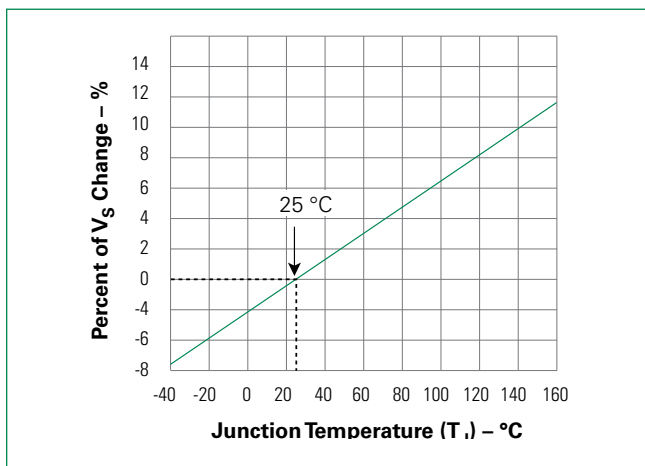

#### Normalized DC Holding Current vs. Case Temperature

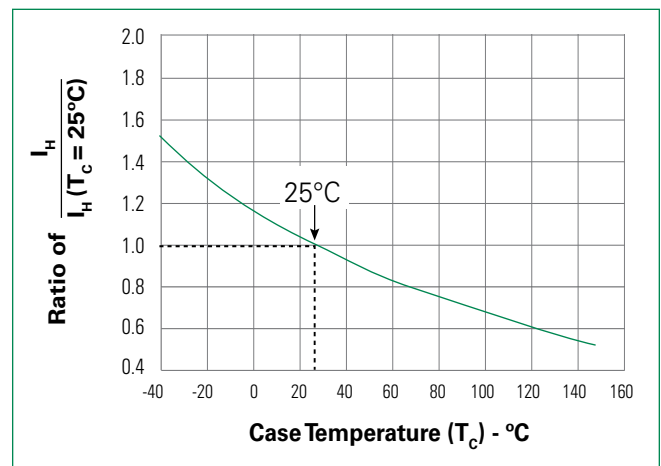


# Pxxx0SxL

## SIDACtor® Series DO-214AA

### Soldering Parameters

|                                                                        |                                    |                  |
|------------------------------------------------------------------------|------------------------------------|------------------|
| <b>Reflow Condition</b>                                                |                                    | Pb-Free assembly |
| <b>Pre Heat</b>                                                        | - Temperature Min ( $T_{s(min)}$ ) | +150°C           |
|                                                                        | - Temperature Max ( $T_{s(max)}$ ) | +200°C           |
|                                                                        | - Time (Min to Max) ( $t_s$ )      | 60-180 secs.     |
| <b>Average ramp up rate (Liquidus Temp (<math>T_L</math>) to peak)</b> |                                    | 3°C/sec. Max.    |
| <b><math>T_{s(max)}</math> to <math>T_L</math> - Ramp-up Rate</b>      |                                    | 3°C/sec. Max.    |
| <b>Reflow</b>                                                          | - Temperature ( $T_L$ ) (Liquidus) | +217°C           |
|                                                                        | - Temperature ( $t_L$ )            | 60-150 secs.     |
| <b>Peak Temp (<math>T_p</math>)</b>                                    |                                    | +260(+0/-5)°C    |
| <b>Time within 5°C of actual Peak Temp (<math>t_p</math>)</b>          |                                    | 30 secs. Max.    |
| <b>Ramp-down Rate</b>                                                  |                                    | 6°C/sec. Max.    |
| <b>Time 25°C to Peak Temp (<math>T_p</math>)</b>                       |                                    | 8 min. Max.      |
| <b>Do not exceed</b>                                                   |                                    | +260°C           |

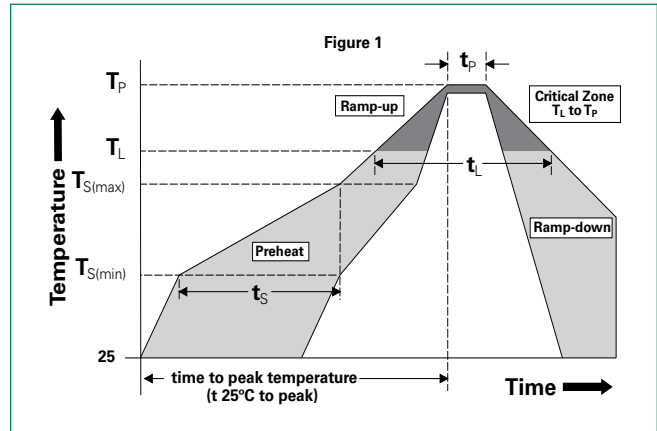


### Physical Specifications

|                        |                                                             |
|------------------------|-------------------------------------------------------------|
| <b>Lead Material</b>   | Copper Alloy                                                |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated                                       |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification V-0 |


### Environmental Specifications

|                                         |                                                                                                                       |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>High Temp Voltage Blocking</b>       | 80% Rated $V_{DRM}$ ( $V_{AC}$ Peak) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>                     | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A-104                |
| <b>Biased Temp &amp; Humidity</b>       | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101                                                |
| <b>High Temp Storage</b>                | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101                                                        |
| <b>Low Temp Storage</b>                 | -65°C, 1008 hrs.                                                                                                      |
| <b>Thermal Shock</b>                    | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106               |
| <b>Autoclave (Pressure Cooker Test)</b> | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102                                                       |
| <b>Resistance to Solder Heat</b>        | +260°C, 30 secs. MIL-STD-750 (Method 2031)                                                                            |
| <b>Moisture Sensitivity Level</b>       | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1                                       |

### Part Numbering

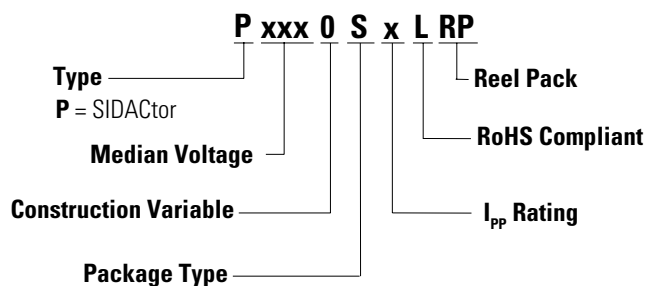


### Part Marking

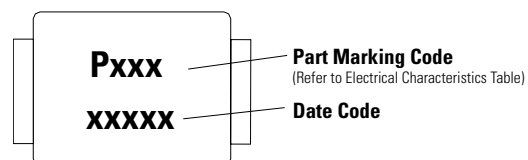

# Pxxx0SxL

## SIDACtor® Series DO-214AA

### Dimensions — DO-214AA

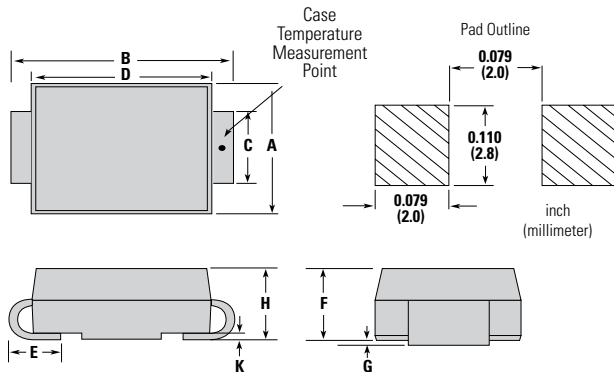


| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| <b>A</b>   | 0.130  | 0.156 | 3.30        | 3.95 |
| <b>B</b>   | 0.201  | 0.220 | 5.10        | 5.60 |
| <b>C</b>   | 0.077  | 0.087 | 1.95        | 2.20 |
| <b>D</b>   | 0.159  | 0.181 | 4.05        | 4.60 |
| <b>E</b>   | 0.030  | 0.063 | 0.75        | 1.60 |
| <b>F</b>   | 0.075  | 0.096 | 1.90        | 2.45 |
| <b>G</b>   | 0.002  | 0.008 | 0.05        | 0.20 |
| <b>H</b>   | 0.077  | 0.104 | 1.95        | 2.65 |
| <b>K</b>   | 0.006  | 0.016 | 0.15        | 0.41 |

### Packing Options

| Package Type | Description               | Quantity | Added Suffix | Industry Standard |
|--------------|---------------------------|----------|--------------|-------------------|
| S            | DO-214AA Tape & Reel Pack | 2500     | RP           | EIA-481-D         |

### Tape and Reel Specification — DO-214AA

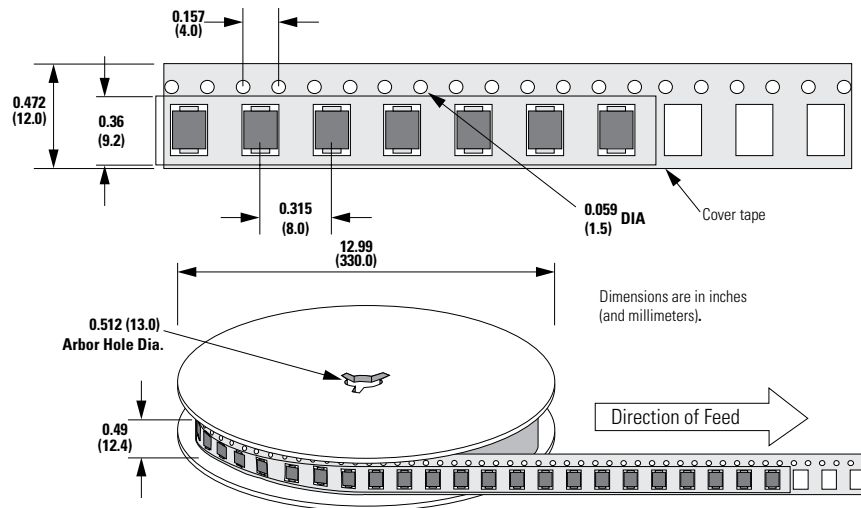

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics)