


280358 Product Details

Share Print Email

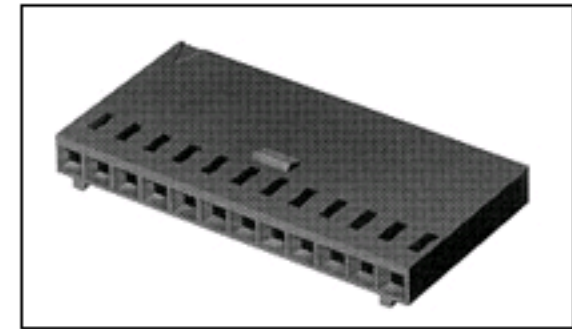

280358

TE Internal Number: 280358  
Active

View 3D PDF

.100 AMPMODU Headers, Housings & Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Connector
- Housing
- Connector Style = Receptacle
- Contact Type = Socket
- 2.54 mm Centerline

View all Features

Quick Links

- Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Feedback

| Documentation & Additional Information   |  |
|--|--|
| <p><b>Product Drawings:</b></p> <ul style="list-style-type: none"><li>AMPMODU II rec.HSG. single row, crimp on-snap in (PDF, English)</li></ul> <p><b>Catalog Pages/Data Sheets:</b></p> <ul style="list-style-type: none"><li>None Available</li></ul> <p><b>Product Specifications:</b></p> <ul style="list-style-type: none"><li>None Available</li></ul> <p><b>Application Specifications:</b></p> <ul style="list-style-type: none"><li>None Available</li></ul> <p><b>Instruction Sheets:</b></p> <ul style="list-style-type: none"><li>None Available</li></ul> <p><b>CAD Files:</b> (CAD Format &amp; Compression Information)</p> <ul style="list-style-type: none"><li>2D Drawing (DXF, Version Y)</li><li>3D Model (IGES, Version Y)</li><li>3D Model (STEP, Version Y)</li></ul> | <p><b>Additional Information:</b></p> <ul style="list-style-type: none"><li>Product Line Information</li></ul> <p><b>Related Products:</b></p> <ul style="list-style-type: none"><li>Tooling</li></ul> |
| List all Documents   |  |

| Product Features (Please use the Product Drawing for all design activity)  |   |
|--|---|
| <p><b>Product Type Features:</b></p> <ul style="list-style-type: none"><li>Product Type = Connector</li><li>Connector Type = Housing</li><li>Termination Method to Wire/Cable = Crimp</li><li>Mating Connector Lock = With</li><li>Connector Series = Mod II (Italian Range)</li><li>Keyed = No</li><li>Mating Connector Lock Type = Detent Latching</li></ul> <p><b>Body Features:</b></p> <ul style="list-style-type: none"><li>Row-to-Row Spacing (mm [in]) = 2.54 [0.100]</li></ul> <p><b>Contact Features:</b></p> <ul style="list-style-type: none"><li>Contact Type = Socket</li></ul> <p><b>Housing Features:</b></p> <ul style="list-style-type: none"><li>Connector Style = Receptacle</li><li>Centerline (mm [in]) = 2.54 [0.100]</li><li>Mating Alignment = With</li><li>Mating Alignment Type = Latched</li><li>Housing Color = Black</li><li>UL Flammability Rating = UL 94V-1</li><li>Housing Material = Thermoplastic - GF</li></ul> | <p><b>Configuration Features:</b></p> <ul style="list-style-type: none"><li>Number of Positions = 2</li><li>Number of Rows = 1</li><li>Housing Configuration = Both Ends Closed</li></ul> <p><b>Industry Standards:</b></p> <ul style="list-style-type: none"><li>RoHS/ELV Compliance = RoHS compliant, ELV compliant</li><li>Lead Free Solder Processes = Not relevant for lead free process</li><li>RoHS/ELV Compliance History = Always was RoHS compliant</li></ul> <p><b>Packaging Features:</b></p> <ul style="list-style-type: none"><li>Packaging Quantity = 1,000</li></ul> <p><b>Other:</b></p> <ul style="list-style-type: none"><li>Brand = AMP</li></ul> |

Corporate Information

About TE  
Investors  
News Room  
Supplier Portal  
Careers  
Terms & Conditions  
Privacy Policy

Quick Links

Distributor Inventory  
Product Cross Reference  
Documents & Drawings  
Product Compliance Support Center  
Site Map

Customer Support

Email or Chat With Us  
Find a Phone Number  
Knowledge Base  
Manage Your Account

Keep Me Informed

