


Fast Diode				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				600	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				600	V
I_R	reverse current, drain current	$V_R = 600\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_R = 600\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			0.5	mA
V_F	forward voltage drop	$I_F = 15\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			2.04	V
		$I_F = 30\text{ A}$				2.25	V
		$I_F = 15\text{ A}$	$T_{VJ} = 150^{\circ}\text{C}$			1.35	V
		$I_F = 30\text{ A}$				1.59	V
I_{FAV}	average forward current	$T_C = 140^{\circ}\text{C}$ rectangular	$T_{VJ} = 175^{\circ}\text{C}$ d = 0.5			15	A
V_{F0}	threshold voltage	} for power loss calculation only		$T_{VJ} = 175^{\circ}\text{C}$		0.99	V
r_F	slope resistance					15	m Ω
R_{thJC}	thermal resistance junction to case					1.6	K/W
R_{thCH}	thermal resistance case to heatsink				0.50		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				95	W
I_{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; $V_R = 0\text{ V}$		$T_{VJ} = 45^{\circ}\text{C}$		110	A
C_J	junction capacitance	$V_R = 400\text{ V}$ f = 1 MHz		$T_{VJ} = 25^{\circ}\text{C}$	12		pF
I_{RM}	max. reverse recovery current	} $I_F = 15\text{ A}; V_R = 300\text{ V}$ -di _F /dt = 200 A/ μs		$T_{VJ} = 25^{\circ}\text{C}$	5		A
				$T_{VJ} = 100^{\circ}\text{C}$	7		A
t_{rr}	reverse recovery time			$T_{VJ} = 25^{\circ}\text{C}$	35		ns
				$T_{VJ} = 100^{\circ}\text{C}$	95		ns

Package TO-220			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				2		g
M_D	mounting torque		0.4		0.6	Nm
F_C	mounting force with clip		20		60	N

Product Marking

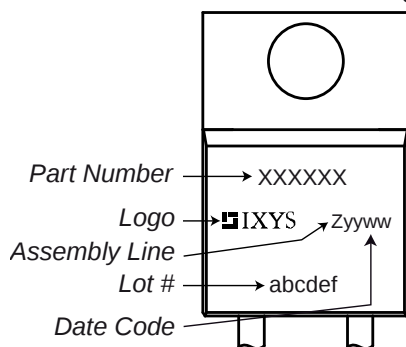


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP15-06A	DSEP15-06A	Tube	50	473529


Similar Part	Package	Voltage class
DSEP15-06B	TO-220AC (2)	600
DSEP15-06AS	TO-263AB (D2Pak) (2)	600
DSEP15-06BS	TO-263AB (D2Pak) (2)	600

Equivalent Circuits for Simulation


* on die level

$T_{VJ} = 175\text{ °C}$

			Fast Diode
$V_{0\text{ max}}$	threshold voltage	0.99	V
$R_{0\text{ max}}$	slope resistance *	12	mΩ

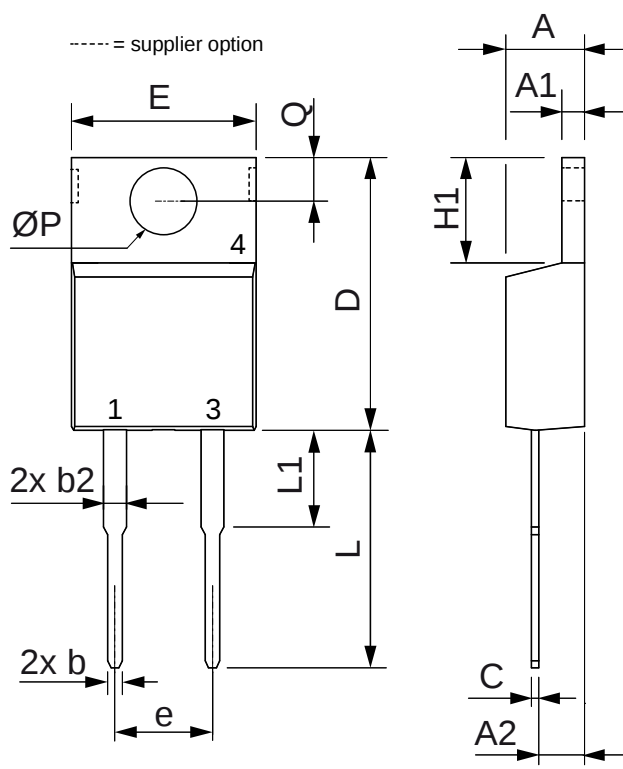Outlines TO-220


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08	BSC	0.200	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125



Fast Diode

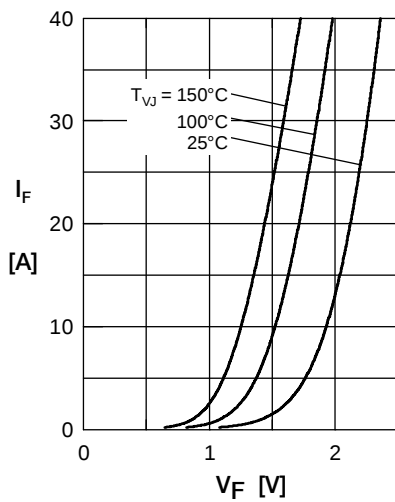


Fig. 1 Forward current I_F versus V_F

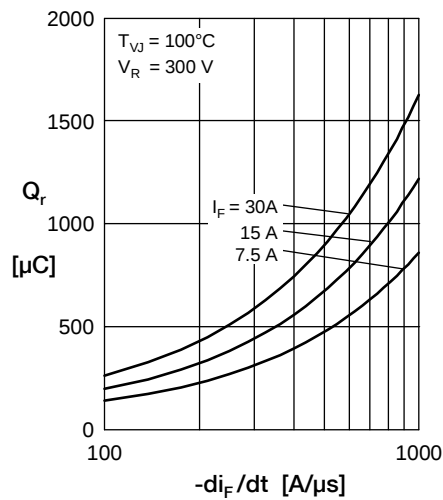


Fig. 2 Typ. reverse recov. charge Q_r versus $-di_F/dt$

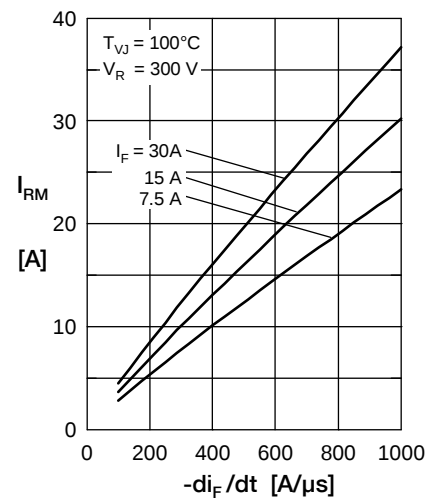


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

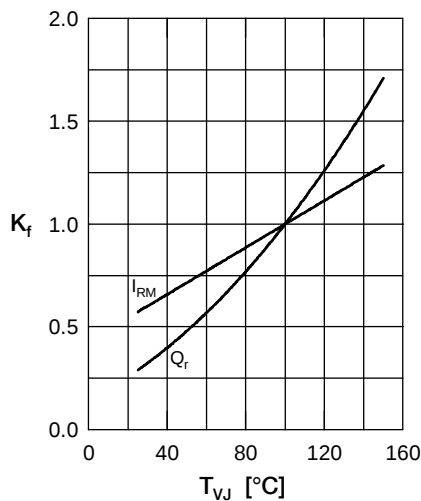


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

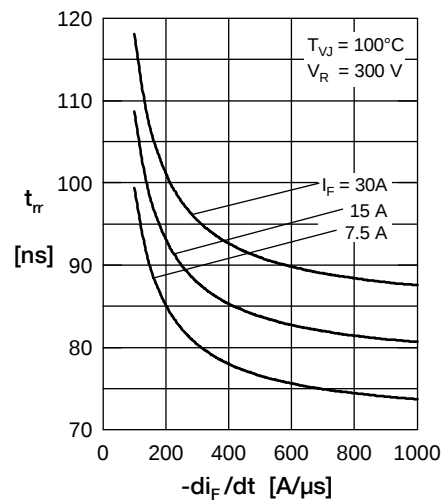


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

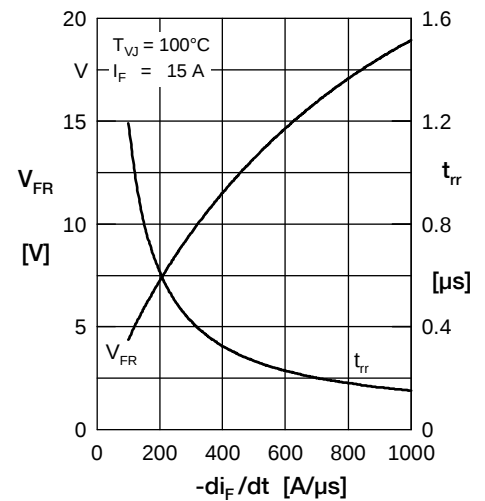


Fig. 6 Typ. peak forward voltage V_{FR} and t_{rr} versus di_F/dt

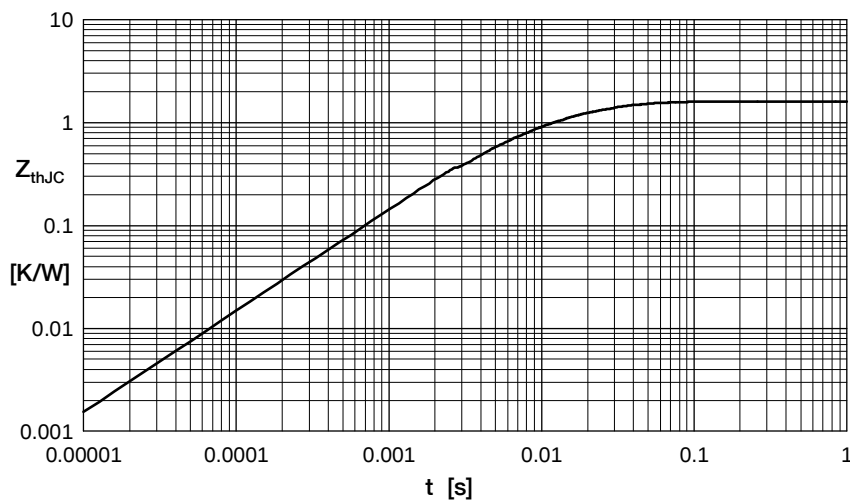


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.908	0.0052
2	0.350	0.0003
3	0.342	0.017