




| Rectifier | | | | Ratings | | | |
|------------|--|---|------------------------------|---------|------|---------------|------------------|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit | |
| V_{RSM} | max. non-repetitive reverse blocking voltage | | | | 1300 | V | |
| V_{RRM} | max. repetitive reverse blocking voltage | | | | 1200 | V | |
| I_R | reverse current | $V_R = 1200\text{ V}$ | | | 40 | μA | |
| | | $V_R = 1200\text{ V}$ | | | 1.5 | mA | |
| V_F | forward voltage drop | $I_F = 25\text{ A}$ | | | 1.23 | V | |
| | | $I_F = 50\text{ A}$ | | | 1.47 | V | |
| | | $I_F = 25\text{ A}$ | $T_{VJ} = 150^\circ\text{C}$ | | | 1.16 | V |
| | | $I_F = 50\text{ A}$ | $T_{VJ} = 150^\circ\text{C}$ | | | 1.50 | V |
| I_{FAV} | average forward current | $T_C = 135^\circ\text{C}$ 180° sine | | | 25 | A | |
| V_{F0} | threshold voltage | } for power loss calculation only | | | 0.81 | V | |
| r_F | slope resistance | | | | 13.8 | m Ω | |
| R_{thJC} | thermal resistance junction to case | | | | 0.9 | K/W | |
| R_{thCH} | thermal resistance case to heatsink | | | 0.3 | | K/W | |
| P_{tot} | total power dissipation | | | | 160 | W | |
| I_{FSM} | max. forward surge current | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 45^\circ\text{C}$ | | | 300 | A |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | | 325 | A |
| | | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 150^\circ\text{C}$ | | | 255 | A |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | | 275 | A |
| I^2t | value for fusing | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 45^\circ\text{C}$ | | | 450 | A ² s |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | | 440 | A ² s |
| | | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 150^\circ\text{C}$ | | | 325 | A ² s |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | | 315 | A ² s |
| C_J | junction capacitance | $V_R = 400\text{ V}; f = 1\text{ MHz}$ | $T_{VJ} = 25^\circ\text{C}$ | | 10 | pF | |



| Package TO-247 | | | Ratings | | | |
|----------------|------------------------------|--------------|---------|------|------|------|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit |
| I_{RMS} | RMS current | per terminal | | | 70 | A |
| T_{VJ} | virtual junction temperature | | -40 | | 175 | °C |
| T_{op} | operation temperature | | -40 | | 150 | °C |
| T_{stg} | storage temperature | | -40 | | 150 | °C |
| Weight | | | | 6 | | g |
| M_D | mounting torque | | 0.8 | | 1.2 | Nm |
| F_C | mounting force with clip | | 20 | | 120 | N |

Product Marking




| Ordering | Ordering Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-----------------|--------------------|---------------|----------|----------|
| Standard | DSP25-12A | DSP25-12A | Tube | 30 | 463604 |

| Similar Part | Package | Voltage class |
|--------------|----------------------|---------------|
| DSP25-12AT | TO-268AA (D3Pak) (2) | 1200 |
| DSP25-16A | TO-247AD (3) | 1600 |
| DSP25-16AR | ISOPLUS247 (3) | 1600 |
| DSP25-16AT | TO-268AA (D3Pak) (2) | 1600 |

Equivalent Circuits for Simulation

** on die level*

$T_{VJ} = 175^{\circ}\text{C}$





Rectifier

| | | | |
|--------------|--------------------|------|----|
| $V_{0\ max}$ | threshold voltage | 0.81 | V |
| $R_{0\ max}$ | slope resistance * | 11.2 | mΩ |



Outlines TO-247

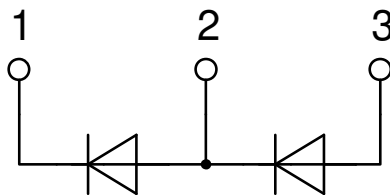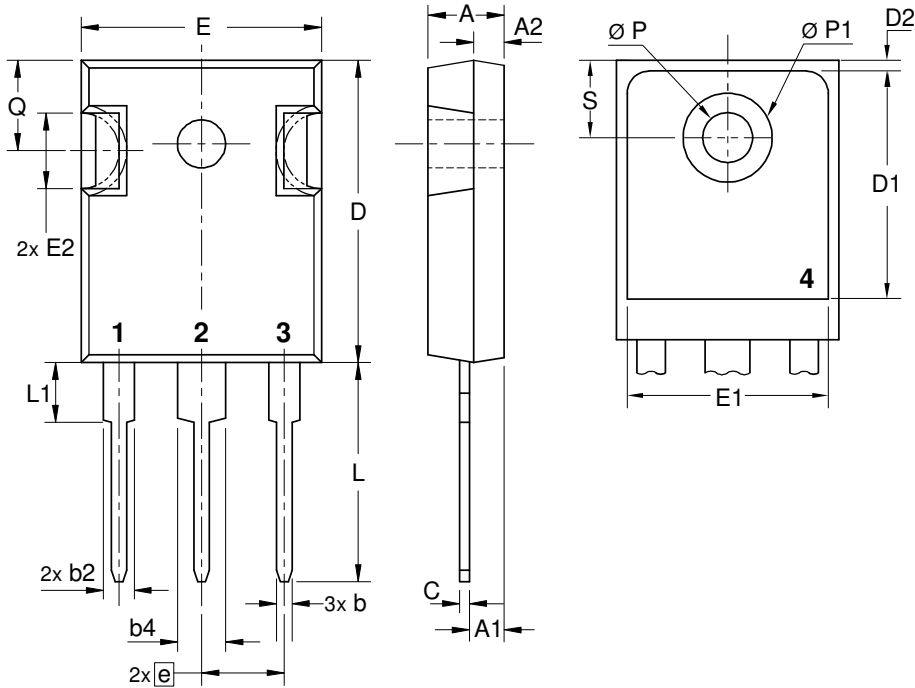

Rectifier

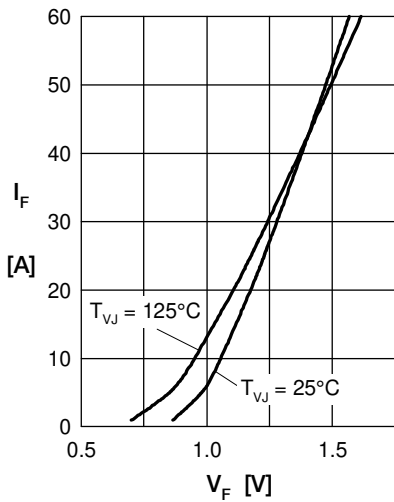


Fig. 1 Forward current versus voltage drop per diode

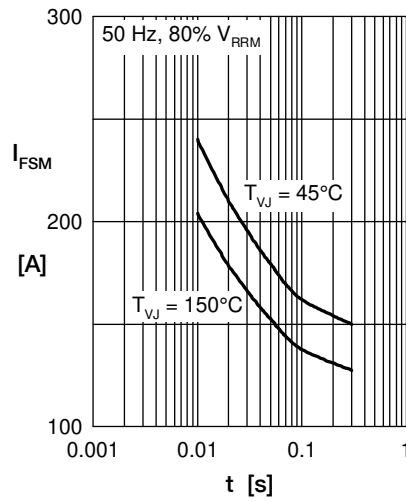


Fig. 2 Surge overload current

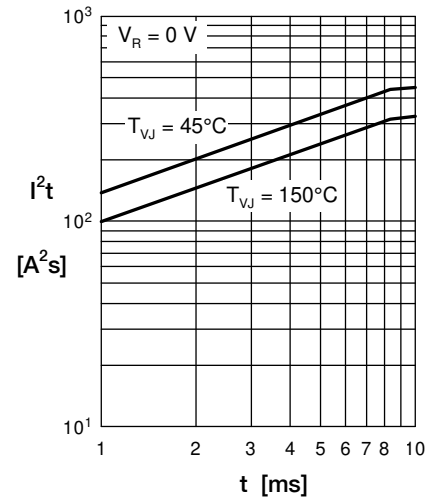


Fig. 3 I^2t versus time per diode

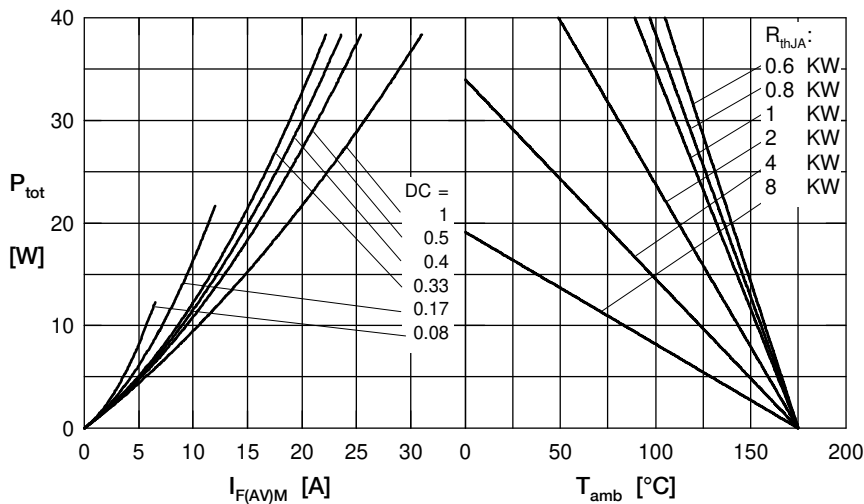


Fig. 4 Power dissipation vs. direct output current and ambient temperature

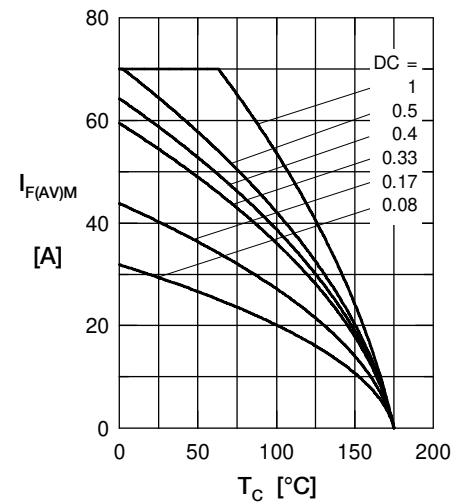


Fig. 5 Max. forward current vs. case temperature

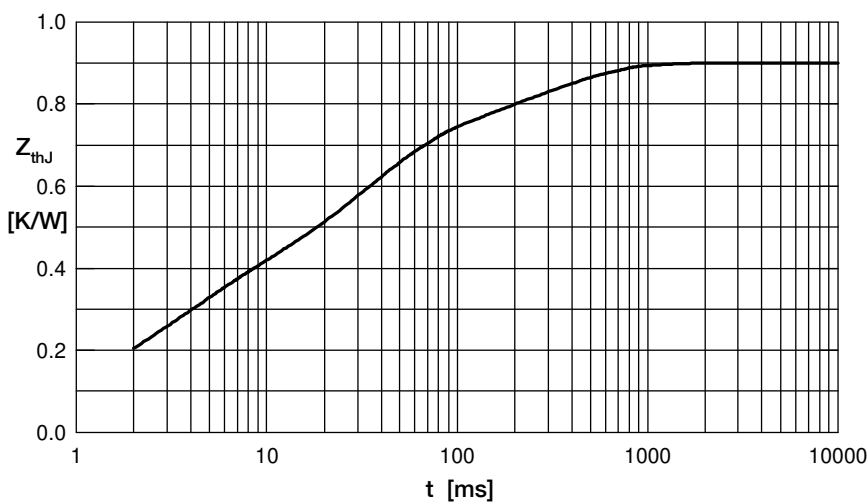


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.03 | 0.0004 |
| 2 | 0.08 | 0.002 |
| 3 | 0.2 | 0.003 |
| 4 | 0.39 | 0.03 |
| 5 | 0.2 | 0.29 |