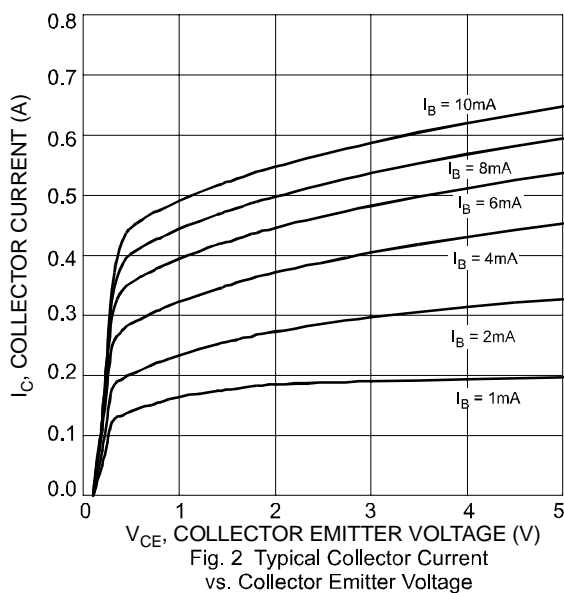
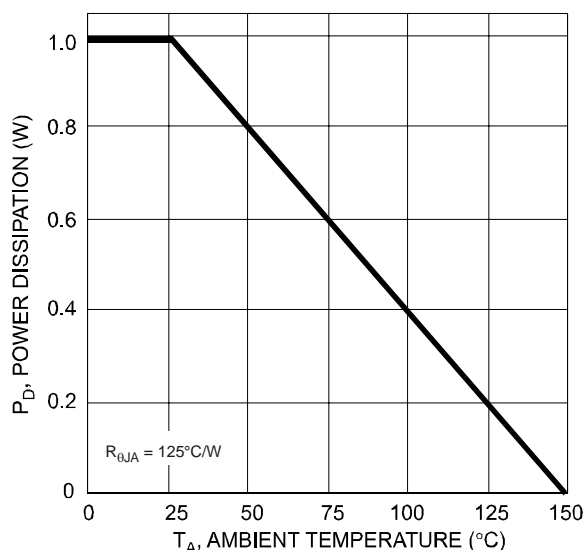


## Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Conditions
OFF CHARACTERISTICS (Note 4)					
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	75	—	V	$I_C = 10\mu A, I_E = 0$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	40	—	V	$I_C = 10mA, I_B = 0$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6	—	V	$I_E = 10\mu A, I_C = 0$
Collector Cut-Off Current	$I_{CBO}$	—	10	nA	$V_{CB} = 50V, I_E = 0$
Emitter Cut-Off Current	$I_{EBO}$	—	10	nA	$V_{CB} = 50V, I_E = 0, T_A = 150^{\circ}C$
Collector-Emitter Cut-Off Current	$I_{CEX}$	—	10	nA	$V_{CE} = 60V, V_{EB(off)} = 3V$
ON CHARACTERISTICS (Note 4)					
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	—	0.3	V	$I_C = 150mA, I_B = 15mA$
		—	1.0	V	$I_C = 500mA, I_B = 50mA$
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	0.6	1.2	V	$I_C = 150mA, I_B = 15mA$
		—	2.0	V	$I_C = 500mA, I_B = 50mA$
DC Current Gain	$h_{FE}$	35	—	V	$I_C = 0.1mA, V_{CE} = 10V$
		50	—		$I_C = 1mA, V_{CE} = 10V$
		75	—		$I_C = 10mA, V_{CE} = 10V$
		35	—		$I_C = 10mA, V_{CE} = 10V, T_A = -55^{\circ}C$
		100	300		$I_C = 150mA, V_{CE} = 10V$
		50	—		$I_C = 150mA, V_{CE} = 1V$
		40	—		$I_C = 500mA, V_{CE} = 10V$
SMALL SIGNAL CHARACTERISTICS					
Transition Frequency	$f_T$	300	—	MHz	$I_C = 20mA, V_{CE} = 20V, f = 100MHz$
Output Capacitance	$C_{obo}$	—	8	pF	$V_{CB} = 10V, I_E = 0, f = 1MHz$
Input Capacitance	$C_{ibo}$	—	25	pF	$V_{EB} = 0.5V, I_C = 0, f = 1MHz$
SWITCHING CHARACTERISTICS					
Delay Time	$t_d$	—	10	ns	$V_{CE} = 30V, V_{EB(off)} = 0.5V, I_C = 150mA, I_{B1} = 15mA$
Rise Time	$t_r$	—	25	ns	
Storage Time	$t_s$	—	225	ns	$V_{CE} = 30V, I_C = 150mA, I_{B1} = I_{B2} = 15mA$
Fall Time	$t_f$	—	60	ns	

Notes: 4. Measured under pulsed conditions. Pulse width = 300 μs. Duty Cycle, d <= 2%.



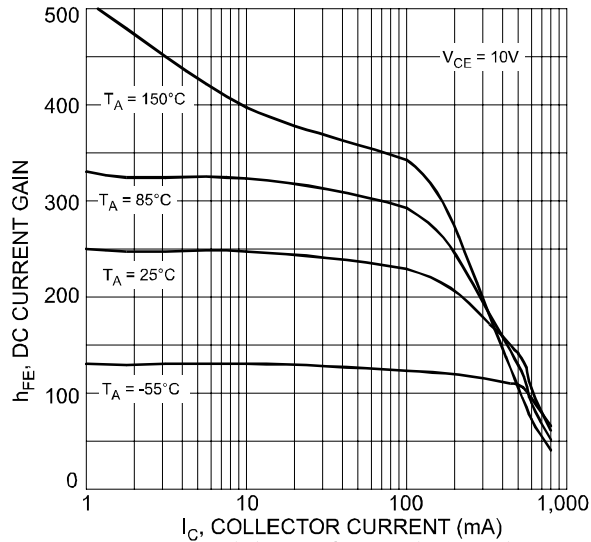


Fig. 3 Typical DC Current Gain vs. Collector Current

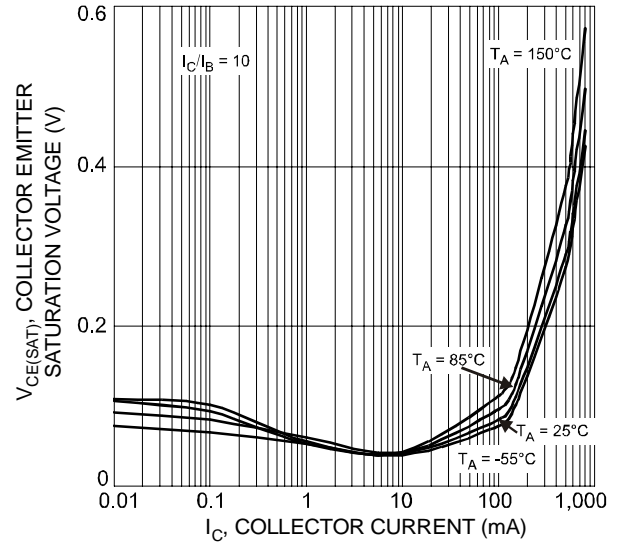


Fig. 4 Typical Collector Emitter Saturation Voltage vs. Collector Current

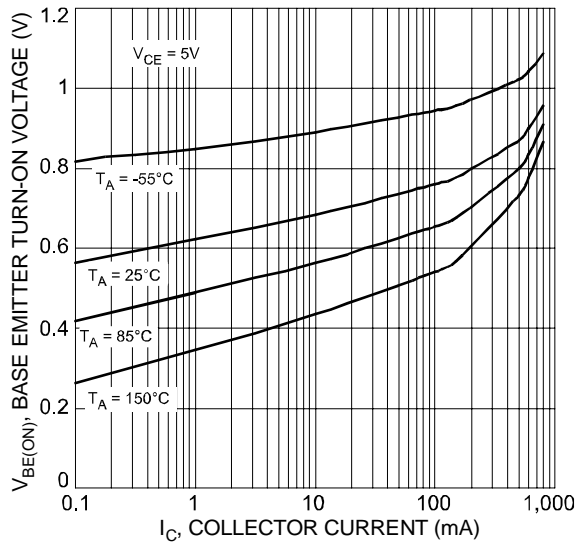


Fig. 5 Typical Base Emitter Turn-On Voltage vs. Collector Current

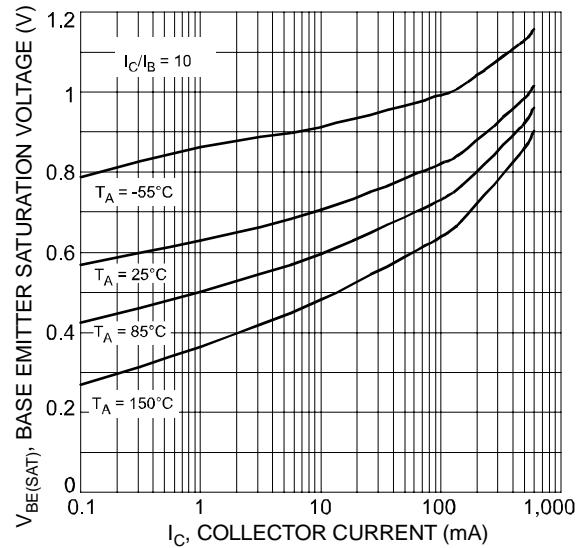


Fig. 6 Typical Base Emitter Saturation Voltage vs. Collector Current

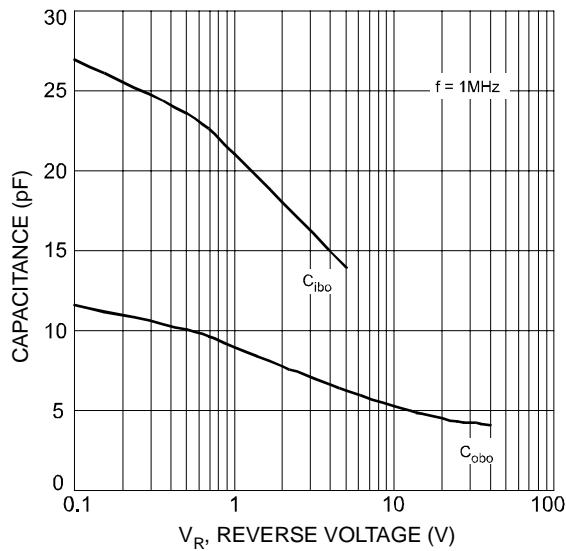


Fig. 7 Typical Capacitance Characteristics

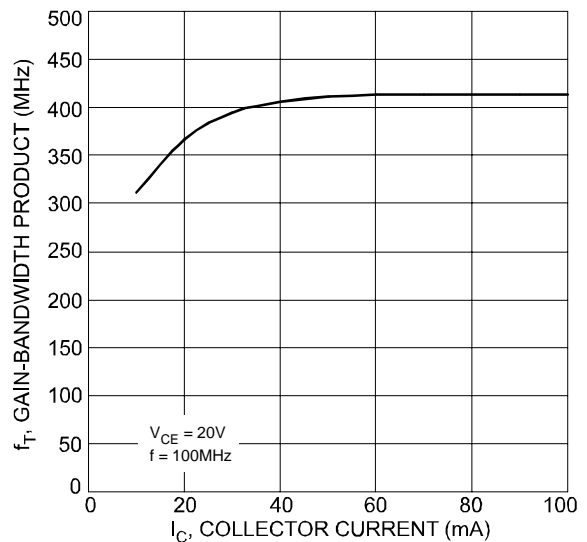



Fig. 8 Typical Gain-Bandwidth Product vs. Collector Current

## Ordering Information (Note 5)

Device	Packaging	Shipping
DZT2222A-13	SOT-223	2500/Tape & Reel


Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information




K1P = Product Type Marking Code  
 YWW = Date Code Marking  
 Y = Last Digit of Year ex: 7 = 2007  
 WW = Week Code 01-52

## Package Outline Dimensions

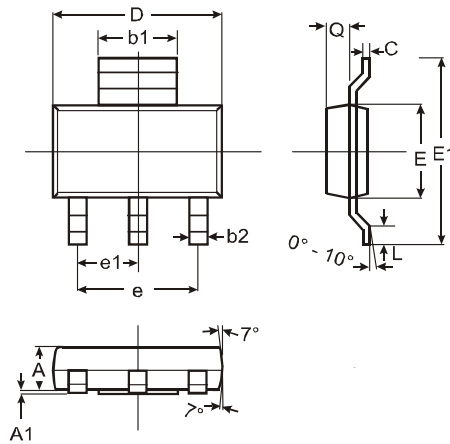

SOT-223			
Dim	Min	Max	Typ
A	1.55	1.65	1.60
A1	0.010	0.15	0.05
b1	2.90	3.10	3.00
b2	0.60	0.80	0.70
C	0.20	0.30	0.25
D	6.45	6.55	6.50
E	3.45	3.55	3.50
E1	6.90	7.10	7.00
e	—	—	4.60
e1	—	—	2.30
L	0.55	0.75	0.65
Q	0.84	0.94	0.89
All Dimensions in mm			

## Suggested Pad Layout: (Based on IPC-SM-782)

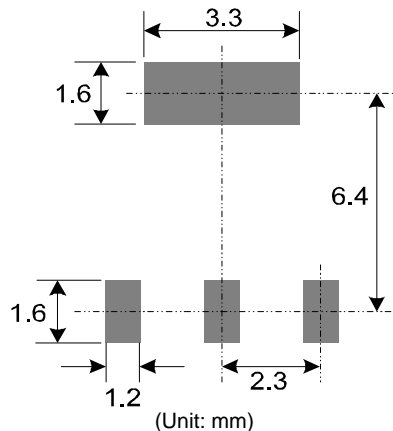

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.