

Applications

- Mobile terminal platforms

Order codes

Part Number	Package	Packing
E-STLC2500C	WFBGA48	Tray
E-STLC2500CTR	WFBGA48	Tape-on-reel

Figure 1. Block diagram

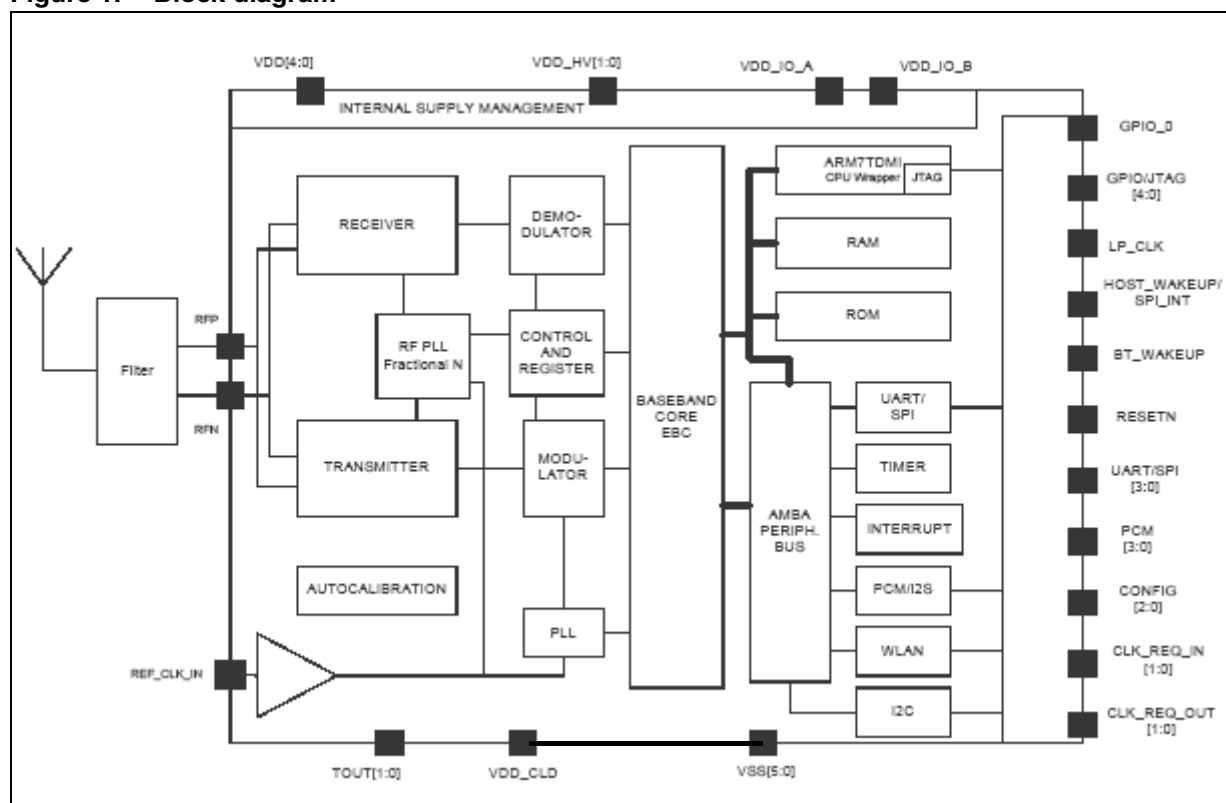


Table 1. Technical specifications

Parameter	Values
Power consumption	
Audio communication	HV3: 10.9mA, 3-EV3: 6.2mA
Data communication at maximum throughput	DH1: 22mA, 3-DH5: 35.4mA
Complete power down	1 μ A
Data rate throughput at host interface in EDR mode	2.178 Mbps

Revision history

Table 2. Document revision history

Date	Revision	Changes
29-Jan-2006	1	Initial release.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com