



ICPL2630 / ICPL2631

Truth Table (Positive Logic)

Input	Output
H	L
L	H

ELECTRICAL CHARACTERISTICS

INPUT ($T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
Forward Voltage	V_F	$I_F = 10\text{mA}$, $T_A = 25^{\circ}\text{C}$		1.4	1.8	V
Reverse Voltage	V_R	$I_R = 10\mu\text{A}$	5.0			V
Temperature Coefficient	$\Delta V_F / \Delta T_A$	$I_F = 10\text{mA}$		-1.8		mV/ $^{\circ}\text{C}$
Input Capacitance	C_{IN}	$V_F = 0\text{V}$, $f = 1\text{MHz}$		60		pF

OUTPUT ($T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
High Level Supply Current	I_{CCH}	$I_F = 0\text{mA}$, $V_{CC} = 5.5\text{V}$		12.5	18	mA
Low Level Supply Current	I_{CCL}	$I_F = 10\text{mA}$, $V_{CC} = 5.5\text{V}$		14.5	21	mA

COUPLED ($T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
High Level Output Current	I_{OH}	$V_{CC} = 5.5\text{V}$, $V_O = 5.5\text{V}$, $I_F = 250\mu\text{A}$		2.1	100	μA
Low Level Output Voltage	V_{OL}	$V_{CC} = 5.5\text{V}$, $I_F = 5\text{mA}$, $I_{CL} = 13\text{mA}$		0.35	0.6	V
Input Threshold Current	I_{FT}	$V_{CC} = 5.5\text{V}$, $V_O = 0.6\text{V}$, $I_{OL} = 13\text{mA}$		2.5	5	mA



ICPL2630 / ICPL2631

ELECTRICAL CHARACTERISTICS

Switching Characteristics ($T_A = -40^{\circ}\text{C}$ to 85°C , $V_{CC} = 5\text{V}$, $I_F = 7.5\text{mA}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
Propagation Delay Time to Output High Level	t_{PLH}	$C_L = 15\text{pF}$, $R_L = 350\Omega$, $T_A = 25^{\circ}\text{C}$		35	100	ns
Propagation Delay Time to Output Low Level	t_{PHL}	$C_L = 15\text{pF}$, $R_L = 350\Omega$, $T_A = 25^{\circ}\text{C}$		40	100	ns
Pulse Width Distortion	$ t_{PHL} - t_{PLH} $	$C_L = 15\text{pF}$, $R_L = 350\Omega$		5	35	ns
Output Rise Time	t_r	$C_L = 15\text{pF}$, $R_L = 350\Omega$		40		ns
Output Fall time	t_f	$C_L = 15\text{pF}$, $R_L = 350\Omega$		10		ns
Common Mode Transient Immunity at Logic High	CM_H	ICPL2630 ICPL2631 $I_F = 0\text{mA}$, $V_{CM} = 1\text{kVp-p}$, $V_{OH} = 2.0\text{V}$, $R_L = 350\Omega$, $T_A = 25^{\circ}\text{C}$	5000 10000	20000		V/ μs
Common Mode Transient Immunity at Logic Low	CM_L	ICPL2630 ICPL2631 $I_F = 7.5\text{mA}$, $V_{CM} = 1\text{kVp-p}$, $V_{OL} = 0.8\text{V}$, $R_L = 350\Omega$, $T_A = 25^{\circ}\text{C}$	5000 10000	20000		V/ μs

Notes :

1. The V_{CC} supply must be bypassed by a $0.1\mu\text{F}$ capacitor or larger with good high frequency characteristic and should be connected as close as possible to the package V_{CC} and Gnd pins.
2. t_{PLH} — Propagation delay is measured from the 3.75mA level on the HIGH to LOW transition of the input current pulse to the 1.5V level on the LOW to HIGH transition of the output voltage pulse.
3. t_{PHL} — Propagation delay is measured from the 3.75mA level on the LOW to HIGH transition of the input current pulse to the 1.5V level on the HIGH to LOW transition of the output voltage pulse.
4. t_r — Rise time is measured from the 10% to the 90% levels on the LOW to HIGH transition of the output pulse.
5. t_f — Fall time is measured from the 90% to the 10% levels on the HIGH to LOW transition of the output pulse.
6. CM_H — The maximum tolerable rate of rise of the common mode voltage to ensure the output will remain in the HIGH state (i.e., $V_{OUT} > 2.0\text{V}$).
7. CM_L — The maximum tolerable rate of rise of the common mode voltage to ensure the output will remain in the LOW output state (i.e., $V_{OUT} < 0.8\text{V}$).



ICPL2630 / ICPL2631

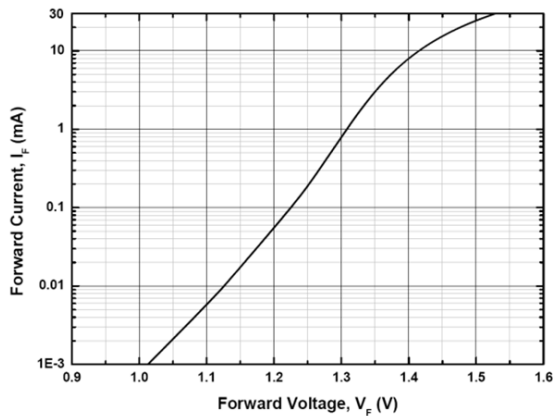


Fig 1 Forward Current vs Forward Voltage

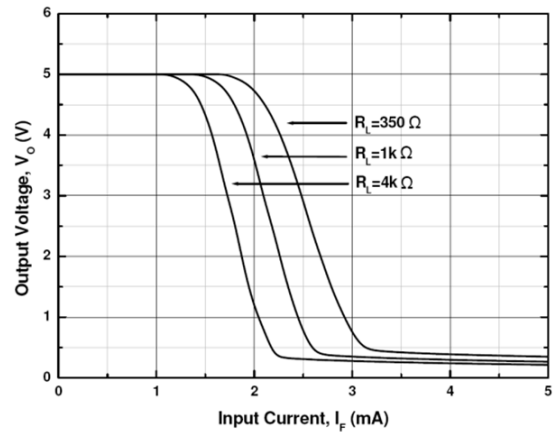


Fig 2 Output Voltage vs Input Current

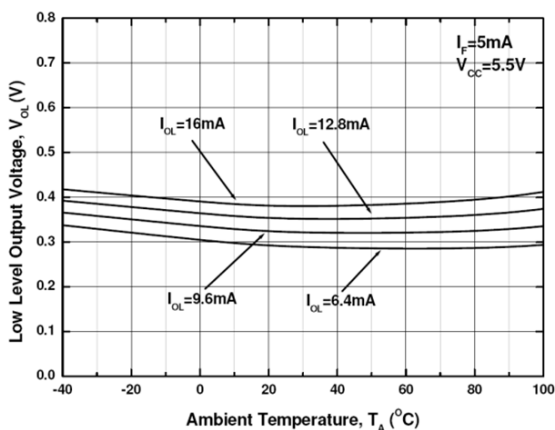


Fig 3 Low Level Output Voltage vs T_A

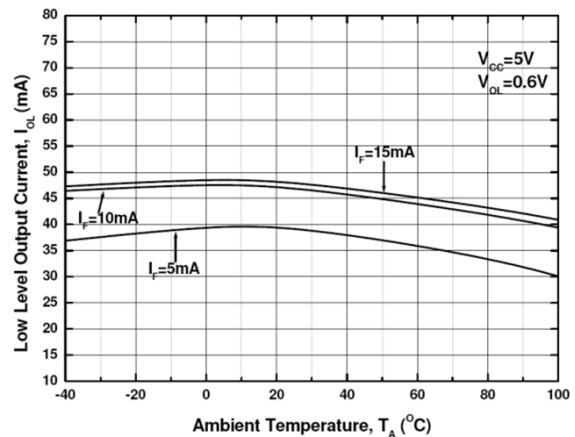


Fig 4 Low Level Output Current vs T_A

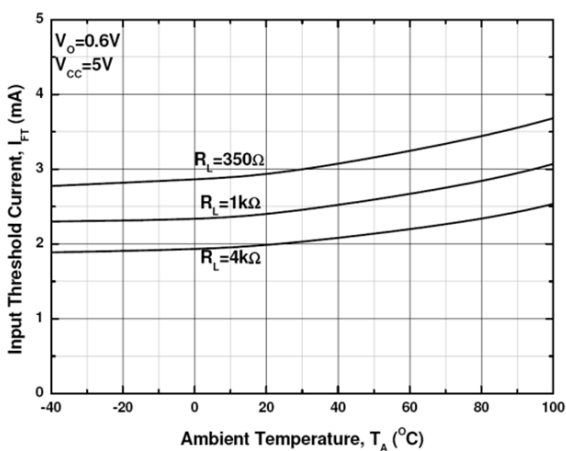


Fig 5 Input Threshold Current vs T_A





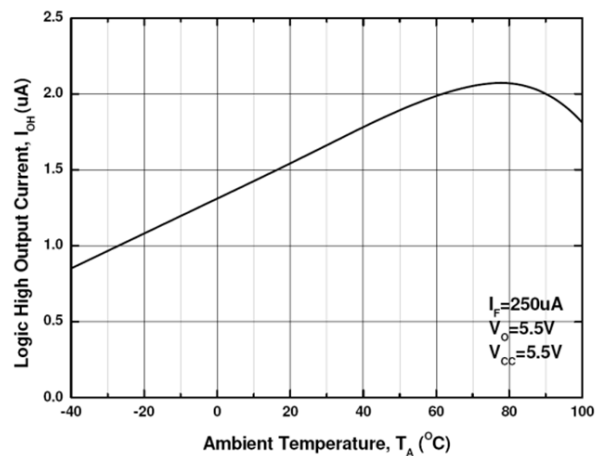


Fig 6 High Level Output Current vs T_A

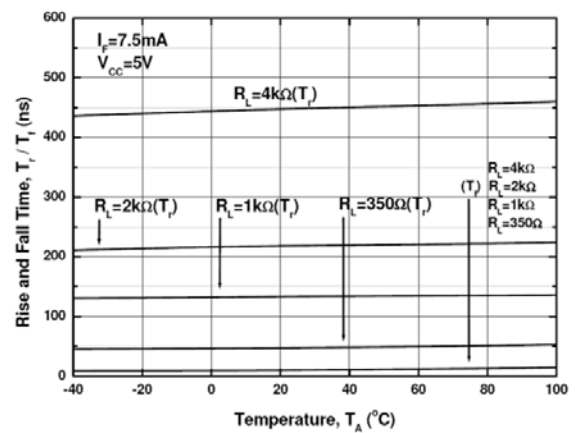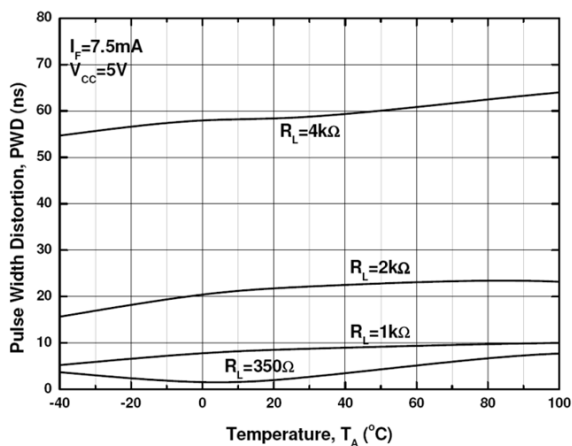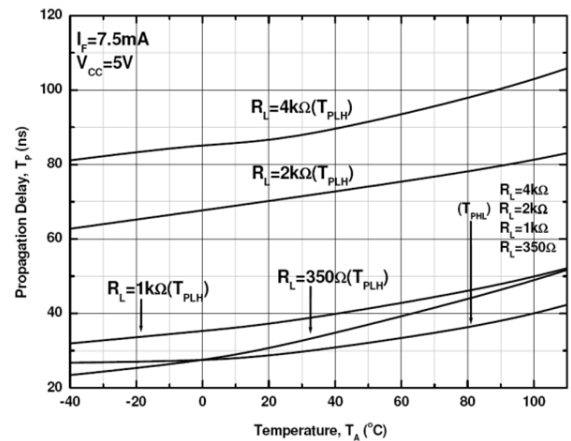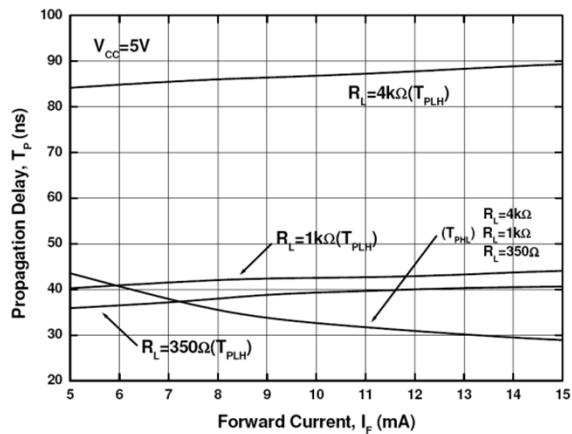

ICPL2630 / ICPL2631

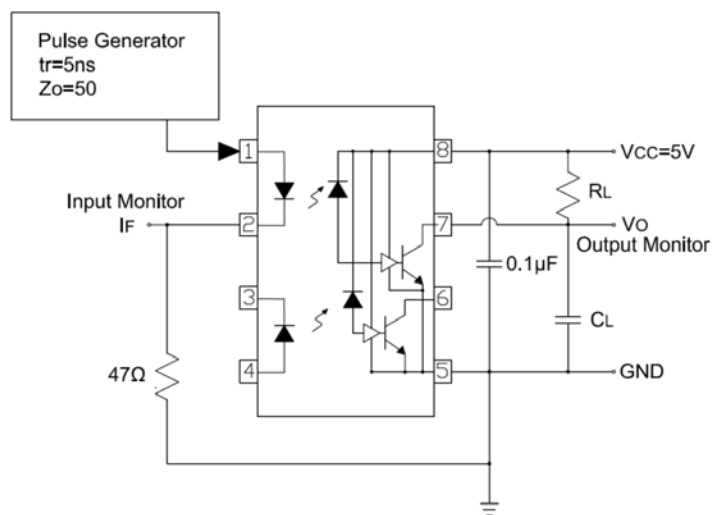


Fig 11 Switching Time Test Circuit



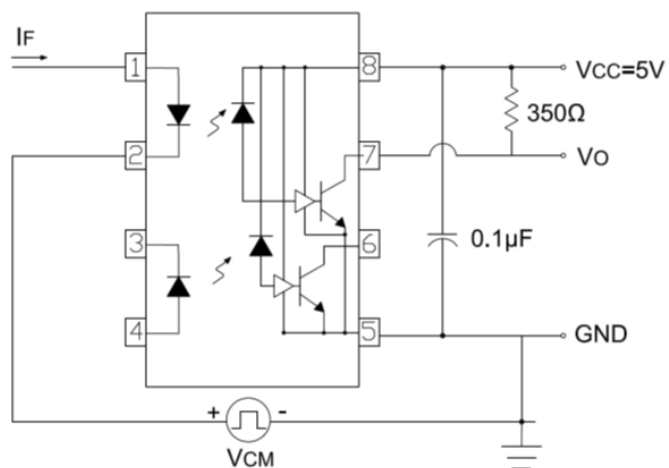


Fig 12 Common Mode Transient Immunity Test Circuit

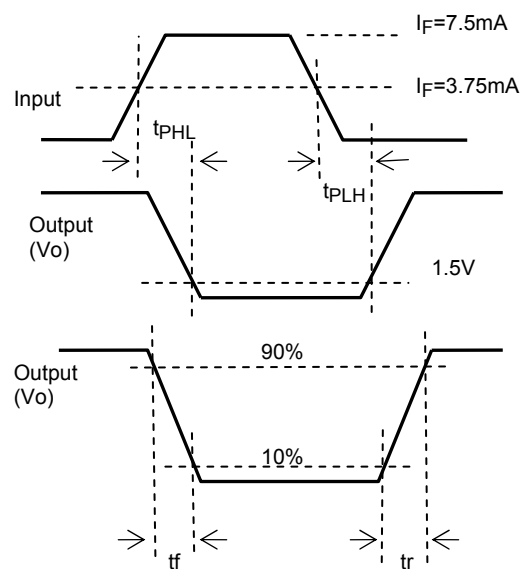

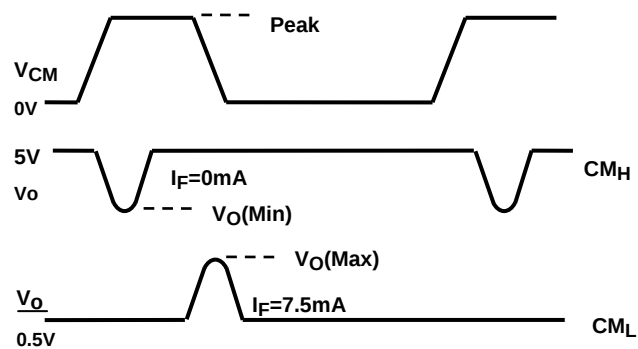

ISOCOM
—|>—|>—|>—
COMPONENTS

ICPL2630 / ICPL2631

ORDER INFORMATION

ICPL2630, ICPL2631

After PN	Description	Packing quantity
None	Standard DIP8	50 pcs per tube
G	10mm Lead Spacing	50 pcs per tube
SM	Surface Mount	50 pcs per tube
SMT&R	Surface Mount Tape & Reel	1000 pcs per reel




ISOCOM
COMPONENTS


ICPL2630 / ICPL2631

PACKAGE DIMENSIONS (mm)

DIP

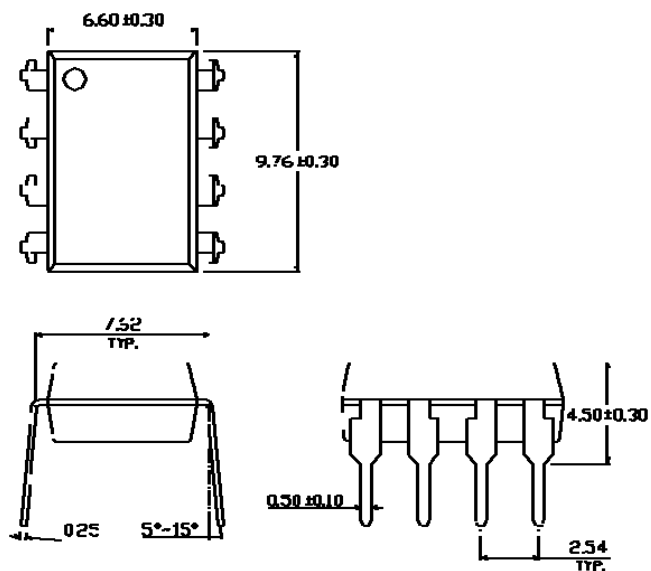

G FORM

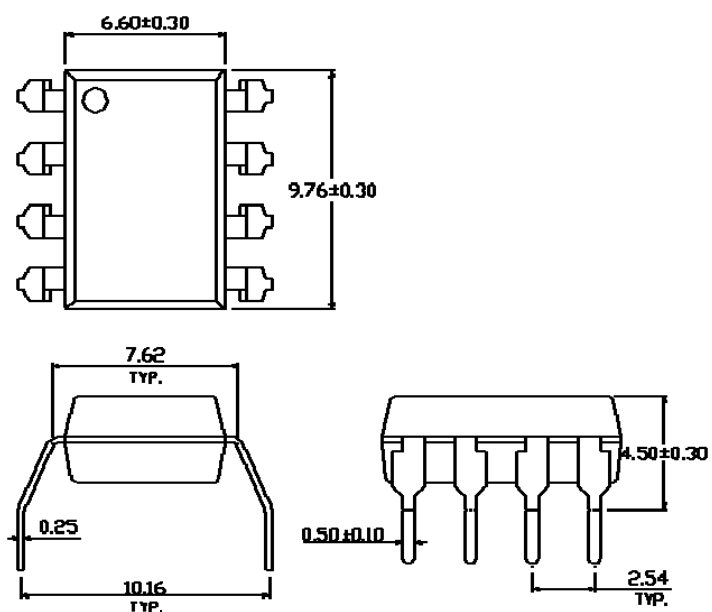




ISOCOM
COMPONENTS

ICPL2630 / ICPL2631

SMD

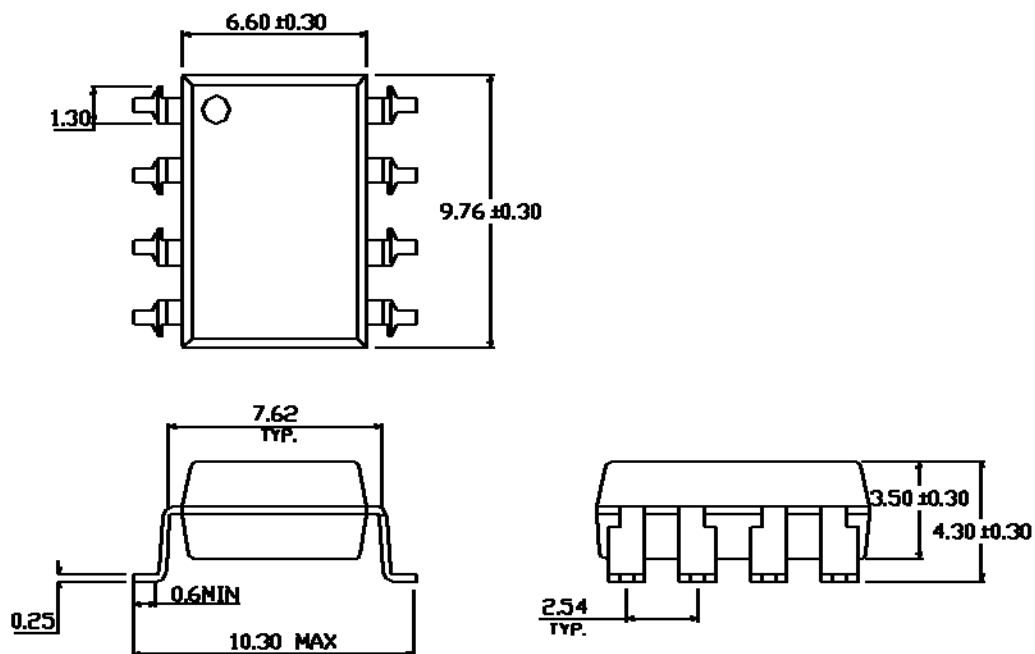

REFLOW SOLDERING TEMPERATURE PROFILE

