



# ISP1582

## Hi-Speed USB peripheral controller

Rev. 08 — 22 January 2009

Product data sheet

## 1. General description

---

The ISP1582 is a cost-optimized and feature-optimized Hi-Speed Universal Serial Bus (USB) peripheral controller. It fully complies with [Ref. 1 "Universal Serial Bus Specification Rev. 2.0"](#), supporting data transfer at high-speed (480 Mbit/s) and full-speed (12 Mbit/s).

The ISP1582 provides high-speed USB communication capacity to systems based on microcontrollers or microprocessors. It communicates with a microcontroller or microprocessor of a system through a high-speed general-purpose parallel interface.

The ISP1582 supports automatic detection of Hi-Speed USB system operation. Original USB fall-back mode allows the device to remain operational under full-speed conditions. It is designed as a generic USB peripheral controller so that it can fit into all existing device classes, such as imaging class, mass storage devices, communication devices, printing devices and human interface devices.

The internal generic Direct Memory Access (DMA) block allows easy integration into data streaming applications.

The modular approach to implementing a USB peripheral controller allows the designer to select the optimum system microcontroller from the wide variety available. The ability to reuse existing architecture and firmware shortens the development time, eliminates risk and reduces cost. The result is fast and efficient development of the most cost-effective USB peripheral solution.

The ISP1582 also incorporates features such as SoftConnect<sup>1</sup>, a reduced frequency crystal oscillator, and integrated termination resistors. These features allow significant cost savings in system design and easy implementation of advanced USB functionality into PC peripherals.

## 2. Features

---

- Complies fully with:
  - ◆ [Ref. 1 "Universal Serial Bus Specification Rev. 2.0"](#)
  - ◆ Most device class specifications
  - ◆ ACPI, OnNow and USB power management requirements
- Supports data transfer at high-speed (480 Mbit/s) and full-speed (12 Mbit/s)
- High performance USB peripheral controller with integrated Serial Interface Engine (SIE), Parallel Interface Engine (PIE), FIFO memory and data transceiver
- Automatic Hi-Speed USB mode detection and Original USB fall-back mode
- Supports sharing mode

---

1. SoftConnect is a trademark of ST-NXP Wireless.

# ST-NXP Wireless

- Supports  $V_{BUS}$  sensing
- Supports Generic DMA (GDMA) slave mode
- High-speed DMA interface
- Fully autonomous and multi-configuration DMA operation
- Seven IN endpoints, seven OUT endpoints, and a fixed control IN and OUT endpoint
- Integrated physical 8 kB of multi-configuration FIFO memory
- Endpoints with double buffering to increase throughput and ease real-time data transfer
- Bus-independent interface with most microcontrollers and microprocessors
- 12 MHz crystal oscillator with integrated PLL for low EMI
- Software-controlled connection to the USB bus (SoftConnect)
- Low-power consumption in operation and power-down modes; suitable for use in bus-powered USB devices
- Supports Session Request Protocol (SRP) that adheres to [Ref. 2 “On-The-Go Supplement to the USB Specification Rev. 1.3”](#)
- Internal power-on and low-voltage reset circuits; also supports software reset
- Operation over the extended USB bus voltage range (DP, DM and  $V_{BUS}$ )
- 5 V tolerant I/O pads
- Operating temperature range from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$
- Available in HVQFN56 halogen-free and lead-free package

### 3. Applications


- Personal digital assistant
- Digital video camera
- Digital still camera
- 3G mobile phone
- MP3 player
- Communication device, for example: router and modem
- Printer
- Scanner

### 4. Ordering information

Table 1. Ordering information

| Type number | Package |                                                                                                                       |          |
|-------------|---------|-----------------------------------------------------------------------------------------------------------------------|----------|
|             | Name    | Description                                                                                                           | Version  |
| ISP1582BS   | HVQFN56 | plastic thermal enhanced very thin quad flat package; no leads; 56 terminals; body $8 \times 8 \times 0.85\text{ mm}$ | SOT684-1 |


## 5. Block diagram

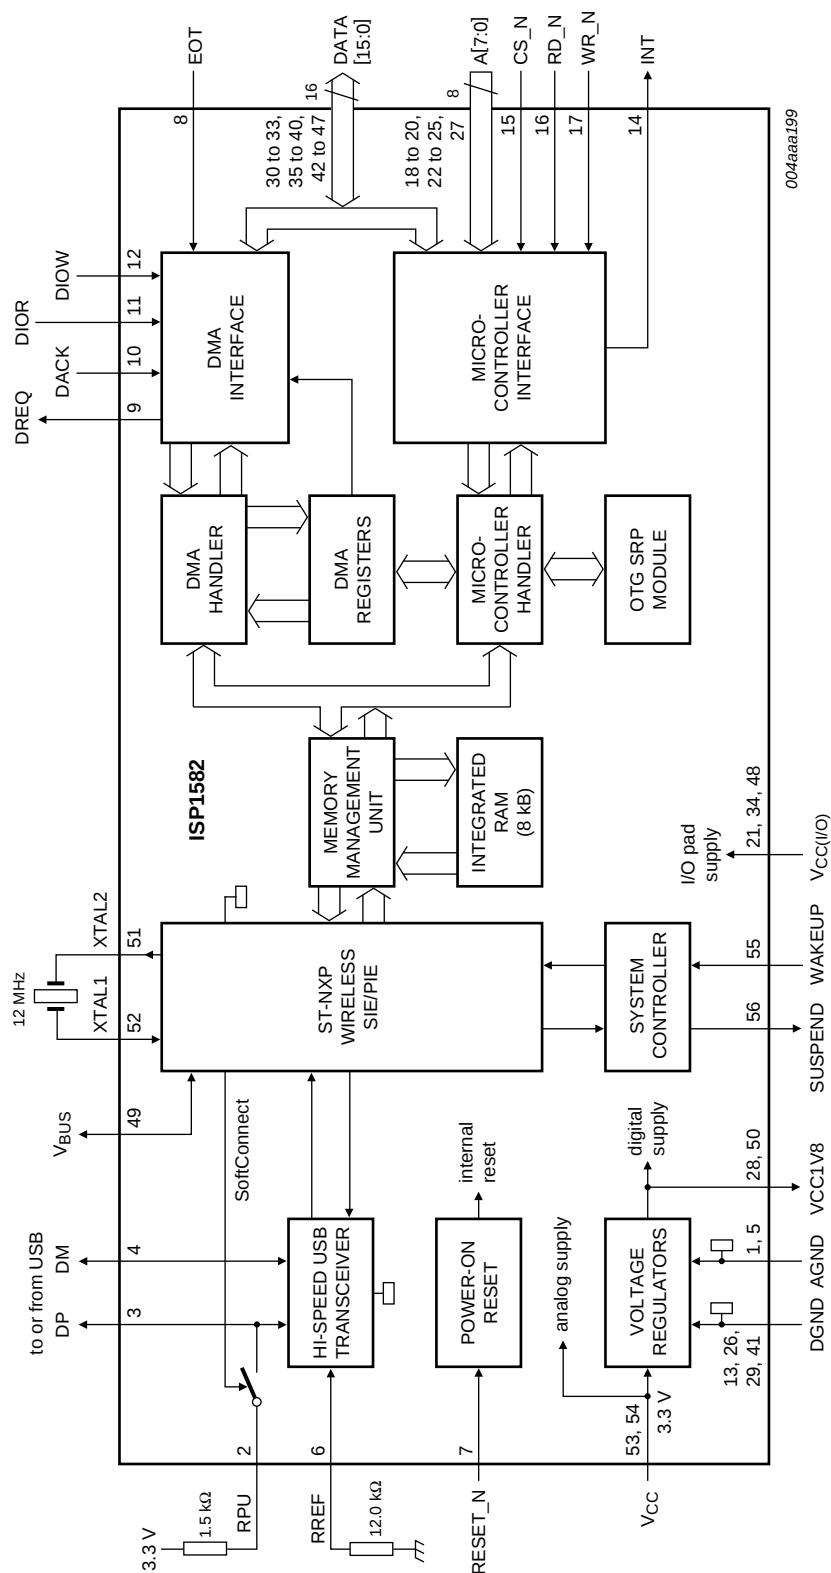

**Fig 1. Block diagram**

6. Pinning information

6.1 Pinning

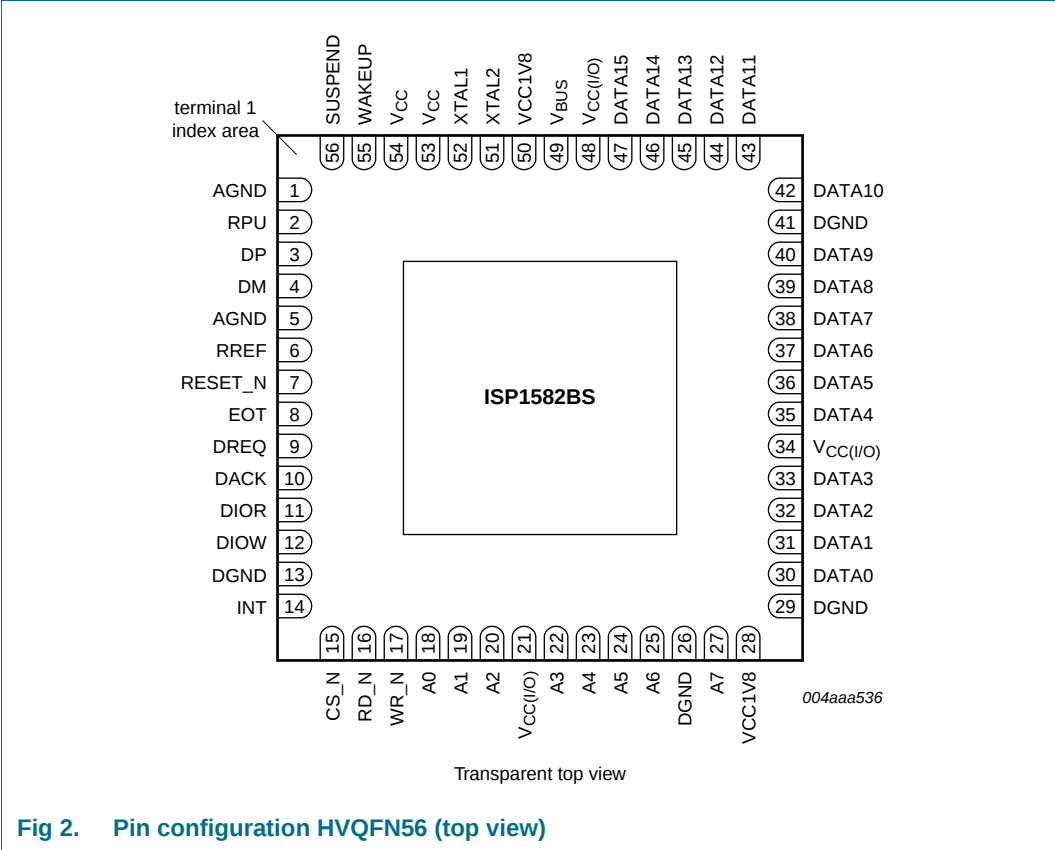

6.2 Pin description

Table 2. Pin description

| Symbol <sup>[1]</sup> | Pin | Type <sup>[2]</sup> | Description                                                                                                                            |
|-----------------------|-----|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| AGND                  | 1   | -                   | analog ground                                                                                                                          |
| RPU                   | 2   | A                   | pull-up resistor connection; connect to the external pull-up resistor for pin DP; must be connected to 3.3 V through a 1.5 kΩ resistor |
| DP                    | 3   | A                   | USB D+ line connection (analog)                                                                                                        |
| DM                    | 4   | A                   | USB D– line connection (analog)                                                                                                        |
| AGND                  | 5   | -                   | analog ground                                                                                                                          |
| RREF                  | 6   | A                   | external bias resistor connection; connect to the external bias resistor; must be connected to ground through a 12.0 kΩ ± 1 % resistor |

Table 2. Pin description ...continued

| Symbol <sup>[1]</sup>               | Pin | Type <sup>[2]</sup> | Description                                                                                                                                                                                                                                                                                          |
|-------------------------------------|-----|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RESET_N                             | 7   | I                   | reset input (500 $\mu$ s); a LOW level produces an asynchronous reset; connect to V <sub>CC</sub> for power-on reset (internal POR circuit)<br>When the RESET_N pin is LOW, ensure that the WAKEUP pin does not go from LOW to HIGH; otherwise the device will enter test mode.<br>TTL; 5 V tolerant |
| EOT                                 | 8   | I                   | end-of-transfer input (programmable polarity); when not in use, connect this pin to V <sub>CC(I/O)</sub> through a 10 k $\Omega$ resistor<br>input pad; TTL; 5 V tolerant                                                                                                                            |
| DREQ                                | 9   | O                   | DMA request (programmable polarity) output; when not in use, connect this pin to ground through a 10 k $\Omega$ resistor; see <a href="#">Table 51</a> and <a href="#">Table 52</a><br>TTL; 4 ns slew-rate control                                                                                   |
| DACK                                | 10  | I                   | DMA acknowledge input (programmable polarity); when not in use, connect this pin to V <sub>CC(I/O)</sub> through a 10 k $\Omega$ resistor; see <a href="#">Table 51</a> and <a href="#">Table 52</a><br>TTL; 5 V tolerant                                                                            |
| DIOR                                | 11  | I                   | DMA read strobe input (programmable polarity); when not in use, connect this pin to V <sub>CC(I/O)</sub> through a 10 k $\Omega$ resistor; see <a href="#">Table 51</a> and <a href="#">Table 52</a><br>TTL; 5 V tolerant                                                                            |
| DIOW                                | 12  | I                   | DMA write strobe input (programmable polarity); when not in use, connect this pin to V <sub>CC(I/O)</sub> through a 10 k $\Omega$ resistor; see <a href="#">Table 51</a> and <a href="#">Table 52</a><br>TTL; 5 V tolerant                                                                           |
| DGND                                | 13  | -                   | digital ground                                                                                                                                                                                                                                                                                       |
| INT                                 | 14  | O                   | interrupt output; programmable polarity (active HIGH or LOW) and signaling (edge or level triggered)<br>CMOS output; 8 mA drive                                                                                                                                                                      |
| CS_N                                | 15  | I                   | chip select input<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                                    |
| RD_N                                | 16  | I                   | read strobe input<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                                    |
| WR_N                                | 17  | I                   | write strobe input<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                                   |
| A0                                  | 18  | I                   | bit 0 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                             |
| A1                                  | 19  | I                   | bit 1 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                             |
| A2                                  | 20  | I                   | bit 2 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                             |
| V <sub>CC(I/O)</sub> <sup>[3]</sup> | 21  | -                   | supply voltage; used to supply voltage to the I/O pads; see <a href="#">Section 7.15</a>                                                                                                                                                                                                             |
| A3                                  | 22  | I                   | bit 3 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                                                             |

Table 2. Pin description ...continued

| Symbol <sup>[1]</sup>               | Pin | Type <sup>[2]</sup> | Description                                                                                                                                                                                                                                                         |
|-------------------------------------|-----|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A4                                  | 23  | I                   | bit 4 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                            |
| A5                                  | 24  | I                   | bit 5 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                            |
| A6                                  | 25  | I                   | bit 6 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                            |
| DGND                                | 26  | -                   | digital ground                                                                                                                                                                                                                                                      |
| A7                                  | 27  | I                   | bit 7 of the address bus<br>input pad; TTL; 5 V tolerant                                                                                                                                                                                                            |
| VCC1V8 <sup>[3]</sup>               | 28  | -                   | regulator output voltage ( $1.8\text{ V} \pm 0.15\text{ V}$ ); tapped out voltage from the internal regulator; this regulated voltage cannot drive external devices; decouple this pin using a $0.1\text{ }\mu\text{F}$ capacitor; see <a href="#">Section 7.15</a> |
| DGND                                | 29  | -                   | digital ground                                                                                                                                                                                                                                                      |
| DATA0                               | 30  | I/O                 | bit 0 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA1                               | 31  | I/O                 | bit 1 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA2                               | 32  | I/O                 | bit 2 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA3                               | 33  | I/O                 | bit 3 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| V <sub>CC(I/O)</sub> <sup>[3]</sup> | 34  | -                   | supply voltage; used to supply voltage to the I/O pads; see <a href="#">Section 7.15</a>                                                                                                                                                                            |
| DATA4                               | 35  | I/O                 | bit 4 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA5                               | 36  | I/O                 | bit 5 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA6                               | 37  | I/O                 | bit 6 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA7                               | 38  | I/O                 | bit 7 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA8                               | 39  | I/O                 | bit 8 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DATA9                               | 40  | I/O                 | bit 9 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                     |
| DGND                                | 41  | -                   | digital ground                                                                                                                                                                                                                                                      |
| DATA10                              | 42  | I/O                 | bit 10 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                    |
| DATA11                              | 43  | I/O                 | bit 11 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                    |
| DATA12                              | 44  | I/O                 | bit 12 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                    |

Table 2. Pin description ...continued

| Symbol <sup>[1]</sup>               | Pin             | Type <sup>[2]</sup> | Description                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------|-----------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DATA13                              | 45              | I/O                 | bit 13 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                                                                                                                                                                                |
| DATA14                              | 46              | I/O                 | bit 14 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                                                                                                                                                                                |
| DATA15                              | 47              | I/O                 | bit 15 of bidirectional data bus<br>bidirectional pad; 4 ns slew-rate control; TTL; 5 V tolerant                                                                                                                                                                                                                                                                                                                                |
| V <sub>CC(I/O)</sub> <sup>[3]</sup> | 48              | -                   | supply voltage; used to supply voltage to the I/O pads; see <a href="#">Section 7.15</a>                                                                                                                                                                                                                                                                                                                                        |
| V <sub>BUS</sub>                    | 49              | A                   | <b>USB bus power sensing input</b> — Used to detect whether the host is connected or not; connect a 1 µF electrolytic or tantalum capacitor, and a 1 MΩ pull-down resistor to ground; see <a href="#">Section 7.13</a><br><br><b>V<sub>BUS</sub> pulsing output</b> — In OTG mode; connect a 1 µF electrolytic or tantalum capacitor, and a 1 MΩ pull-down resistor to ground; see <a href="#">Section 7.13</a><br>5 V tolerant |
| VCC1V8 <sup>[3]</sup>               | 50              | -                   | voltage regulator output (1.8 V ± 0.15 V); tapped out voltage from the internal regulator; this regulated voltage cannot drive external devices; decouple this pin using 4.7 µF and 0.1 µF capacitors; see <a href="#">Section 7.15</a>                                                                                                                                                                                         |
| XTAL2                               | 51              | O                   | crystal oscillator output (12 MHz); connect a fundamental parallel-resonant crystal; leave this pin open when using an external clock source on pin XTAL1; see <a href="#">Table 79</a>                                                                                                                                                                                                                                         |
| XTAL1                               | 52              | I                   | crystal oscillator input (12 MHz); connect a fundamental parallel-resonant crystal or an external clock source (leaving pin XTAL2 unconnected); see <a href="#">Table 79</a>                                                                                                                                                                                                                                                    |
| V <sub>CC</sub> <sup>[3]</sup>      | 53              | -                   | supply voltage (3.3 V ± 0.3 V); this pin supplies the internal voltage regulator and the analog circuit; see <a href="#">Section 7.15</a>                                                                                                                                                                                                                                                                                       |
| V <sub>CC</sub> <sup>[3]</sup>      | 54              | -                   | supply voltage (3.3 V ± 0.3 V); this pin supplies the internal voltage regulator and the analog circuit; see <a href="#">Section 7.15</a>                                                                                                                                                                                                                                                                                       |
| WAKEUP                              | 55              | I                   | wake-up input; when this pin is at the HIGH level, the chip is prevented from getting into the suspend state and wake-up the chip when already in suspend mode; when not in use, connect this pin to ground through a 10 kΩ resistor<br><br>When the RESET_N pin is LOW, ensure that the WAKEUP pin does not go from LOW to HIGH; otherwise the device will enter test mode.<br>input pad; TTL; 5 V tolerant                    |
| SUSPEND                             | 56              | O                   | suspend state indicator output; used as a power switch control output to power-off or power-on external devices when going into suspend mode or recovering from suspend mode<br>CMOS output; 8 mA drive                                                                                                                                                                                                                         |
| GND                                 | exposed die pad | -                   | ground supply; down bonded to the exposed die pad (heat sink); to be connected to DGND during PCB layout                                                                                                                                                                                                                                                                                                                        |

[1] Symbol names ending with underscore N (for example, NAME\_N) represent active LOW signals.

[2] All outputs and I/O pins can source 4 mA, unless otherwise specified.

[3] Add a decoupling capacitor (0.1 µF) to all the supply pins. For better EMI results, add a 0.01 µF capacitor in parallel to the 0.1 µF.

## 7. Functional description

The ISP1582 is a high-speed USB peripheral controller. It implements the Hi-Speed USB or the Original USB physical layer, and the packet protocol layer. It concurrently maintains up to 16 USB endpoints (control IN, control OUT, and seven IN and seven OUT configurable) along with endpoint EP0 setup, which accesses the set-up buffer. The [Ref. 1](#) “Universal Serial Bus Specification Rev. 2.0”, Chapter 9 protocol handling is executed using the external firmware.

For high-bandwidth data transfer, the integrated DMA handler can be invoked to transfer data to or from external memory or devices. The DMA interface can be configured by writing to proper DMA registers (see [Section 8.4](#)).

The ISP1582 supports Hi-Speed USB and Original USB signaling. The USB signaling speed is automatically detected.

The ISP1582 has 8 kB of internal FIFO memory, which is shared among enabled USB endpoints, including control IN and control OUT endpoints, and set-up token buffer.

There are seven IN and seven OUT configurable endpoints, and two fixed control endpoints that are 64 bytes long. Any of the seven IN and seven OUT endpoints can be separately enabled or disabled. The endpoint type (interrupt, isochronous or bulk) and packet size of these endpoints can be individually configured, depending on the requirements of the application. Optional double buffering increases the data throughput of these data endpoints.

The ISP1582 requires 3.3 V power supply. It has 5 V tolerant I/O pads and an internal 1.8 V regulator to power the digital logic.

**Table 3. Endpoint access and programmability**

| Endpoint identifier | Maximum packet size | Double buffering | Endpoint type | Direction |
|---------------------|---------------------|------------------|---------------|-----------|
| EP0SETUP            | 8 bytes (fixed)     | no               | set-up token  | OUT       |
| EP0RX               | 64 bytes (fixed)    | no               | control OUT   | OUT       |
| EP0TX               | 64 bytes (fixed)    | no               | control IN    | IN        |
| EP1RX               | programmable        | yes              | programmable  | OUT       |
| EP1TX               | programmable        | yes              | programmable  | IN        |
| EP2RX               | programmable        | yes              | programmable  | OUT       |
| EP2TX               | programmable        | yes              | programmable  | IN        |
| EP3RX               | programmable        | yes              | programmable  | OUT       |
| EP3TX               | programmable        | yes              | programmable  | IN        |
| EP4RX               | programmable        | yes              | programmable  | OUT       |
| EP4TX               | programmable        | yes              | programmable  | IN        |
| EP5RX               | programmable        | yes              | programmable  | OUT       |
| EP5TX               | programmable        | yes              | programmable  | IN        |
| EP6RX               | programmable        | yes              | programmable  | OUT       |
| EP6TX               | programmable        | yes              | programmable  | IN        |
| EP7RX               | programmable        | yes              | programmable  | OUT       |
| EP7TX               | programmable        | yes              | programmable  | IN        |

The ISP1582 operates on a 12 MHz crystal oscillator. An integrated  $40 \times$  PLL clock multiplier generates the internal sampling clock of 480 MHz.

### 7.1 DMA interface, DMA handler and DMA registers

The DMA block can be subdivided into two blocks: DMA handler and DMA interface.

The firmware writes to the DMA Command register to start a DMA transfer (see [Table 44](#)). The handler interfaces to the same FIFO (internal RAM) as used by the USB core. On receiving the DMA command, the DMA handler directs the data from the endpoint FIFO to the external DMA device or from the external DMA device to the endpoint FIFO.

The DMA interface configures the timing and the DMA handshake. Data can be transferred using either the DIOR and DIOW strobes or by the DACK and DREQ handshakes. DMA configurations are set up by writing to the DMA Configuration register (see [Table 49](#) and [Table 50](#)).

**Remark:** The DMA endpoint buffer length must be a multiple of 4 bytes.

For details on DMA registers, see [Section 8.4](#).

### 7.2 Hi-Speed USB transceiver

The analog transceiver directly interfaces to the USB cable through integrated termination resistors. The high-speed transceiver requires an external resistor ( $12.0 \text{ k}\Omega \pm 1 \%$ ) between pin RREF and ground to ensure an accurate current mirror that generates the Hi-Speed USB current drive. A full-speed transceiver is integrated as well. This makes the ISP1582 compliant to Hi-Speed USB and Original USB, supporting both the high-speed and full-speed physical layers. After automatic speed detection, the ST-NXP Wireless Serial Interface Engine (SIE) sets the transceiver to use either high-speed or full-speed signaling.

### 7.3 MMU and integrated RAM

The Memory Management Unit (MMU) manages the access to the integrated RAM that is shared by the USB, microcontroller handler and DMA handler. Data from the USB bus is stored in the integrated RAM, which is cleared only when the microcontroller has read the corresponding endpoint, or the DMA controller has written all data from the RAM of the corresponding endpoint to the DMA bus. The OUT endpoint buffer can also be forcibly cleared by setting bit CLBUF in the Control Function register. A total of 8 kB RAM is available for buffering.

### 7.4 Microcontroller interface and microcontroller handler

The microcontroller handler allows the external microcontroller or microprocessor to access the register set in the ST-NXP Wireless SIE, as well as the DMA handler. The initialization of the DMA configuration is done through the microcontroller handler.

### 7.5 OTG SRP module

The OTG supplement defines a Session Request Protocol (SRP), which allows a B-device to request the A-device to turn on  $V_{\text{BUS}}$  and start a session. This protocol allows the A-device, which may be battery-powered, to conserve power by turning off  $V_{\text{BUS}}$  when there is no bus activity while still providing a means for the B-device to initiate bus activity.

Any A-device, including a PC or laptop, can respond to SRP. Any B-device, including a standard USB peripheral, can initiate SRP.

The ISP1582 is a device that can initiate SRP.

## 7.6 ST-NXP Wireless high-speed transceiver

### 7.6.1 ST-NXP Wireless Parallel Interface Engine (PIE)

In the High-Speed (HS) transceiver, the ST-NXP Wireless PIE interface uses a 16-bit parallel bidirectional data interface. The functions of the HS module also include bit-stuffing or de-stuffing and Non-Return-to-Zero Inverted (NRZI) encoding or decoding logic.

### 7.6.2 Peripheral circuit

To maintain a constant current driver for HS transmit circuits and to bias other analog circuits, an internal band gap reference circuit and an RREF resistor form the reference current. This circuit requires an external precision resistor ( $12.0\text{ k}\Omega \pm 1\%$ ) connected to the analog ground.

### 7.6.3 HS detection

The ISP1582 handles more than one electrical state, Full-Speed (FS) or High-Speed (HS), under the USB specification. When the USB cable is connected from the peripheral to the host controller, the ISP1582 defaults to the FS state, until it sees a bus reset from the host controller.

During the bus reset, the peripheral initiates an HS chirp to detect whether the host controller supports Hi-Speed USB or Original USB. If the HS handshake shows that there is an HS host connected, then the ISP1582 switches to the HS state.

In the HS state, the ISP1582 must observe the bus for periodic activity. If the bus remains inactive for 3 ms, the peripheral switches to the FS state to check for a Single-Ended Zero (SE0) condition on the USB bus. If an SE0 condition is detected for the designated time (100  $\mu\text{s}$  to 875  $\mu\text{s}$ ; refer to [Ref. 1 "Universal Serial Bus Specification Rev. 2.0"](#), Section 7.1.7.6), the ISP1582 switches to the HS chirp state to perform an HS detection handshake. Otherwise, the ISP1582 remains in the FS state, adhering to the bus-suspend specification.

### 7.6.4 Isolation

Ensure that the DP and DM lines are maintained in a clean state, without any residual voltage or glitches. Once the ISP1582 is reset and the clock is available, ensure that there are no erroneous pulses or glitches even of very small amplitude on the DP and DM lines.

**Remark:** If there are any erroneous unwanted pulses or glitches detected by the ISP1582 DP and DM lines, there is a possibility of the ISP1582 clocking this state into the internal core, causing unknown behaviors.

7.7 ST-NXP Wireless Serial Interface Engine (SIE)

The ST-NXP Wireless SIE implements the full USB protocol layer. It is completely hardwired for speed and needs no firmware intervention. The functions of this block include: synchronization pattern recognition, parallel or serial conversion, bit-stuffing or de-stuffing, CRC checking or generation, Packet IDentifier (PID) verification or generation, address recognition, handshake evaluation or generation.

7.8 SoftConnect

The USB connection is established by pulling pin DP (for full-speed devices) to HIGH through a 1.5 kΩ pull-up resistor. In the ISP1582, an external 1.5 kΩ pull-up resistor must be connected between pin RPU and 3.3 V. Pin RPU connects the pull-up resistor to pin DP, when bit SOFTCT in the Mode register is set (see [Table 18](#) and [Table 19](#)). After a hardware reset, the pull-up resistor is disconnected by default (bit SOFTCT = 0). The USB bus reset does not change the value of bit SOFTCT.

When V<sub>BUS</sub> is not present, the SOFTCT bit must be set to logic 0 to comply with the back-drive voltage.

7.9 Reconfiguring endpoints

The ISP1582 endpoints have a limitation when implementing a composite device with at least two functionalities that require the support of alternate settings, for example, the video class and audio class devices. The ISP1582 endpoints cannot be reconfigured on the fly because it is implemented as a FIFO base. The internal RAM partition will be corrupted if there is a need to reconfigure endpoints on the fly because of alternate settings request, causing data corruption.

For details and workaround, refer to [Ref. 3 “Using ISP1582/3 in a composite device application with alternate settings \(AN10071\)”](#).

7.10 System controller

The system controller implements the USB power-down capabilities of the ISP1582. Registers are protected against data corruption during wake-up following a resume (from the suspend state) by locking the write access, until an unlock code is written in the Unlock Device register (see [Table 69](#) and [Table 70](#)).

7.11 Pins status

[Table 4](#) illustrates the behavior of ISP1582 pins with V<sub>CC(I/O)</sub> and V<sub>CC</sub> in various operating conditions.

Table 4. ISP1582 pin status

| V <sub>CC</sub> | V <sub>CC(I/O)</sub> | State               | Pin                                    |         |                                            |
|-----------------|----------------------|---------------------|----------------------------------------|---------|--------------------------------------------|
|                 |                      |                     | Input                                  | Output  | I/O                                        |
| 0 V             | 0 V                  | dead <sup>[1]</sup> | unknown                                | unknown | unknown                                    |
| 3.3 V           | V <sub>CC</sub>      | reset               | state depends on how the pin is driven | output  | high-Z                                     |
| 3.3 V           | V <sub>CC</sub>      | after reset         | state depends on how the pin is driven | output  | state depends on how the pin is configured |

[1] Dead: The USB cable is plugged out, and V<sub>CC(I/O)</sub> is not available.

[Table 5](#) illustrates the behavior of output pins with  $V_{CC(I/O)}$  and  $V_{CC}$  in various operating conditions.

**Table 5. ISP1582 output status**

| $V_{CC}$ | $V_{CC(I/O)}$ | State               | INT              | SUSPEND          |
|----------|---------------|---------------------|------------------|------------------|
| 0 V      | 0 V           | dead <sup>[1]</sup> | X <sup>[2]</sup> | X <sup>[2]</sup> |
| 3.3 V    | $V_{CC}$      | reset               | HIGH             | LOW              |
| 3.3 V    | $V_{CC}$      | after reset         | HIGH             | LOW              |

[1] Dead: The USB cable is plugged out, and  $V_{CC(I/O)}$  is not available.

[2] X: Don't care.

## 7.12 Interrupt

### 7.12.1 Interrupt output pin

The Interrupt Configuration register of the ISP1582 controls the behavior of the INT output pin. The polarity and signaling mode of pin INT can be programmed by setting bits INTPOL and INTLVL of the Interrupt Configuration register (R/W: 10h); see [Table 22](#). Bit GLINTENA of the Mode register (R/W: 0Ch) is used to enable pin INT. Default settings after reset are active LOW and level mode. When pulse mode is selected, a pulse of 60 ns is generated when the OR-ed combination of all interrupt bits changes from logic 0 to logic 1.

[Figure 3](#) shows the relationship between interrupt events and pin INT.

Each of the indicated USB and DMA events is logged in a status bit of the Interrupt register and the DMA Interrupt Reason register, respectively. Corresponding bits in the Interrupt Enable register and the DMA Interrupt Enable register determine whether an event will generate an interrupt.

Interrupts can be masked globally by means of bit GLINTENA of the Mode register; see [Table 19](#).

Field CDBGMOD[1:0] of the Interrupt Configuration register controls the generation of INT signals for the control pipe. Field DDBGMODIN[1:0] of the Interrupt Configuration register controls the generation of INT signals for the IN pipe. Field DDBGMODOUT[1:0] of the Interrupt Configuration register controls the generation of INT signals for the OUT pipe; see [Table 23](#).

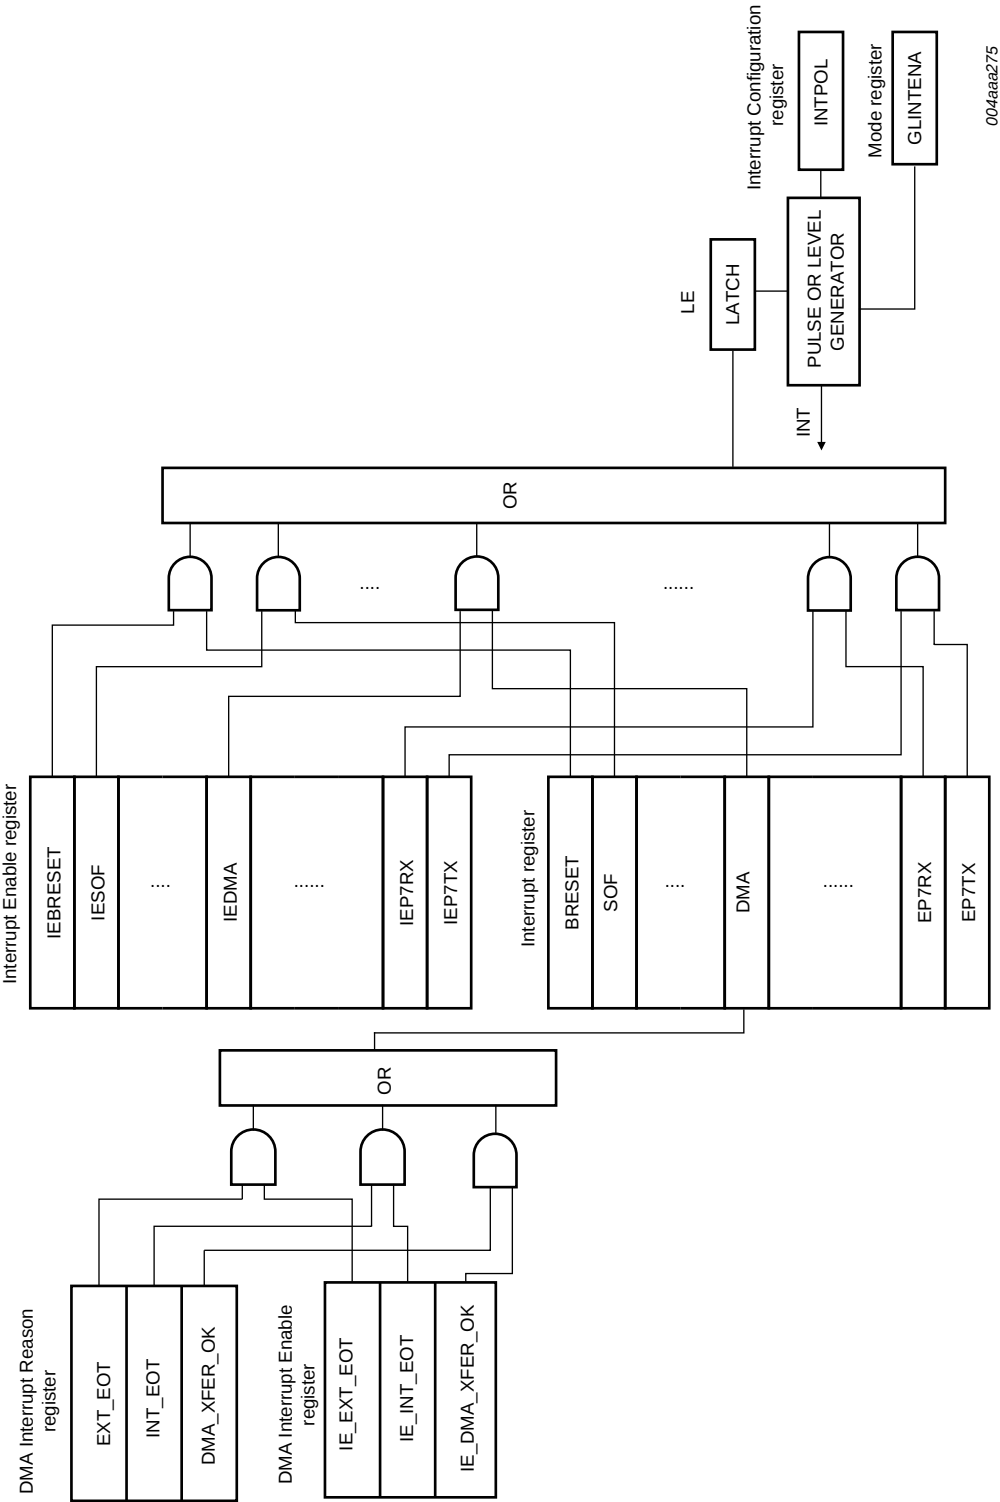


Fig 3. Interrupt logic

### 7.12.2 Interrupt control

Bit GLINTENA in the Mode register is a global interrupt enable or disable bit. The behavior of this bit is given in [Figure 4](#).

The following illustrations are only applicable for level trigger.

Event A: When an interrupt event occurs (for example, SOF interrupt) with bit GLINTENA set to logic 0, an interrupt will not be generated at pin INT. It will, however, be registered in the corresponding Interrupt register bit.


Event B: When bit GLINTENA is set to logic 1, pin INT is asserted because bit SOF in the Interrupt register is already set.

Event C: If the firmware sets bit GLINTENA to logic 0, pin INT will still be asserted. The bold line shows the desired behavior of pin INT.

Deassertion of pin INT can be achieved either by clearing all the bits in the Interrupt register or the DMA Interrupt Reason register, depending on the event.

**Remark:** When clearing an interrupt event, perform write to all the bytes of the register.




For more information on interrupt control, see [Section 8.2.2](#), [Section 8.2.5](#) and [Section 8.5.1](#).

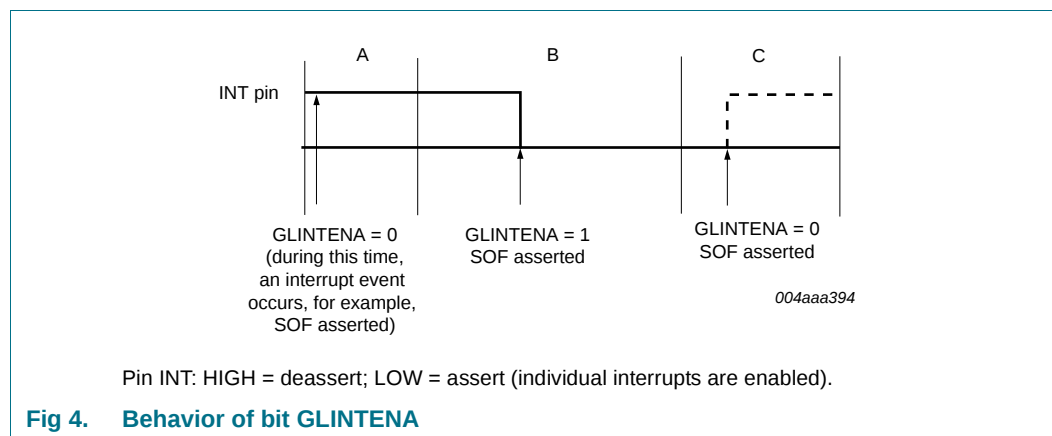

### 7.13 V<sub>BUS</sub> sensing

The V<sub>BUS</sub> pin is one of the ways to wake up the clock when the ISP1582 is suspended with bit CLKAON set to logic 0 (clock off option).

To detect whether the host is connected or not, that is V<sub>BUS</sub> sensing, a 1 MΩ resistor and a 1 μF electrolytic or tantalum capacitor must be added to damp the overshoot on plug-in.

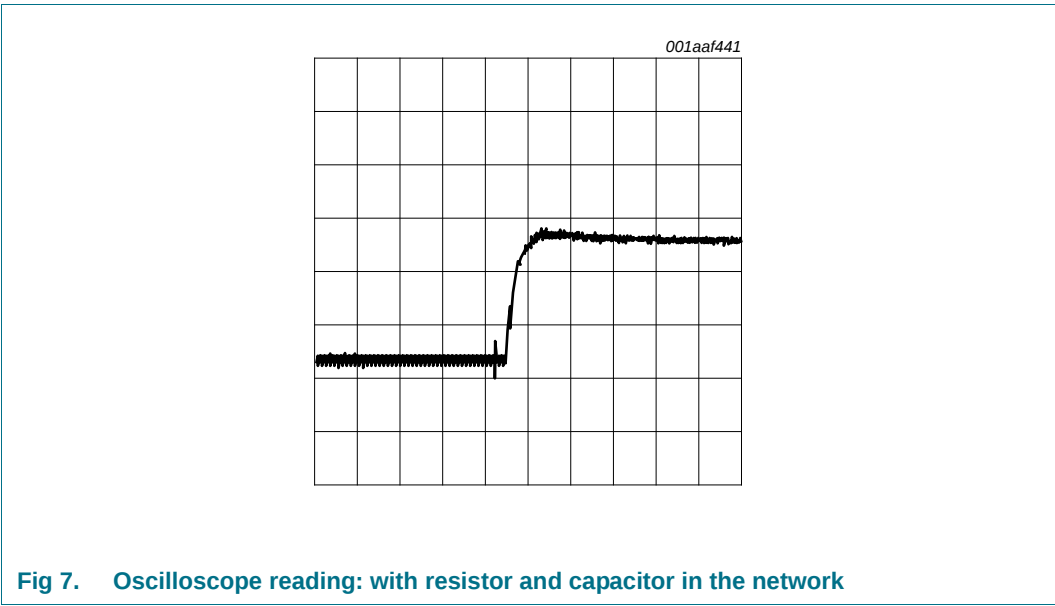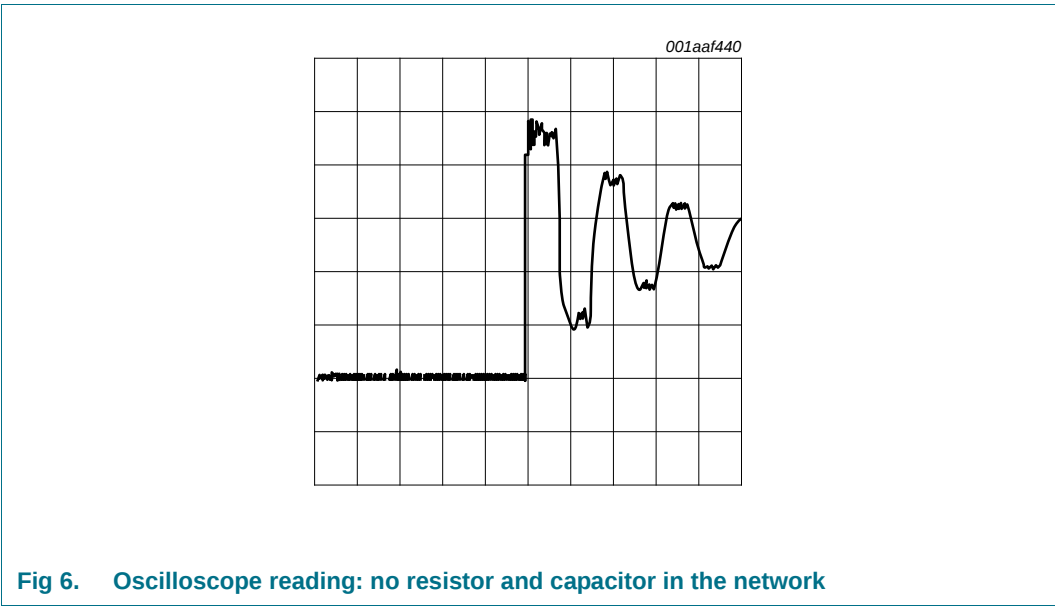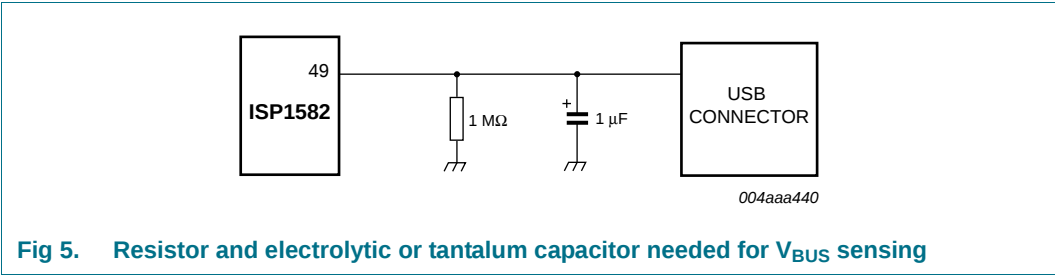

7.14 Power-on reset

The ISP1582 requires a minimum pulse width of 500 μs.

The RESET\_N pin can either be connected to  $V_{CC}$  (using the internal POR circuit) or externally controlled (by the microcontroller, ASIC, and so on). When  $V_{CC}$  is directly connected to the RESET\_N pin, the internal pulse width  $t_{PORP}$  will typically be 200 ns.


The power-on reset function can be explained by viewing the dips at t2 to t3 and t4 to t5 on the  $V_{CC(POR)}$  curve ([Figure 8](#)).

**t0** — The internal POR starts with a HIGH level.


**t1** — The detector will see the passing of the trip level and a delay element will add another  $t_{PORP}$  before it drops to LOW.

**t2-t3** — The internal POR pulse will be generated whenever  $V_{CC(POR)}$  drops below  $V_{trip}$  for more than 11  $\mu s$ .

**t4-t5** — The dip is too short ( $< 11 \mu s$ ) and the internal POR pulse will not react and will remain LOW.

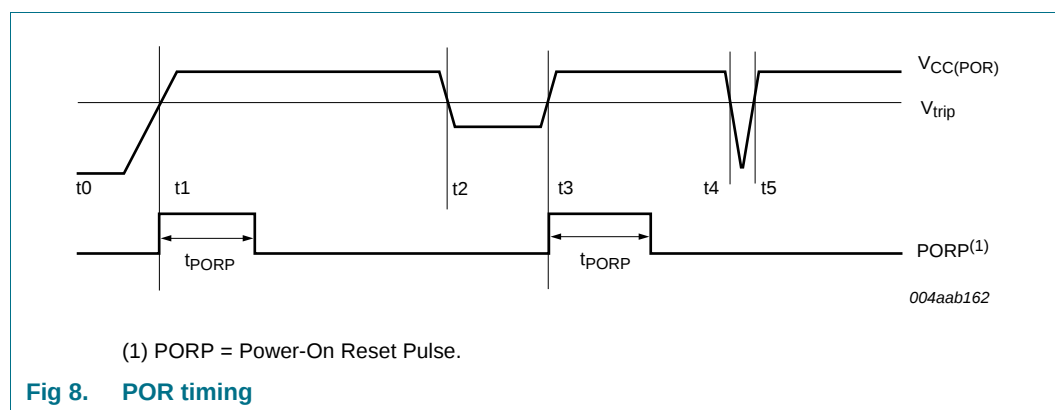

[Figure 9](#) shows the availability of the clock with respect to the external POR.

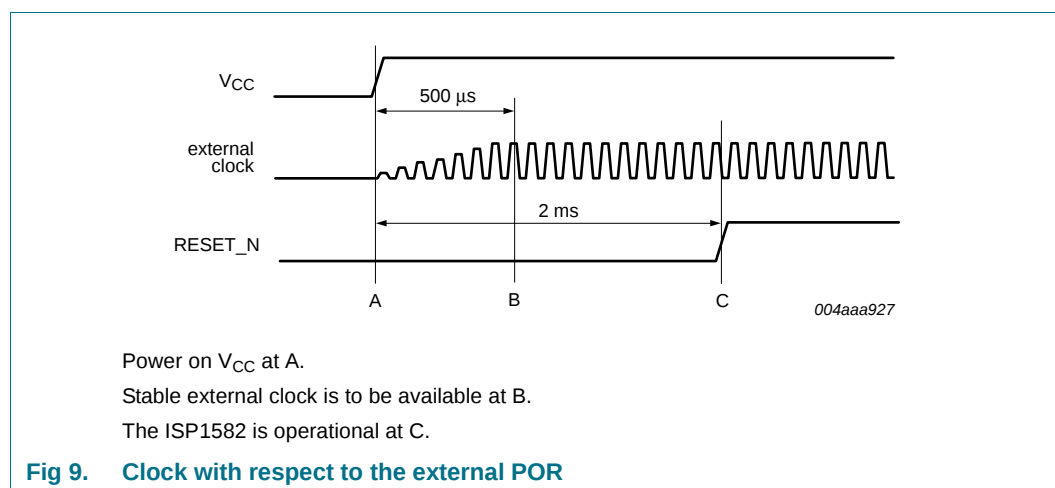

### 7.15 Power supply

The ISP1582 can be powered by  $3.3 V \pm 0.3 V$ . For connection details, see [Figure 10](#).

If the ISP1582 is powered by  $V_{CC} = 3.3 V$ , an integrated 3.3 V-to-1.8 V voltage regulator provides a 1.8 V supply voltage for the internal logic.

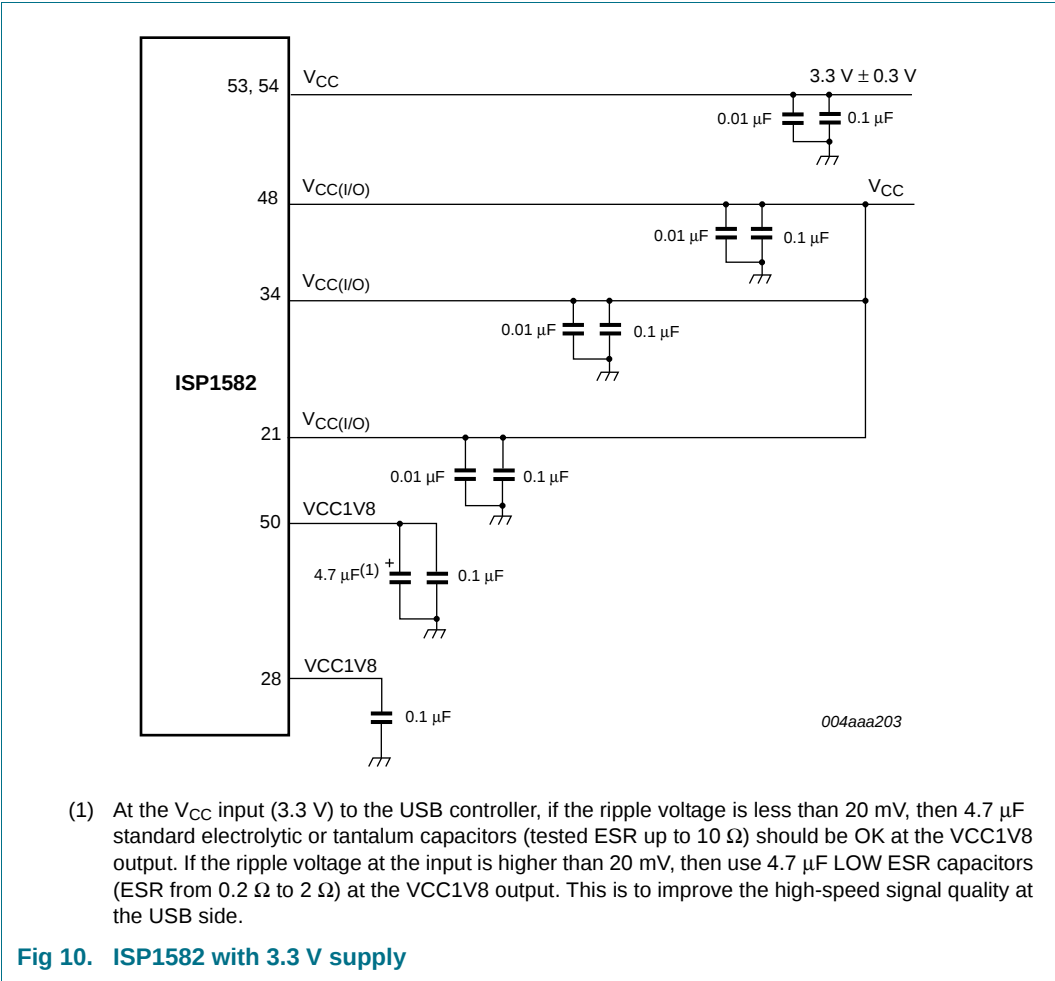


Table 6 shows power modes in which the ISP1582 can be operated.


Table 6. Power modes

| V <sub>CC</sub>                 | V <sub>CC(I/O)</sub>            | Power mode   |
|---------------------------------|---------------------------------|--------------|
| V <sub>BUS</sub> <sup>[1]</sup> | V <sub>BUS</sub> <sup>[2]</sup> | bus-powered  |
| System-powered                  | system-powered                  | self-powered |

[1] The power supply to the IC ( $V_{CC}$ ) is 3.3 V. Therefore, if the application is bus-powered, a 3.3 V regulator must be used.

[2]  $V_{CC(I/O)} = V_{CC}$ . If the application is bus-powered, a voltage regulator must be used.

7.15.1 Self-powered mode

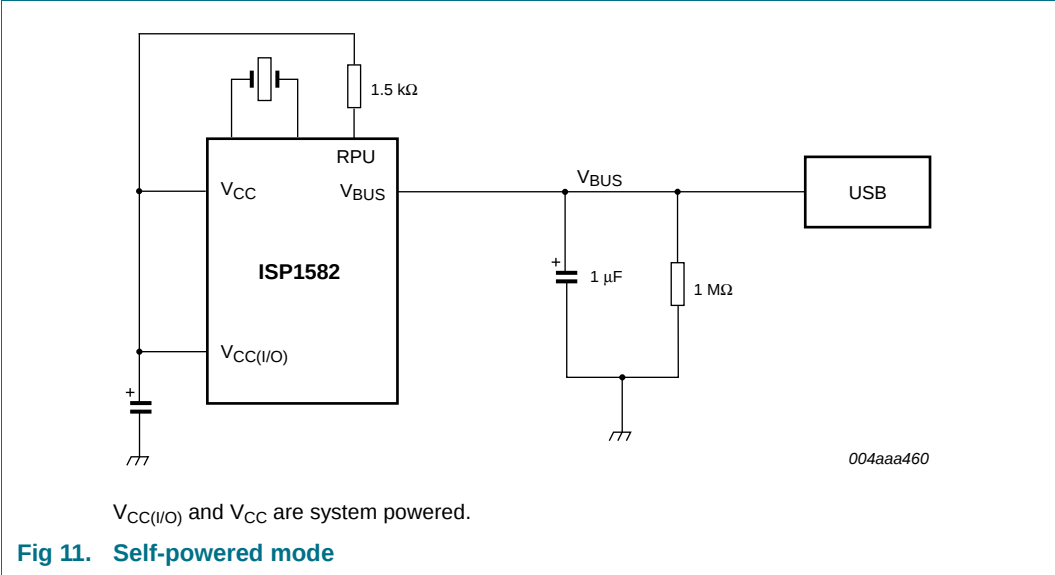

In self-powered mode, V<sub>CC</sub> and V<sub>CC(I/O)</sub> are supplied by the system. See [Figure 11](#).

Table 7. Operation truth table for SoftConnect

| ISP1582 operation    | Power supply    |                      |             |                    | Bit SOFTCT in Mode register |
|----------------------|-----------------|----------------------|-------------|--------------------|-----------------------------|
|                      | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub>   |                             |
| Normal bus operation | 3.3 V           | 3.3 V                | 3.3 V       | 5 V                | enabled                     |
| No pull-up on DP     | 3.3 V           | 3.3 V                | 3.3 V       | 0 V <sup>[1]</sup> | disabled                    |

[1] When the USB cable is removed, SoftConnect is disabled.

Table 8. Operation truth table for clock off during suspend

| ISP1582 operation                                                       | Power supply    |                      |             |                  | Clock off during suspend |
|-------------------------------------------------------------------------|-----------------|----------------------|-------------|------------------|--------------------------|
|                                                                         | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                          |
| Clock will wake up:<br>After resume and<br>After a bus reset            | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | enabled                  |
| Clock will wake up:<br>After detecting the presence of V <sub>BUS</sub> | 3.3 V           | 3.3 V                | 3.3 V       | 0 V → 5 V        | enabled                  |

Table 9. Operation truth table for back voltage compliance

| ISP1582 operation                                                                                           | Power supply    |                      |             |                  | Bit SOFTCT in Mode register |
|-------------------------------------------------------------------------------------------------------------|-----------------|----------------------|-------------|------------------|-----------------------------|
|                                                                                                             | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                             |
| Back voltage is not measured in this mode                                                                   | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | enabled                     |
| Back voltage is not an issue because pull up on DP will not be present when V <sub>BUS</sub> is not present | 3.3 V           | 3.3 V                | 3.3 V       | 0 V              | disabled                    |

Table 10. Operation truth table for OTG

| ISP1582 operation     | Power supply    |                      |             |                  | OTG register   |
|-----------------------|-----------------|----------------------|-------------|------------------|----------------|
|                       | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                |
| SRP is not applicable | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | not applicable |
| SRP is possible       | 3.3 V           | 3.3 V                | 3.3 V       | 0 V              | operational    |

7.15.2 Bus-powered mode

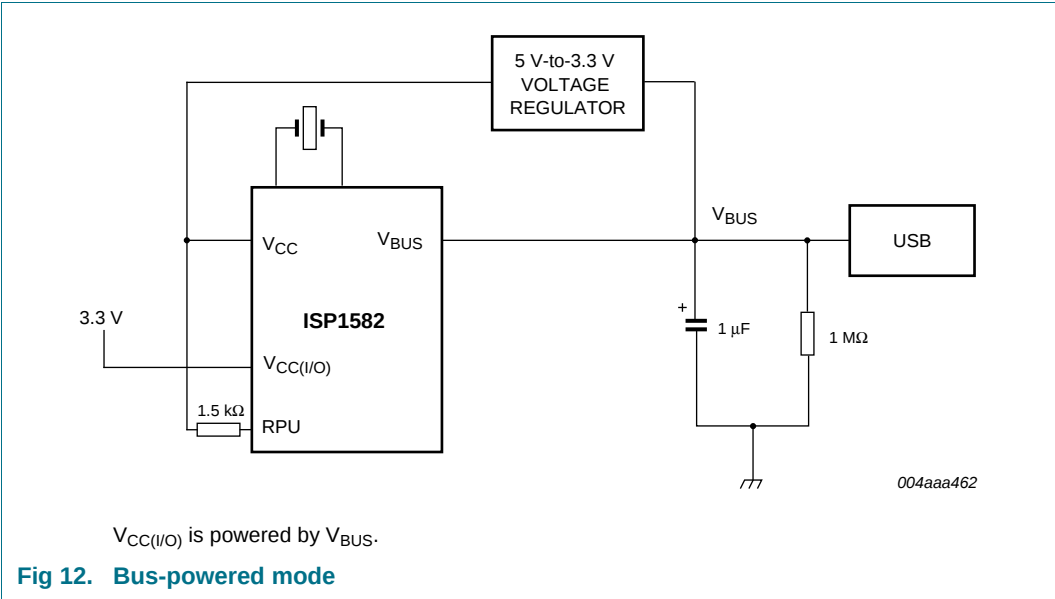


Fig 12. Bus-powered mode

In bus-powered mode (see [Figure 12](#)), V<sub>CC</sub> and V<sub>CC(I/O)</sub> are supplied by the output of the 5 V-to-3.3 V voltage regulator. The input to the regulator is from V<sub>BUS</sub>. On plugging the USB cable, the ISP1582 goes through the power-on reset cycle. In this mode, OTG is disabled.

Table 11. Operation truth table for SoftConnect

| ISP1582 operation    | Power supply    |                      |             |                  | Bit SOFTCT in Mode register |
|----------------------|-----------------|----------------------|-------------|------------------|-----------------------------|
|                      | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                             |
| Normal bus operation | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | enabled                     |
| Power loss           | 0 V             | 0 V                  | 0 V         | 0 V              | not applicable              |

Table 12. Operation truth table for clock off during suspend

| ISP1582 operation                                            | Power supply    |                      |             |                  | Clock off during suspend |
|--------------------------------------------------------------|-----------------|----------------------|-------------|------------------|--------------------------|
|                                                              | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                          |
| Clock will wake up:<br>After resume and<br>After a bus reset | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | enabled                  |
| Power loss                                                   | 0 V             | 0 V                  | 0 V         | 0 V              | not applicable           |

Table 13. Operation truth table for back voltage compliance

| ISP1582 operation                         | Power supply    |                      |             |                  | Bit SOFTCT in Mode register |
|-------------------------------------------|-----------------|----------------------|-------------|------------------|-----------------------------|
|                                           | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                             |
| Back voltage is not measured in this mode | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | enabled                     |
| Power loss                                | 0 V             | 0 V                  | 0 V         | 0 V              | not applicable              |

Table 14. Operation truth table for OTG

| ISP1582 operation     | Power supply    |                      |             |                  | OTG register   |
|-----------------------|-----------------|----------------------|-------------|------------------|----------------|
|                       | V <sub>CC</sub> | V <sub>CC(I/O)</sub> | RPU (3.3 V) | V <sub>BUS</sub> |                |
| SRP is not applicable | 3.3 V           | 3.3 V                | 3.3 V       | 5 V              | not applicable |
| Power loss            | 0 V             | 0 V                  | 0 V         | 0 V              | not applicable |

## 8. Register description

Table 15. Register overview

| Name                            | Destination    | Address | Description                                                        | Size (bytes) | Reference                                |
|---------------------------------|----------------|---------|--------------------------------------------------------------------|--------------|------------------------------------------|
| <b>Initialization registers</b> |                |         |                                                                    |              |                                          |
| Address                         | device         | 00h     | USB device address and enable                                      | 1            | <a href="#">Section 8.2.1 on page 22</a> |
| Mode                            | device         | 0Ch     | power-down options, global interrupt enable, SoftConnect           | 2            | <a href="#">Section 8.2.2 on page 23</a> |
| Interrupt Configuration         | device         | 10h     | interrupt sources, trigger mode, output polarity                   | 1            | <a href="#">Section 8.2.3 on page 24</a> |
| OTG                             | device         | 12h     | OTG implementation                                                 | 1            | <a href="#">Section 8.2.4 on page 25</a> |
| Interrupt Enable                | device         | 14h     | interrupt source enabling                                          | 4            | <a href="#">Section 8.2.5 on page 27</a> |
| <b>Data flow registers</b>      |                |         |                                                                    |              |                                          |
| Endpoint Index                  | endpoints      | 2Ch     | endpoint selection, data flow direction                            | 1            | <a href="#">Section 8.3.1 on page 29</a> |
| Control Function                | endpoint       | 28h     | endpoint buffer management                                         | 1            | <a href="#">Section 8.3.2 on page 30</a> |
| Data Port                       | endpoint       | 20h     | data access to endpoint FIFO                                       | 2            | <a href="#">Section 8.3.3 on page 31</a> |
| Buffer Length                   | endpoint       | 1Ch     | packet size counter                                                | 2            | <a href="#">Section 8.3.4 on page 32</a> |
| Buffer Status                   | endpoint       | 1Eh     | buffer status for each endpoint                                    | 1            | <a href="#">Section 8.3.5 on page 33</a> |
| Endpoint MaxPacketSize          | endpoint       | 04h     | maximum packet size                                                | 2            | <a href="#">Section 8.3.6 on page 34</a> |
| Endpoint Type                   | endpoint       | 08h     | selects endpoint type: isochronous, bulk or interrupt              | 2            | <a href="#">Section 8.3.7 on page 35</a> |
| <b>DMA registers</b>            |                |         |                                                                    |              |                                          |
| DMA Command                     | DMA controller | 30h     | controls all DMA transfers                                         | 1            | <a href="#">Section 8.4.1 on page 37</a> |
| DMA Transfer Counter            | DMA controller | 34h     | sets byte count for DMA transfer                                   | 4            | <a href="#">Section 8.4.2 on page 38</a> |
| DMA Configuration               | DMA controller | 38h     | sets GDMA configuration (counter enable, data strobing, bus width) | 2            | <a href="#">Section 8.4.3 on page 39</a> |
| DMA Hardware                    | DMA controller | 3Ch     | endian type, signal polarity for DACK, DREQ, DIOW, DIOR, EOT       | 1            | <a href="#">Section 8.4.4 on page 40</a> |
| DMA Interrupt Reason            | DMA controller | 50h     | shows reason (source) for DMA interrupt                            | 2            | <a href="#">Section 8.4.5 on page 41</a> |
| DMA Interrupt Enable            | DMA controller | 54h     | enables DMA interrupt sources                                      | 2            | <a href="#">Section 8.4.6 on page 42</a> |
| DMA Endpoint                    | DMA controller | 58h     | selects endpoint FIFO, data flow direction                         | 1            | <a href="#">Section 8.4.7 on page 43</a> |
| DMA Burst Counter               | DMA controller | 64h     | DMA burst counter                                                  | 2            | <a href="#">Section 8.4.8 on page 43</a> |

Table 15. Register overview ...continued

| Name                     | Destination | Address | Description                                                                      | Size (bytes) | Reference                                |
|--------------------------|-------------|---------|----------------------------------------------------------------------------------|--------------|------------------------------------------|
| <b>General registers</b> |             |         |                                                                                  |              |                                          |
| Interrupt                | device      | 18h     | shows interrupt sources                                                          | 4            | <a href="#">Section 8.5.1 on page 44</a> |
| Chip ID                  | device      | 70h     | product ID code and hardware version                                             | 3            | <a href="#">Section 8.5.2 on page 46</a> |
| Frame Number             | device      | 74h     | last successfully received Start-Of-Frame: lower byte (byte 0) is accessed first | 2            | <a href="#">Section 8.5.3 on page 46</a> |
| Scratch                  | device      | 78h     | allows save or restore of firmware status during suspend                         | 2            | <a href="#">Section 8.5.4 on page 47</a> |
| Unlock Device            | device      | 7Ch     | re-enables register write access after suspend                                   | 2            | <a href="#">Section 8.5.5 on page 47</a> |
| Test Mode                | PHY         | 84h     | direct setting of the DP and DM states, internal transceiver test (PHY)          | 1            | <a href="#">Section 8.5.6 on page 48</a> |

## 8.1 Register access

The ISP1582 uses a 16-bit bus access. For single-byte registers, the upper byte (MSByte) must be ignored.

Endpoint specific registers are indexed using the Endpoint Index register. The target endpoint must be selected before accessing the following registers:

- Buffer length
- Buffer status
- Control function
- Data port
- Endpoint MaxPacketSize
- Endpoint type

**Remark:** Write zero to all reserved bits, unless otherwise specified.

## 8.2 Initialization registers

### 8.2.1 Address register (address: 00h)

This register sets the USB assigned address and enables the USB device. [Table 16](#) shows the Address register bit allocation.

Bits DEVADDR[6:0] will be cleared whenever a bus reset, a power-on reset or a soft reset occurs. Bit DEVEN will be cleared whenever a power-on reset or a soft reset occurs.

In response to the standard USB request SET\_ADDRESS, firmware must write the (enabled) device address to the Address register, followed by sending an empty packet to the host. The new device address is activated when the device receives an acknowledgment from the host for the empty packet token.

Table 16. Address register: bit allocation

| Bit       | 7         | 6            | 5   | 4   | 3   | 2   | 1   | 0   |
|-----------|-----------|--------------|-----|-----|-----|-----|-----|-----|
| Symbol    | DEVEN     | DEVADDR[6:0] |     |     |     |     |     |     |
| Reset     | 0         | 0            | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | unchanged | 0            | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W       | R/W          | R/W | R/W | R/W | R/W | R/W | R/W |

Table 17. Address register: bit description

| Bit    | Symbol        | Description                                                                                                        |
|--------|---------------|--------------------------------------------------------------------------------------------------------------------|
| 7      | DEVEN         | <b>Device Enable:</b> Logic 1 enables the device. The device will not respond to the host, unless this bit is set. |
| 6 to 0 | DEVADDR [6:0] | <b>Device Address:</b> This field specifies the USB device address.                                                |

### 8.2.2 Mode register (address: 0Ch)

This register consists of 2 bytes (bit allocation: see [Table 18](#)).

The Mode register controls resume, suspend and wake-up behavior, interrupt activity, soft reset, clock signals and SoftConnect operation.

Table 18. Mode register: bit allocation

| Bit       | 15        | 14     | 13     | 12      | 11        | 10     | 9         | 8         |
|-----------|-----------|--------|--------|---------|-----------|--------|-----------|-----------|
| Symbol    | reserved  |        |        |         |           |        | DMA CLKON | VBUSSTAT  |
| Reset     | -         | -      | -      | -       | -         | -      | 0         | -[1]      |
| Bus reset | -         | -      | -      | -       | -         | -      | 0         | -[1]      |
| Access    | R         | R      | R      | R       | R         | R      | R/W       | R         |
| Bit       | 7         | 6      | 5      | 4       | 3         | 2      | 1         | 0         |
| Symbol    | CLKAON    | SNDRSU | GOSUSP | SFRESET | GLINTENA  | WKUPCS | PWRON     | SOFTCT    |
| Reset     | 0         | 0      | 0      | 0       | 0         | 0      | 0         | 0         |
| Bus reset | unchanged | 0      | 0      | 0       | unchanged | 0      | unchanged | unchanged |
| Access    | R/W       | R/W    | R/W    | R/W     | R/W       | R/W    | R/W       | R/W       |

[1] Value depends on the status of the V<sub>BUS</sub> pin.

Table 19. Mode register: bit description

| Bit      | Symbol   | Description                                                                                                                              |
|----------|----------|------------------------------------------------------------------------------------------------------------------------------------------|
| 15 to 10 | -        | reserved                                                                                                                                 |
| 9        | DMACLKON | <b>DMA Clock On:</b><br>0 — Power save mode; the DMA circuit will stop completely to save power.<br>1 — Supply clock to the DMA circuit. |
| 8        | VBUSSTAT | <b>V<sub>BUS</sub> Pin Status:</b> This bit reflects the V <sub>BUS</sub> pin status.                                                    |

Table 19. Mode register: bit description ...continued

| Bit | Symbol   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CLKAON   | <b>Clock Always On:</b> Logic 1 indicates that internal clocks are always running when in the suspend state. Logic 0 switches off the internal oscillator and PLL when the device goes into suspend mode. The device will consume less power if this bit is set to logic 0. The clock is stopped about 2 ms after bit GOSUSP is set and then cleared.                                                                                                                                                                                                                                                                   |
| 6   | SNDRSU   | <b>Send Resume:</b> Writing logic 1, followed by logic 0 will generate a 10 ms upstream resume signal.<br><b>Remark:</b> The upstream resume signal is generated 5 ms after this bit is set to logic 0.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 5   | GOSUSP   | <b>Go Suspend:</b> Writing logic 1, followed by logic 0 will activate suspend mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 4   | SFRESET  | <b>Soft Reset:</b> Writing logic 1, followed by logic 0 will enable a software-initiated reset to the ISP1582. A soft reset is similar to a hardware-initiated reset (using pin RESET_N).                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 3   | GLINTENA | <b>Global Interrupt Enable:</b> Logic 1 enables all interrupts. Individual interrupts can be masked by clearing the corresponding bits in the Interrupt Enable register.<br>When this bit is not set, an unmasked interrupt will not generate an interrupt trigger on the interrupt pin. If global interrupt, however, is enabled while there is any pending unmasked interrupt, an interrupt signal will be immediately generated on the interrupt pin. (If the interrupt is set to pulse mode, the interrupt events that were generated before the global interrupt is enabled will not appear on the interrupt pin). |
| 2   | WKUPCS   | <b>Wake Up On Chip Select:</b> Logic 1 enables wake-up from suspend mode through a valid register read on the ISP1582. (A read will invoke the chip clock to restart. If you write to the register before the clock gets stable, it may cause malfunctioning).                                                                                                                                                                                                                                                                                                                                                          |
| 1   | PWRON    | <b>Power On:</b> The SUSPEND pin output control.<br><b>0</b> — The SUSPEND pin is HIGH when the ISP1582 is in the suspend state. Otherwise, the SUSPEND pin is LOW.<br><b>1</b> — When the device is woken up from the suspend state, there will be a 1 ms active HIGH pulse on the SUSPEND pin. The SUSPEND pin will remain LOW in all other states.                                                                                                                                                                                                                                                                   |
| 0   | SOFTCT   | <b>SoftConnect:</b> Logic 1 enables the connection of the 1.5 kΩ pull-up resistor on pin RPU to the DP pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

The status of the chip is shown in [Table 20](#).

Table 20. Status of the chip

| V <sub>BUS</sub> | SoftConnect = on                                                                                    | SoftConnect = off                                                                                   |
|------------------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| On               | pull-up resistor on pin DP                                                                          | pull-up resistor on pin DP is removed; suspend interrupt is generated after 3 ms of no bus activity |
| Off              | pull-up resistor on pin DP is present; suspend interrupt is generated after 3 ms of no bus activity | pull-up resistor on pin DP is removed; suspend interrupt is generated after 3 ms of no bus activity |

### 8.2.3 Interrupt Configuration register (address: 10h)

This 1-byte register determines the behavior and polarity of the INT output. The bit allocation is shown in [Table 21](#). When the USB SIE receives or generates an ACK, NAK or NYET, it will generate interrupts, depending on three Debug mode fields.

**CDBGMOD[1:0]** — Interrupts for control endpoint 0

**DDBGMODIN[1:0]** — Interrupts for DATA IN endpoints 1 to 7

**DDBGMODOUT[1:0]** — Interrupts for DATA OUT endpoints 1 to 7

The Debug mode settings for CDBGMOD, DDBGMODIN and DDBGMODOUT allow you to individually configure when the ISP1582 sends an interrupt to the external microprocessor. [Table 23](#) lists the available combinations.

Bit INTPOL controls the signal polarity of the INT output: active HIGH or LOW, rising or falling edge. For level-triggering, bit INTLVL must be made logic 0. By setting INTLVL to logic 1, an interrupt will generate a pulse of 60 ns (edge-triggering).

**Table 21. Interrupt Configuration register: bit allocation**

| Bit              | 7            | 6   | 5              | 4   | 3               | 2   | 1         | 0         |
|------------------|--------------|-----|----------------|-----|-----------------|-----|-----------|-----------|
| <b>Symbol</b>    | CDBGMOD[1:0] |     | DDBGMODIN[1:0] |     | DDBGMODOUT[1:0] |     | INTLVL    | INTPOL    |
| <b>Reset</b>     | 1            | 1   | 1              | 1   | 1               | 1   | 0         | 0         |
| <b>Bus reset</b> | 1            | 1   | 1              | 1   | 1               | 1   | unchanged | unchanged |
| <b>Access</b>    | R/W          | R/W | R/W            | R/W | R/W             | R/W | R/W       | R/W       |

**Table 22. Interrupt Configuration register: bit description**

| Bit    | Symbol          | Description                                                                                                                                               |
|--------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 6 | CDBGMOD[1:0]    | <b>Control Endpoint 0 Debug Mode:</b> For values, see <a href="#">Table 23</a>                                                                            |
| 5 to 4 | DDBGMODIN[1:0]  | <b>Data Debug Mode IN:</b> For values, see <a href="#">Table 23</a>                                                                                       |
| 3 to 2 | DDBGMODOUT[1:0] | <b>Data Debug Mode OUT:</b> For values, see <a href="#">Table 23</a>                                                                                      |
| 1      | INTLVL          | <b>Interrupt Level:</b> Selects signaling mode on output INT ( <b>0</b> = level; <b>1</b> = pulsed). In pulsed mode, an interrupt produces a 60 ns pulse. |
| 0      | INTPOL          | <b>Interrupt Polarity:</b> Selects signal polarity on output INT ( <b>0</b> = active LOW; <b>1</b> = active HIGH).                                        |

**Table 23. Debug mode settings**

| Value | CDBGMOD                                           | DDBGMODIN                                         | DDBGMODOUT                                              |
|-------|---------------------------------------------------|---------------------------------------------------|---------------------------------------------------------|
| 00h   | interrupt on all ACK and NAK                      | interrupt on all ACK and NAK                      | interrupt on all ACK, NYET and NAK                      |
| 01h   | interrupt on all ACK                              | interrupt on ACK                                  | interrupt on ACK and NYET                               |
| 1Xh   | interrupt on all ACK and first NAK <sup>[1]</sup> | interrupt on all ACK and first NAK <sup>[1]</sup> | interrupt on all ACK, NYET and first NAK <sup>[1]</sup> |

[1] First NAK: the first NAK on an IN or OUT token is generated after a set-up token and an ACK sequence.

## 8.2.4 OTG register (address: 12h)

The bit allocation of the OTG register is given in [Table 24](#).

**Table 24. OTG register: bit allocation**

| Bit              | 7        | 6 | 5   | 4          | 3        | 2     | 1   | 0   |
|------------------|----------|---|-----|------------|----------|-------|-----|-----|
| <b>Symbol</b>    | reserved |   | DP  | BSESSVALID | INITCOND | DISCV | VP  | OTG |
| <b>Reset</b>     | -        | - | 0   | -          | -        | 0     | 0   | 0   |
| <b>Bus reset</b> | -        | - | 0   | -          | -        | 0     | 0   | 0   |
| <b>Access</b>    | -        | - | R/W | R/W        | R/W      | R/W   | R/W | R/W |

Table 25. OTG register: bit description

| Bit    | Symbol         | Description <sup>[1][2][3]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 6 | -              | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 5      | DP             | <b>Data Pulsing:</b> Used for data-line pulsing to toggle DP to generate the required data-line pulsing signal. The default value of this bit is logic 0. This bit must be cleared when data-line pulsing is completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 4      | BSESS<br>VALID | <p><b>B-Session Valid:</b> The device can initiate another <math>V_{BUS}</math> discharge sequence after data-line pulsing and <math>V_{BUS}</math> pulsing, and before it clears this bit and detects a session valid.</p> <p>This bit is latched to logic 1 once <math>V_{BUS}</math> exceeds the B-device session valid threshold. Once set, it remains at logic 1. To clear this bit, write logic 1. (The ISP1582 continuously updates this bit to logic 1 when the B-session is valid. If the B-session is valid after it is cleared, it is set back to logic 1 by the ISP1582).</p> <p><b>0</b> — It implies that SRP has failed. To proceed to a normal operation, the device can restart SRP, clear bit OTG or proceed to an error handling process.</p> <p><b>1</b> — It implies that the B-session is valid. The device clears bit OTG, goes into normal operation mode, and sets bit SOFTCT (DP pull-up) in the Mode register. The OTG host has a maximum of 5 s before it responds to a session request. During this period, the ISP1582 may request to suspend. Therefore, the device firmware must wait for some time if it wishes to know the SRP result (success: if there is minimum response from the host within 5 s; failure; if there is no response from the host within 5 s).</p> |
| 3      | INIT<br>COND   | <p><b>Initial Condition:</b> Write logic 1 to clear this bit. Wait for more than 2 ms and check the bit status. If it reads logic 0, it means that <math>V_{BUS}</math> remains lower than 0.8 V, and DP or DM are at SE0 during the elapsed time. The device can then start a B-device SRP. If it reads logic 1, it means that the initial condition of SRP is violated. So, the device must abort SRP.</p> <p>The bit is set to logic 1 by the ISP1582 when initial conditions are not met, and only writing logic 1 clears the bit. (If initial conditions are not met after this bit has been cleared, it will be set again).</p> <p><b>Remark:</b> This implementation does not cover the case if an initial SRP condition is violated when this bit is read and data-line pulsing is started.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 2      | DISCV          | <b>Discharge <math>V_{BUS}</math>:</b> Set to logic 1 to discharge $V_{BUS}$ . The device discharges $V_{BUS}$ before starting a new SRP. The discharge can take as long as 30 ms for $V_{BUS}$ to be charged less than 0.8 V. This bit must be cleared (write logic 0) before starting a session end detection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 1      | VP             | <b><math>V_{BUS}</math> Pulsing:</b> Used for $V_{BUS}$ pulsing to toggle VP to generate the required $V_{BUS}$ pulsing signal. This bit must be set for more than 16 ms and must be cleared before 26 ms.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 0      | OTG            | <p><b>On-The-Go:</b></p> <p><b>1</b> — Enables the OTG function. The <math>V_{BUS}</math> sensing functionality will be disabled.</p> <p><b>0</b> — Normal operation. All OTG control bits will be masked. Status bits are undefined.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

[1] No interrupt is designed for OTG. The  $V_{BUS}$  interrupt, however, may assert as a side effect during the  $V_{BUS}$  pulsing (see note 2).

[2] When OTG is in progress, the  $V_{BUS}$  interrupt may be set because  $V_{BUS}$  is charged over the  $V_{BUS}$  sensing threshold or the OTG host has turned on the  $V_{BUS}$  supply to the device. Even if the  $V_{BUS}$  interrupt is found during SRP, the device must complete data-line pulsing and  $V_{BUS}$  pulsing before starting the B\_SESSION\_VALID detection.

[3] OTG implementation applies to the device with self-power capability. If the device works in sharing mode, it must provide a switch circuit to supply power to the ISP1582 core during SRP.

#### 8.2.4.1 Session Request Protocol (SRP)

The ISP1582 can initiate an SRP. The B-device initiates SRP by data-line pulsing, followed by  $V_{BUS}$  pulsing. The A-device can detect either data-line pulsing or  $V_{BUS}$  pulsing.

The ISP1582 can initiate the B-device SRP by performing the following steps:

1. Set the OTG bit to start SRP.
2. Detect initial conditions by following the instructions given in bit INITCOND of the OTG register.
3. Start data-line pulsing: set bit DP of the OTG register to logic 1.
4. Wait for 5 ms to 10 ms.
5. Stop data-line pulsing: set bit DP of the OTG register to logic 0.
6. Start  $V_{BUS}$  pulsing: set bit VP of the OTG register to logic 1.
7. Wait for 10 ms to 20 ms.
8. Stop  $V_{BUS}$  pulsing: set bit VP of the OTG register to logic 0.
9. Discharge  $V_{BUS}$  for about 30 ms: optional by using bit DISCV of the OTG register.
10. Detect bit BSESSVALID of the OTG register for a successful SRP with bit OTG cleared.
11. Once bit BSESSVALID is detected, turn on the SOFTCT bit to start normal bus enumeration.

The B-device must complete both data-line pulsing and  $V_{BUS}$  pulsing within 100 ms.

**Remark:** When disabling OTG, data-line pulsing bit DP and  $V_{BUS}$  pulsing bit VP must be cleared by writing logic 0.

#### 8.2.5 Interrupt Enable register (address: 14h)

This register enables or disables individual interrupt sources. The interrupt for each endpoint can individually be controlled using the associated bits IEPnRX or IEPnTX, here n represents the endpoint number. All interrupts can be globally disabled using bit GLINTENA in the Mode register (see [Table 18](#)).

An interrupt is generated when the USB SIE receives or generates an ACK or NAK on the USB bus. The interrupt generation depends on Debug mode settings of bit fields CDBGMOD[1:0], DDBGMODIN[1:0] and DDBGMODOUT[1:0] in the Interrupt Configuration register.

All data IN transactions use the Transmit buffers (TX), which are handled by bits DDBGMODIN[1:0]. All data OUT transactions go through the Receive buffers (RX), which are handled by bits DDBGMODOUT[1:0]. Transactions on control endpoint 0 (IN, OUT and SETUP) are handled by bits CDBGMOD[1:0].

Interrupts caused by events on the USB bus (SOF, suspend, resume, bus reset, set up and high-speed status) can also be individually controlled. A bus reset disables all enabled interrupts, except bit IEBRST (bus reset), which remains logic 1.

The Interrupt Enable register consists of 4 bytes. The bit allocation is given in [Table 26](#).

Table 26. Interrupt Enable register: bit allocation

| Bit       | 31       | 30     | 29       | 28     | 27     | 26     | 25       | 24        |
|-----------|----------|--------|----------|--------|--------|--------|----------|-----------|
| Symbol    | reserved |        |          |        |        |        | IEP7TX   | IEP7RX    |
| Reset     | -        | -      | -        | -      | -      | -      | 0        | 0         |
| Bus reset | -        | -      | -        | -      | -      | -      | 0        | 0         |
| Access    | -        | -      | -        | -      | -      | -      | R/W      | R/W       |
| Bit       | 23       | 22     | 21       | 20     | 19     | 18     | 17       | 16        |
| Symbol    | IEP6TX   | IEP6RX | IEP5TX   | IEP5RX | IEP4TX | IEP4RX | IEP3TX   | IEP3RX    |
| Reset     | 0        | 0      | 0        | 0      | 0      | 0      | 0        | 0         |
| Bus reset | 0        | 0      | 0        | 0      | 0      | 0      | 0        | 0         |
| Access    | R/W      | R/W    | R/W      | R/W    | R/W    | R/W    | R/W      | R/W       |
| Bit       | 15       | 14     | 13       | 12     | 11     | 10     | 9        | 8         |
| Symbol    | IEP2TX   | IEP2RX | IEP1TX   | IEP1RX | IEP0TX | IEP0RX | reserved | IEP0SETUP |
| Reset     | 0        | 0      | 0        | 0      | 0      | 0      | -        | 0         |
| Bus reset | 0        | 0      | 0        | 0      | 0      | 0      | -        | 0         |
| Access    | R/W      | R/W    | R/W      | R/W    | R/W    | R/W    | R/W      | R/W       |
| Bit       | 7        | 6      | 5        | 4      | 3      | 2      | 1        | 0         |
| Symbol    | IEVBUS   | IEDMA  | IEHS_STA | IERESM | IESUSP | IEPSOF | IESOF    | IEBRST    |
| Reset     | 0        | 0      | 0        | 0      | 0      | 0      | 0        | 0         |
| Bus reset | 0        | 0      | 0        | 0      | 0      | 0      | 0        | 1         |
| Access    | R/W      | R/W    | R/W      | R/W    | R/W    | R/W    | R/W      | R/W       |

Table 27. Interrupt Enable register: bit description

| Bit      | Symbol    | Description                                                           |
|----------|-----------|-----------------------------------------------------------------------|
| 31 to 26 | -         | reserved                                                              |
| 25       | IEP7TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 24       | IEP7RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 23       | IEP6TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 22       | IEP6RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 21       | IEP5TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 20       | IEP5RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 19       | IEP4TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 18       | IEP4RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 17       | IEP3TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 16       | IEP3RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 15       | IEP2TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 14       | IEP2RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 13       | IEP1TX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 12       | IEP1RX    | Logic 1 enables interrupt from the indicated endpoint.                |
| 11       | IEP0TX    | Logic 1 enables interrupt from the control IN endpoint 0.             |
| 10       | IEP0RX    | Logic 1 enables interrupt from the control OUT endpoint 0.            |
| 9        | -         | reserved                                                              |
| 8        | IEP0SETUP | Logic 1 enables interrupt for the set-up data received on endpoint 0. |

Table 27. Interrupt Enable register: bit description ...continued

| Bit | Symbol   | Description                                                                      |
|-----|----------|----------------------------------------------------------------------------------|
| 7   | IEVBUS   | Logic 1 enables interrupt for V <sub>BUS</sub> sensing.                          |
| 6   | IEDMA    | Logic 1 enables interrupt on the DMA Interrupt Reason register change detection. |
| 5   | IEHS_STA | Logic 1 enables interrupt on detection of a high-speed status change.            |
| 4   | IERESM   | Logic 1 enables interrupt on detection of a resume state.                        |
| 3   | IESUSP   | Logic 1 enables interrupt on detection of a suspend state.                       |
| 2   | IEPSOF   | Logic 1 enables interrupt on detection of a pseudo SOF.                          |
| 1   | IESOF    | Logic 1 enables interrupt on detection of an SOF.                                |
| 0   | IEBRST   | Logic 1 enables interrupt on detection of a bus reset.                           |

## 8.3 Data flow registers

### 8.3.1 Endpoint Index register (address: 2Ch)

The Endpoint Index register selects a target endpoint for register access by the microcontroller. The register consists of 1 byte, and the bit allocation is shown in [Table 28](#).

The following registers are indexed:

- Buffer length
- Buffer status
- Control function
- Data port
- Endpoint MaxPacketSize
- Endpoint type

For example, to access the OUT data buffer of endpoint 1 using the Data Port register, the Endpoint Index register must be written first with 02h.

**Remark:** The Endpoint Index register and the DMA Endpoint register must not point to the same endpoint, irrespective of IN and OUT.

**Remark:** The delay time from the Write Endpoint Index register to the Read Data Port register must be at least 190 ns.

**Remark:** The delay time from the Write Endpoint Index register to the Write Data Port register must be at least 100 ns.

Table 28. Endpoint Index register: bit allocation

| Bit       | 7        | 6   | 5         | 4            | 3   | 2   | 1   | 0   |
|-----------|----------|-----|-----------|--------------|-----|-----|-----|-----|
| Symbol    | reserved |     | EP0SETUP  | ENDPIDX[3:0] |     |     |     | DIR |
| Reset     | -        | -   | 1         | 0            | 0   | 0   | 0   | 0   |
| Bus reset | -        | -   | unchanged | 0            | 0   | 0   | 0   | 0   |
| Access    | R/W      | R/W | R/W       | R/W          | R/W | R/W | R/W | R/W |

Table 29. Endpoint Index register: bit description

| Bit    | Symbol       | Description                                                                                                                                                                                      |
|--------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 6 | -            | reserved                                                                                                                                                                                         |
| 5      | EP0SETUP     | <b>Endpoint 0 Setup:</b> Selects the SETUP buffer of endpoint 0.<br><b>0</b> — Data buffer<br><b>1</b> — SETUP buffer<br>Must be logic 0 for access to endpoints other than set-up token buffer. |
| 4 to 1 | ENDPIDX[3:0] | <b>Endpoint Index:</b> Selects the target endpoint for register access of buffer length, buffer status, control function, data port, endpoint type and MaxPacketSize.                            |
| 0      | DIR          | <b>Direction:</b> Sets the target endpoint as IN or OUT.<br><b>0</b> — Target endpoint refers to OUT (RX) FIFO<br><b>1</b> — Target endpoint refers to IN (TX) FIFO                              |

Table 30. Addressing of endpoint buffers

| Buffer name | EP0SETUP | ENDPIDX | DIR |
|-------------|----------|---------|-----|
| SETUP       | 1        | 00h     | 0   |
| Control OUT | 0        | 00h     | 0   |
| Control IN  | 0        | 00h     | 1   |
| Data OUT    | 0        | 0Xh     | 0   |
| Data IN     | 0        | 0Xh     | 1   |

### 8.3.2 Control Function register (address: 28h)

The Control Function register performs the buffer management on endpoints. It consists of 1 byte, and the bit configuration is given in [Table 31](#). Register bits can stall, clear or validate any enabled data endpoint. Before accessing this register, the Endpoint Index register must first be written to specify the target endpoint.

Table 31. Control Function register: bit allocation

| Bit       | 7        | 6 | 5 | 4     | 3     | 2    | 1      | 0     |
|-----------|----------|---|---|-------|-------|------|--------|-------|
| Symbol    | reserved |   |   | CLBUF | VENDP | DSEN | STATUS | STALL |
| Reset     | -        | - | - | 0     | 0     | 0    | 0      | 0     |
| Bus reset | -        | - | - | 0     | 0     | 0    | 0      | 0     |
| Access    | -        | - | - | R/W   | R/W   | W    | R/W    | R/W   |

Table 32. Control Function register: bit description

| Bit    | Symbol | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 5 | -      | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4      | CLBUF  | <p><b>Clear Buffer:</b> Logic 1 clears the TX or RX buffer of the indexed endpoint. The RX buffer is automatically cleared once the endpoint is completely read. This bit is set only when it is necessary to forcefully clear the buffer.</p> <p><b>Remark:</b> If using double buffer, to clear both the buffers issue the CLBUF command two times. For details on clearing buffers, refer to <a href="#">Ref. 4</a> "<a href="#">ISP1582/83 and ISP1761 clearing an IN buffer (AN10045)</a>".</p>                                                                                                                                                                                                                                                                                       |
| 3      | VENDP  | <p><b>Validate Endpoint:</b> Logic 1 validates data in the TX FIFO of an IN endpoint to send on the next IN token. In general, the endpoint is automatically validated when its FIFO byte count has reached endpoint MaxPacketSize. This bit is set only when it is necessary to validate the endpoint with the FIFO byte count, which is below endpoint MaxPacketSize.</p> <p><b>Remark:</b> Use either bit VENDP or register Buffer Length to validate endpoint FIFO with FIFO bytes.</p>                                                                                                                                                                                                                                                                                                |
| 2      | DSEN   | <p><b>Data Stage Enable:</b> This bit controls the response of the ISP1582 to a control transfer. After the completion of the set-up stage, firmware must determine whether a data stage is required. For control OUT, firmware will set this bit and the ISP1582 goes into the data stage. Otherwise, the ISP1582 will NAK the data stage transfer. For control IN, firmware will set this bit before writing data to the TX FIFO and validate the endpoint. If no data stage is required, firmware can immediately set the STATUS bit after the set-up stage.</p> <p><b>Remark:</b> The DSEN bit is cleared once the OUT token is acknowledged by the device and the IN token is acknowledged by the PC host. This bit cannot be read back and reading this bit will return logic 0.</p> |
| 1      | STATUS | <p><b>Status Acknowledge:</b> Only applicable for control IN or OUT.</p> <p>This bit controls the generation of ACK or NAK during the status stage of a SETUP transfer. It is automatically cleared when the status stage is completed, or when a SETUP token is received. No interrupt signal will be generated.</p> <p><b>0</b> — Sends NAK</p> <p><b>1</b> — Sends an empty packet following the IN token (peripheral-to-host) or ACK following the OUT token (host-to-peripheral).</p> <p><b>Remark:</b> The STATUS bit is cleared to zero once the zero-length packet is acknowledged by the device or the PC host.</p> <p><b>Remark:</b> Data transfers preceding the status stage must first be fully completed before the STATUS bit can be set.</p>                               |
| 0      | STALL  | <p><b>Stall Endpoint:</b> Logic 1 stalls the indexed endpoint. This bit is not applicable for isochronous transfers.</p> <p><b>Remark:</b> Stalling a data endpoint will confuse the Data Toggle bit about the stalled endpoint because the internal logic picks up from where it is stalled. Therefore, the Data Toggle bit must be reset by disabling and re-enabling the corresponding endpoint (by setting bit ENABLE to logic 0, followed by logic 1 in the Endpoint Type register) to reset the PID.</p>                                                                                                                                                                                                                                                                             |

### 8.3.3 Data Port register (address: 20h)

This 2-byte register provides direct access for a microcontroller to the FIFO of the indexed endpoint. The bit allocation is shown in [Table 33](#).

**Peripheral-to-host (IN endpoint):** After each write action, an internal counter is auto incremented by two to the next location in the TX FIFO. When all bytes are written (FIFO byte count = endpoint MaxPacketSize), the buffer is automatically validated. The data packet will then be sent on the next IN token. When it is necessary to validate the endpoint whose byte count is less than MaxPacketSize, it can be done using the Control Function register (bit VENDP) or the Buffer Length register.

**Remark:** The buffer can automatically be validated by using the Buffer Length register (see [Table 35](#)).

**Host-to-peripheral (OUT endpoint):** After each read action, an internal counter is auto decremented by two to the next location in the RX FIFO. When all bytes are read, buffer contents are automatically cleared. A new data packet can then be received on the next OUT token. Buffer contents can also be cleared using the Control Function register (bit CLBUF), when it is necessary to forcefully clear contents.

**Remark:** The delay time from the Write Endpoint Index register to the Read Data Port register must be at least 190 ns.

**Remark:** The delay time from the Write Endpoint Index register to the Write Data Port register must be at least 100 ns.

**Table 33. Data Port register: bit allocation**

| Bit       | 15             | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Symbol    | DATAPORT[15:8] |     |     |     |     |     |     |     |
| Reset     | 0              | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0              | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W            | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 7              | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| Symbol    | DATAPORT[7:0]  |     |     |     |     |     |     |     |
| Reset     | 0              | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0              | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W            | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

**Table 34. Data Port register: bit description**

| Bit     | Symbol         | Description       |
|---------|----------------|-------------------|
| 15 to 8 | DATAPORT[15:8] | data (upper byte) |
| 7 to 0  | DATAPORT[7:0]  | data (lower byte) |

### 8.3.4 Buffer Length register (address: 1Ch)

This register determines the current packet size (DATACOUNT) of the indexed endpoint FIFO. The bit allocation is given in [Table 35](#).

The Buffer Length register is automatically loaded with the FIFO size, when the Endpoint MaxPacketSize register is written (see [Table 39](#)). A smaller value can be written when required. After a bus reset, the Buffer Length register is made zero.

**IN endpoint:** When data transfer is performed in multiples of MaxPacketSize, the Buffer Length register is not significant. This register is useful only when transferring data that is not a multiple of MaxPacketSize. The following two examples demonstrate the significance of the Buffer Length register.

Example 1: Consider that the transfer size is 512 bytes and the MaxPacketSize is programmed as 64 bytes, the Buffer Length register need not be filled. This is because the transfer size is a multiple of MaxPacketSize, and MaxPacketSize packets will be automatically validated because the last packet is also of MaxPacketSize.

Example 2: Consider that the transfer size is 510 bytes and the MaxPacketSize is programmed as 64 bytes, the Buffer Length register must be filled with 62 bytes just before the microprocessor writes the last packet of 62 bytes. This ensures that the last packet, which is a short packet of 62 bytes, is automatically validated.

Use bit VENDP in the Control register if you are not using the Buffer Length register.

This is applicable only to the PIO mode access.

**OUT endpoint:** The DATACOUNT value is automatically initialized to the number of data bytes sent by the host on each ACK.

**Remark:** When using a 16-bit microprocessor bus, the last byte of an odd-sized packet is output as the lower byte (LSByte).

**Remark:** Buffer Length is valid only after an interrupt is generated for the OUT endpoint.

**Table 35. Buffer Length register: bit allocation**

| Bit       | 15              | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----------|-----------------|-----|-----|-----|-----|-----|-----|-----|
| Symbol    | DATACOUNT[15:8] |     |     |     |     |     |     |     |
| Reset     | 0               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W             | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 7               | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| Symbol    | DATACOUNT[7:0]  |     |     |     |     |     |     |     |
| Reset     | 0               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0               | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W             | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

**Table 36. Buffer Length register: bit description**

| Bit     | Symbol          | Description                                                                         |
|---------|-----------------|-------------------------------------------------------------------------------------|
| 15 to 0 | DATACOUNT[15:0] | <b>Data Count:</b> Determines the current packet size of the indexed endpoint FIFO. |

### 8.3.5 Buffer Status register (address: 1Eh)

This register is accessed using index. The endpoint index must first be set before accessing this register for the corresponding endpoint. It reflects the status of the double buffered endpoint FIFO.

**Remark:** This register is not applicable to the control endpoint.

**Remark:** For endpoint IN data transfer, firmware must ensure a 200 ns delay between writing of the data packet and reading the Buffer Status register. For endpoint OUT data transfer, firmware must also ensure a 200 ns delay between receiving the endpoint interrupt and reading the Buffer Status register. For more information, refer to [Ref. 3](#) “Using ISP1582/3 in a composite device application with alternate settings (AN10071)”.

[Table 37](#) shows the bit allocation of the Buffer Status register.

**Table 37. Buffer Status register: bit allocation**

| Bit       | 7        | 6 | 5 | 4 | 3 | 2 | 1    | 0    |
|-----------|----------|---|---|---|---|---|------|------|
| Symbol    | reserved |   |   |   |   |   | BUF1 | BUF0 |
| Reset     | -        | - | - | - | - | - | 0    | 0    |
| Bus reset | -        | - | - | - | - | - | 0    | 0    |
| Access    | -        | - | - | - | - | - | R    | R    |

**Table 38. Buffer Status register: bit description**

| Bit    | Symbol   | Description                                                                                                                                                                                     |
|--------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 2 | -        | reserved                                                                                                                                                                                        |
| 1 to 0 | BUF[1:0] | <b>Buffer:</b><br><b>00</b> — The buffers are not filled.<br><b>01</b> — One of the buffers is filled.<br><b>10</b> — One of the buffers is filled.<br><b>11</b> — Both the buffers are filled. |

### 8.3.6 Endpoint MaxPacketSize register (address: 04h)

This register determines the maximum packet size for all endpoints, except set-up token buffer, control IN and control OUT. The register contains 2 bytes, and the bit allocation is given in [Table 39](#).

Each time the register is written, the Buffer Length register of the corresponding endpoint is re-initialized to the FFOSZ field value. Bits NTRANS control the number of transactions allowed in a single microframe (for high-speed isochronous and interrupt endpoints only).

**Table 39. Endpoint MaxPacketSize register: bit allocation**

| Bit       | 15         | 14  | 13  | 12          | 11  | 10          | 9   | 8   |
|-----------|------------|-----|-----|-------------|-----|-------------|-----|-----|
| Symbol    | reserved   |     |     | NTRANS[1:0] |     | FFOSZ[10:8] |     |     |
| Reset     | -          | -   | -   | 0           | 0   | 0           | 0   | 0   |
| Bus reset | -          | -   | -   | 0           | 0   | 0           | 0   | 0   |
| Access    | -          | -   | -   | R/W         | R/W | R/W         | R/W | R/W |
| Bit       | 7          | 6   | 5   | 4           | 3   | 2           | 1   | 0   |
| Symbol    | FFOSZ[7:0] |     |     |             |     |             |     |     |
| Reset     | 0          | 0   | 0   | 0           | 0   | 0           | 0   | 0   |
| Bus reset | 0          | 0   | 0   | 0           | 0   | 0           | 0   | 0   |
| Access    | R/W        | R/W | R/W | R/W         | R/W | R/W         | R/W | R/W |

**Table 40. Endpoint MaxPacketSize register: bit description**

| Bit      | Symbol      | Description                                                                                                                                                                                                                                                              |
|----------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 to 13 | -           | reserved                                                                                                                                                                                                                                                                 |
| 12 to 11 | NTRANS[1:0] | <b>Number of Transactions:</b> HS mode only.<br><b>00</b> — 1 packet per microframe<br><b>01</b> — 2 packets per microframe<br><b>10</b> — 3 packets per microframe<br><b>11</b> — reserved<br>These bits are applicable only for isochronous or interrupt transactions. |
| 10 to 0  | FFOSZ[10:0] | <b>FIFO Size:</b> Sets the FIFO size, in bytes, for the indexed endpoint.<br>Applies to both high-speed and full-speed operations.                                                                                                                                       |

The ISP1582 supports all the transfers given in [Ref. 1 “Universal Serial Bus Specification Rev. 2.0”](#).

Each programmable FIFO can independently be configured using its Endpoint MaxPacketSize register (R/W: 04h), but the total physical size of all enabled endpoints (IN plus OUT) including set-up token buffer, control IN and control OUT, must not exceed 8192 bytes.

### 8.3.7 Endpoint Type register (address: 08h)

This register sets the endpoint type of the indexed endpoint: isochronous, bulk or interrupt. It also serves to enable the endpoint and configure it for double buffering. Automatic generation of an empty packet for a zero-length TX buffer can be disabled using bit NOEMPKT. The register contains 2 bytes, and the bit allocation is shown in [Table 41](#).

**Table 41. Endpoint Type register: bit allocation**

| Bit       | 15       | 14 | 13 | 12      | 11     | 10     | 9            | 8   |
|-----------|----------|----|----|---------|--------|--------|--------------|-----|
| Symbol    | reserved |    |    |         |        |        |              |     |
| Reset     | -        | -  | -  | -       | -      | -      | -            | -   |
| Bus reset | -        | -  | -  | -       | -      | -      | -            | -   |
| Access    | -        | -  | -  | -       | -      | -      | -            | -   |
| Bit       | 7        | 6  | 5  | 4       | 3      | 2      | 1            | 0   |
| Symbol    | reserved |    |    | NOEMPKT | ENABLE | DBLBUF | ENDPTYP[1:0] |     |
| Reset     | -        | -  | -  | 0       | 0      | 0      | 0            | 0   |
| Bus reset | -        | -  | -  | 0       | 0      | 0      | 0            | 0   |
| Access    | -        | -  | -  | R/W     | R/W    | R/W    | R/W          | R/W |

Table 42. Endpoint Type register: bit description

| Bit     | Symbol       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 to 5 | -            | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4       | NOEMPKT      | <b>No Empty Packet:</b> Logic 0 causes the ISP1582 to return a null length packet for the IN token after the DMA IN transfer is complete. For the IN DMA transfer, which does not require a null length packet after DMA completion, set to logic 1 to disable the generation of the null length packet.                                                                                                                                                                                                                                                         |
| 3       | ENABLE       | <b>Endpoint Enable:</b> Logic 1 enables the FIFO of the indexed endpoint. The memory size is allocated as specified in the Endpoint MaxPacketSize register. Logic 0 disables the FIFO.<br><br><b>Remark:</b> Stalling a data endpoint will confuse the Data Toggle bit on the stalled endpoint because the internal logic picks up from where it has stalled. Therefore, the Data Toggle bit must be reset by disabling and re-enabling the corresponding endpoint (by setting bit ENABLE to logic 0 or logic 1 in the Endpoint Type register) to reset the PID. |
| 2       | DBLBUF       | <b>Double Buffering:</b> Logic 1 enables double buffering for the indexed endpoint. Logic 0 disables double buffering.<br><br><b>Remark:</b> When performing a write to two empty buffers, ensure that a minimum of 200 ns delay is provided from the last write of the first buffer to the first write of the second buffer. Otherwise, the first few data bytes may not be written to the second buffer, causing data corruption.                                                                                                                              |
| 1 to 0  | ENDPTYP[1:0] | <b>Endpoint Type:</b> These bits select the endpoint type as follows.<br><b>00</b> — Not used<br><b>01</b> — Isochronous<br><b>10</b> — Bulk<br><b>11</b> — Interrupt                                                                                                                                                                                                                                                                                                                                                                                            |

## 8.4 DMA registers

The Generic DMA (GDMA) transfer can be done by writing the proper opcode in the DMA Command register. Control bits are given in [Table 43](#).

**GDMA read/write (opcode = 00h/01h) for GDMA mode:** Depending on the MODE[1:0] bits set in the DMA configuration register, the DACK, DIOR or DIOW signal strobes data. These signals are driven by the external DMA controller.

GDMA mode can operate in either counter mode or EOT-only mode.

In counter mode, bit DIS\_XFER\_CNT in the DMA Configuration register must be set to logic 0. The DMA Transfer Counter register must be programmed before any DMA command is issued. The DMA transfer counter is set by writing from the LSByte to the MSByte (address: 34h to 37h). The DMA transfer count is internally updated only after the MSByte is written. Once the DMA transfer is started, the transfer counter starts decrementing and on reaching 0, bit DMA\_XFER\_OK is set and an interrupt is generated by the ISP1582. If the DMA master wishes to terminate the DMA transfer, it can issue an EOT signal to the ISP1582. This EOT signal overrides the transfer counter and can terminate the DMA transfer at any time.

In EOT-only mode, DIS\_XFER\_CNT must be set to logic 1. Although the DMA transfer counter can still be programmed, it will not have any effect on the DMA transfer. The DMA transfer will start once the DMA command is issued. Any of the following three ways will terminate this DMA transfer:

- Detecting an external EOT
- Detecting an internal EOT (short packet on an OUT token)
- Issuing a GDMA stop command

There are three interrupts programmable to differentiate the method of DMA termination: bits INT\_EOT, EXT\_EOT and DMA\_XFER\_OK in the DMA Interrupt Reason register. For details, see [Table 55](#).

**Table 43. Control bits for GDMA read/write (opcode = 00h/01h)**

| Control bits                           | Description                                                                                 | Reference                |
|----------------------------------------|---------------------------------------------------------------------------------------------|--------------------------|
| <b>DMA Configuration register</b>      |                                                                                             |                          |
| MODE[1:0]                              | determines the active read/write data strobe signals                                        | <a href="#">Table 49</a> |
| WIDTH                                  | selects the DMA bus width: 8 or 16 bits                                                     |                          |
| DIS_XFER_CNT                           | disables the use of the DMA Transfer Counter                                                |                          |
| <b>DMA Hardware register</b>           |                                                                                             |                          |
| EOT_POL                                | selects the polarity of the EOT signal                                                      | <a href="#">Table 51</a> |
| ENDIAN[1:0]                            | determines whether the data is to be byte swapped or normal; applicable only in 16-bit mode |                          |
| ACK_POL, DREQ_POL, WRITE_POL, READ_POL | select polarity of DMA handshake signals                                                    |                          |

**Remark:** The DMA bus defaults to 3-state, until a DMA command is executed. All the other control signals are not 3-stated.

#### 8.4.1 DMA Command register (address: 30h)

The DMA Command register is a 1-byte register (for bit allocation, see [Table 44](#)) that initiates all DMA transfer activity on the DMA controller. The register is write-only: reading it will return FFh.

**Remark:** The DMA bus will be in 3-state, until a DMA command is executed.

**Table 44. DMA Command register: bit allocation**

| Bit       | 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|--------------|---|---|---|---|---|---|---|
| Symbol    | DMA_CMD[7:0] |   |   |   |   |   |   |   |
| Reset     | 1            | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bus reset | 1            | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Access    | W            | W | W | W | W | W | W | W |

**Table 45. DMA Command register: bit description**

| Bit    | Symbol       | Description                                      |
|--------|--------------|--------------------------------------------------|
| 7 to 0 | DMA_CMD[7:0] | DMA command code; see <a href="#">Table 46</a> . |

Table 46. DMA commands

| Code       | Name            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00h        | GDMA Read       | <b>Generic DMA IN token transfer:</b> Data is transferred from the external DMA bus to the internal buffer. Strobe: DIOW by the external DMA controller.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 01h        | GDMA Write      | <b>Generic DMA OUT token transfer:</b> Data is transferred from the internal buffer to the external DMA bus. Strobe: DIOR by the external DMA controller.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 02h to 0Dh | -               | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 0Eh        | Validate Buffer | <b>Validate Buffer (for debugging only):</b> Request from the microcontroller to validate the endpoint buffer, following a DMA-to-USB data transfer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 0Fh        | Clear Buffer    | <b>Clear Buffer:</b> Request from the microcontroller to clear the endpoint buffer, after a DMA-to-USB data transfer. Logic 1 clears the TX buffer of the indexed endpoint; the RX buffer is not affected. The TX buffer is automatically cleared once data is sent on the USB bus. This bit is set only when it is necessary to forcefully clear the buffer.<br><br><b>Remark:</b> If using double buffer, to clear both the buffers issue the Clear Buffer command two times, that is, set and clear this bit two times.                                                                                                                                                                                                              |
| 10h        | -               | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 11h        | Reset DMA       | <b>Reset DMA:</b> Initializes the DMA core to its power-on reset state.<br><br><b>Remark:</b> When the DMA core is reset during the Reset DMA command, the DREQ, DACK, DIOW and DIOR handshake pins will temporarily be asserted. This can confuse the external DMA controller. To prevent this, start the external DMA controller <b>only after</b> the DMA reset.                                                                                                                                                                                                                                                                                                                                                                     |
| 12h        | -               | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 13h        | GDMA Stop       | <b>GDMA stop:</b> This command stops the GDMA data transfer. Any data in the OUT endpoint that is not transferred by the DMA will remain in the buffer. The FIFO data for the IN endpoint will be written to the endpoint buffer. An interrupt bit will be set to indicate the completion of the DMA Stop command.<br><br><b>Remark:</b> For the DMA OUT transfer, if the DMA Burst Counter register is programmed to some value, for example 512 bytes, and if a GDMA Stop command is issued in the middle of a transfer, the transfer will continue until the end of the burst size (512 bytes). Issuing a GDMA stop command does not allow the ISP1582 to stop in the middle of the burst. It can only be stopped in between bursts. |
| 14h to FFh | -               | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

#### 8.4.2 DMA Transfer Counter register (address: 34h)

This 4-byte register sets up the total byte count for a DMA transfer (DMACR). It indicates the remaining number of bytes left for transfer. The bit allocation is given in [Table 47](#).

**For IN endpoint** — Because there is a FIFO in the ISP1582 DMA controller, some data may remain in the FIFO during the DMA transfer. The maximum FIFO size is 8 bytes, and the maximum delay time for data to be shifted to endpoint buffer is 60 ns.

**For OUT endpoint** — Data will not be cleared from the endpoint buffer, until all the data is read from the DMA FIFO.

If the DMA counter is disabled in the DMA transfer, it will still decrement and rollover when it reaches zero.

Table 47. DMA Transfer Counter register: bit allocation

| Bit    | 31                    | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
|--------|-----------------------|----|----|----|----|----|----|----|
| Symbol | DMACR4 = DMACR[31:24] |    |    |    |    |    |    |    |

Table 47. DMA Transfer Counter register: bit allocation ...continued

| Bit       | 31                    | 30  | 29  | 28  | 27  | 26  | 25  | 24  |
|-----------|-----------------------|-----|-----|-----|-----|-----|-----|-----|
| Reset     | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W                   | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 23                    | 22  | 21  | 20  | 19  | 18  | 17  | 16  |
| Symbol    | DMACR3 = DMACR[23:16] |     |     |     |     |     |     |     |
| Reset     | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W                   | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 15                    | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| Symbol    | DMACR2 = DMACR[15:8]  |     |     |     |     |     |     |     |
| Reset     | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W                   | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 7                     | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| Symbol    | DMACR1 = DMACR[7:0]   |     |     |     |     |     |     |     |
| Reset     | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0                     | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W                   | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

Table 48. DMA Transfer Counter register: bit description

| Bit      | Symbol                | Description                          |
|----------|-----------------------|--------------------------------------|
| 31 to 24 | DMACR4 = DMACR[31:24] | DMA transfer counter byte 4 (MSByte) |
| 23 to 16 | DMACR3 = DMACR[23:16] | DMA transfer counter byte 3          |
| 15 to 8  | DMACR2 = DMACR[15:8]  | DMA transfer counter byte 2          |
| 7 to 0   | DMACR1 = DMACR[7:0]   | DMA transfer counter byte 1 (LSByte) |

### 8.4.3 DMA Configuration register (address: 38h)

This register defines the DMA configuration for GDMA mode. The DMA Configuration register consists of 2 bytes. The bit allocation is given in [Table 49](#).

Table 49. DMA Configuration register: bit allocation

| Bit       | 15           | 14       | 13 | 12 | 11        | 10  | 9        | 8     |
|-----------|--------------|----------|----|----|-----------|-----|----------|-------|
| Symbol    | reserved     |          |    |    |           |     |          |       |
| Reset     | -            | -        | -  | -  | -         | -   | -        | -     |
| Bus reset | -            | -        | -  | -  | -         | -   | -        | -     |
| Access    | -            | -        | -  | -  | -         | -   | -        | -     |
| Bit       | 7            | 6        | 5  | 4  | 3         | 2   | 1        | 0     |
| Symbol    | DIS_XFER_CNT | reserved |    |    | MODE[1:0] |     | reserved | WIDTH |
| Reset     | 0            | -        | -  | -  | 0         | 0   | -        | 1     |
| Bus reset | 0            | -        | -  | -  | 0         | 0   | -        | 1     |
| Access    | R/W          | -        | -  | -  | R/W       | R/W | -        | R/W   |

Table 50. DMA Configuration register: bit description

| Bit     | Symbol       | Description <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 to 8 | -            | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 7       | DIS_XFER_CNT | <b>Disable Transfer Count:</b> Logic 1 disables the DMA Transfer Counter (see <a href="#">Table 47</a> ).                                                                                                                                                                                                                                                                                                                                     |
| 6 to 4  | -            | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 3 to 2  | MODE[1:0]    | <b>Mode:</b> These bits affect GDMA handshake signals.<br><b>00</b> — DIOW strobes data from the DMA bus into the ISP1582; DIOR puts data from the ISP1582 on the DMA bus.<br><b>01</b> — DACK strobes data from the DMA bus into the ISP1582; DIOR puts data from the ISP1582 on the DMA bus.<br><b>10</b> — DACK strobes data from the DMA bus into the ISP1582 and also puts data from the ISP1582 on the DMA bus.<br><b>11</b> — reserved |
| 1       | -            | reserved                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0       | WIDTH        | <b>Width:</b> This bit selects the DMA bus width.<br><b>0</b> — 8-bit data bus<br><b>1</b> — 16-bit data bus                                                                                                                                                                                                                                                                                                                                  |

[1] The DREQ pin will be driven only after performing a write access to the DMA Configuration register (that is, after configuring the DMA Configuration register).

#### 8.4.4 DMA Hardware register (address: 3Ch)

The DMA Hardware register consists of 1 byte. The bit allocation is shown in [Table 51](#).

This register determines the polarity of bus control signals (EOT, DACK, DREQ, DIOR and DIOW). It also controls whether the upper and lower parts of the data bus are swapped (bits ENDIAN[1:0]).

Table 51. DMA Hardware register: bit allocation

| Bit       | 7           | 6   | 5       | 4        | 3       | 2        | 1         | 0        |
|-----------|-------------|-----|---------|----------|---------|----------|-----------|----------|
| Symbol    | ENDIAN[1:0] |     | EOT_POL | reserved | ACK_POL | DREQ_POL | WRITE_POL | READ_POL |
| Reset     | 0           | 0   | 0       | -        | 0       | 1        | 0         | 0        |
| Bus reset | 0           | 0   | 0       | -        | 0       | 1        | 0         | 0        |
| Access    | R/W         | R/W | R/W     | -        | R/W     | R/W      | R/W       | R/W      |

Table 52. DMA Hardware register: bit description

| Bit    | Symbol      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 6 | ENDIAN[1:0] | <b>Endian:</b> These bits determine whether the data bus is swapped between the internal RAM and the DMA bus.<br><b>00</b> — Normal data representation; 16-bit bus: MSByte on DATA[15:8], LSByte on DATA[7:0]<br><b>01</b> — Swapped data representation; 16-bit bus: MSByte on DATA[7:0], LSByte on DATA[15:8]<br><b>10</b> — reserved<br><b>11</b> — reserved<br><b>Remark:</b> While operating with the 8-bit data bus, bits ENDIAN[1:0] must always be set to 00b. |
| 5      | EOT_POL     | <b>EOT Polarity:</b> Selects the polarity of the End-Of-Transfer input.<br><b>0</b> — EOT is active LOW<br><b>1</b> — EOT is active HIGH                                                                                                                                                                                                                                                                                                                                |
| 4      | -           | reserved; must be set to logic 0.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 3      | ACK_POL     | <b>Acknowledgment Polarity:</b> Selects the DMA acknowledgment polarity.<br><b>0</b> — DACK is active LOW<br><b>1</b> — DACK is active HIGH                                                                                                                                                                                                                                                                                                                             |
| 2      | DREQ_POL    | <b>DREQ Polarity:</b> Selects the DMA request polarity.<br><b>0</b> — DREQ is active LOW<br><b>1</b> — DREQ is active HIGH                                                                                                                                                                                                                                                                                                                                              |
| 1      | WRITE_POL   | <b>Write Polarity:</b> Selects the DIOW strobe polarity.<br><b>0</b> — DIOW is active LOW<br><b>1</b> — DIOW is active HIGH                                                                                                                                                                                                                                                                                                                                             |
| 0      | READ_POL    | <b>Read Polarity:</b> Selects the DIOR strobe polarity.<br><b>0</b> — DIOR is active LOW<br><b>1</b> — DIOR is active HIGH                                                                                                                                                                                                                                                                                                                                              |

#### 8.4.5 DMA Interrupt Reason register (address: 50h)

This 2-byte register shows the source(s) of DMA interrupt. Each bit is refreshed after a DMA command is executed. An interrupt source is cleared by writing logic 1 to the corresponding bit. On detecting the interrupt, the external microprocessor must read the DMA Interrupt Reason register and mask it with the corresponding bits in the DMA Interrupt Enable register to determine the source of the interrupt.

The bit allocation is given in [Table 53](#).

Table 53. DMA Interrupt Reason register: bit allocation

| Bit       | 15    | 14       | 13 | 12        | 11      | 10      | 9        | 8           |
|-----------|-------|----------|----|-----------|---------|---------|----------|-------------|
| Symbol    | TEST3 | reserved |    | GDMA_STOP | EXT_EOT | INT_EOT | reserved | DMA_XFER_OK |
| Reset     | -     | -        | -  | 0         | 0       | 0       | -        | 0           |
| Bus reset | -     | -        | -  | 0         | 0       | 0       | -        | 0           |
| Access    | R     | -        | -  | R/W       | R/W     | R/W     | R/W      | R/W         |

| Bit       | 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|----------|---|---|---|---|---|---|---|
| Symbol    | reserved |   |   |   |   |   |   |   |
| Reset     | -        | - | - | - | - | - | - | - |
| Bus reset | -        | - | - | - | - | - | - | - |
| Access    | -        | - | - | - | - | - | - | - |

Table 54. DMA Interrupt Reason register: bit description

| Bit      | Symbol      | Description                                                                                                                                                                                                                                                                 |
|----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15       | TEST3       | This bit is set when the DMA transfer for a packet (OUT transfer) terminates before the whole packet has been transferred. This bit is a status bit, and the corresponding mask bit of this register is always logic 0. Writing any value other than logic 0 has no effect. |
| 14 to 13 | -           | reserved                                                                                                                                                                                                                                                                    |
| 12       | GDMA_STOP   | <b>GDMA Stop:</b> When the GDMA_STOP command is issued to DMA Command registers, it means the DMA transfer has successfully terminated.                                                                                                                                     |
| 11       | EXT_EOT     | <b>External EOT:</b> Logic 1 indicates that an external EOT is detected.                                                                                                                                                                                                    |
| 10       | INT_EOT     | <b>Internal EOT:</b> Logic 1 indicates that an internal EOT is detected; see <a href="#">Table 55</a> .                                                                                                                                                                     |
| 9        | -           | reserved                                                                                                                                                                                                                                                                    |
| 8        | DMA_XFER_OK | <b>DMA Transfer OK:</b> Logic 1 indicates that the DMA transfer is completed (DMA Transfer Counter has become zero).                                                                                                                                                        |
| 7 to 0   | -           | reserved                                                                                                                                                                                                                                                                    |

Table 55. Internal EOT-functional relation with bit DMA\_XFER\_OK

| INT_EOT | DMA_XFER_OK | Description                                                                                    |
|---------|-------------|------------------------------------------------------------------------------------------------|
| 1       | 0           | During the DMA transfer, there is a premature termination with short packet.                   |
| 1       | 1           | DMA transfer is completed with short packet and the DMA transfer counter has reached 0.        |
| 0       | 1           | DMA transfer is completed without any short packet and the DMA transfer counter has reached 0. |

#### 8.4.6 DMA Interrupt Enable register (address: 54h)

This 2-byte register controls the interrupt generation of the source bits in the DMA Interrupt Reason register. The bit allocation is given in [Table 56](#). The bit description is given in [Table 54](#).

Logic 1 enables the interrupt generation. After a bus reset, interrupt generation is disabled, with the values turning to logic 0.

Table 56. DMA Interrupt Enable register: bit allocation

| Bit       | 15    | 14       | 13 | 12           | 11         | 10         | 9        | 8              |
|-----------|-------|----------|----|--------------|------------|------------|----------|----------------|
| Symbol    | TEST4 | reserved |    | IE_GDMA_STOP | IE_EXT_EOT | IE_INT_EOT | reserved | IE_DMA_XFER_OK |
| Reset     | -     | -        | -  | 0            | 0          | 0          | 0        | 0              |
| Bus reset | -     | -        | -  | 0            | 0          | 0          | 0        | 0              |
| Access    | R     | -        | -  | R/W          | R/W        | R/W        | R/W      | R/W            |

| Bit       | 7        | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----------|----------|-----|-----|-----|-----|-----|-----|-----|
| Symbol    | reserved |     |     |     |     |     |     |     |
| Reset     | 0        | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0        | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W      | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

#### 8.4.7 DMA Endpoint register (address: 58h)

This 1-byte register selects a USB endpoint FIFO as a source or destination for DMA transfers. The bit allocation is given in [Table 57](#).

**Table 57. DMA Endpoint register: bit allocation**

| Bit       | 7        | 6 | 5 | 4 | 3          | 2   | 1   | 0      |
|-----------|----------|---|---|---|------------|-----|-----|--------|
| Symbol    | reserved |   |   |   | EPIDX[2:0] |     |     | DMADIR |
| Reset     | -        | - | - | - | 0          | 0   | 0   | 0      |
| Bus reset | -        | - | - | - | 0          | 0   | 0   | 0      |
| Access    | -        | - | - | - | R/W        | R/W | R/W | R/W    |

**Table 58. DMA Endpoint register: bit description**

| Bit    | Symbol     | Description                                                                                                                                     |
|--------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 7 to 4 | -          | reserved                                                                                                                                        |
| 3 to 1 | EPIDX[2:0] | <b>Endpoint Index:</b> Selects the indicated endpoint for DMA access                                                                            |
| 0      | DMADIR     | <b>DMA Direction:</b><br><b>0</b> — Selects the RX/OUT FIFO for DMA read transfers<br><b>1</b> — Selects the TX/IN FIFO for DMA write transfers |

The DMA Endpoint register must not reference the endpoint that is indexed by the Endpoint Index register (2Ch) at any time. Doing so will result in data corruption. Therefore, if the DMA Endpoint register is unused, point it to an unused endpoint. If the DMA Endpoint register, however, is pointed to an active endpoint, the firmware must not reference the same endpoint on the Endpoint Index register.

#### 8.4.8 DMA Burst Counter register (address: 64h)

[Table 59](#) shows the bit allocation of the 2-byte register.

**Table 59. DMA Burst Counter register: bit allocation**

| Bit       | 15                | 14  | 13  | 12                 | 11  | 10  | 9   | 8   |
|-----------|-------------------|-----|-----|--------------------|-----|-----|-----|-----|
| Symbol    | reserved          |     |     | BURSTCOUNTER[12:8] |     |     |     |     |
| Reset     | -                 | -   | -   | 0                  | 0   | 0   | 0   | 0   |
| Bus reset | -                 | -   | -   | 0                  | 0   | 0   | 0   | 0   |
| Access    | -                 | -   | -   | R/W                | R/W | R/W | R/W | R/W |
| Bit       | 7                 | 6   | 5   | 4                  | 3   | 2   | 1   | 0   |
| Symbol    | BURSTCOUNTER[7:0] |     |     |                    |     |     |     |     |
| Reset     | 0                 | 0   | 0   | 0                  | 0   | 0   | 1   | 0   |
| Bus reset | 0                 | 0   | 0   | 0                  | 0   | 0   | 1   | 0   |
| Access    | R/W               | R/W | R/W | R/W                | R/W | R/W | R/W | R/W |

Table 60. DMA Burst Counter register: bit description

| Bit      | Symbol               | Description                                                                                                                                                                                                                                                                                                           |
|----------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15 to 13 | -                    | reserved                                                                                                                                                                                                                                                                                                              |
| 12 to 0  | BURST COUNTER [12:0] | <b>Burst Counter:</b> This register defines the burst length. The counter must be programmed to be a multiple of two in 16-bit mode.<br>The value of the burst counter must be programmed so that the burst counter is a factor of the buffer size.<br>It is used to determine the assertion and deassertion of DREQ. |

## 8.5 General registers

### 8.5.1 Interrupt register (address: 18h)

The Interrupt register consists of 4 bytes. The bit allocation is given in [Table 61](#).

When a bit is set in the Interrupt register, it indicates that the hardware condition for an interrupt has occurred. When the Interrupt register content is nonzero, the INT output will be asserted corresponding to the Interrupt Enable register. On detecting the interrupt, the external microprocessor must read the Interrupt register and mask it with the corresponding bits in the Interrupt Enable register to determine the source of the interrupt.

Each endpoint buffer has a dedicated interrupt bit (EPnTX, EPnRX). In addition, various bus states can generate an interrupt: resume, suspend, pseudo SOF, SOF and bus reset. The DMA controller only has one interrupt bit: the source for a DMA interrupt is shown in the DMA Interrupt Reason register.

Each interrupt bit can individually be cleared by writing logic 1. The DMA Interrupt bit can be cleared by writing logic 1 to the related interrupt source bit in the DMA Interrupt Reason register, followed by writing logic 1 to the DMA bit of the Interrupt register.

Table 61. Interrupt register: bit allocation

| Bit       | 31       | 30    | 29    | 28    | 27    | 26    | 25       | 24       |
|-----------|----------|-------|-------|-------|-------|-------|----------|----------|
| Symbol    | reserved |       |       |       |       |       | EP7TX    | EP7RX    |
| Reset     | -        | -     | -     | -     | -     | -     | 0        | 0        |
| Bus reset | -        | -     | -     | -     | -     | -     | 0        | 0        |
| Access    | -        | -     | -     | -     | -     | -     | R/W      | R/W      |
| Bit       | 23       | 22    | 21    | 20    | 19    | 18    | 17       | 16       |
| Symbol    | EP6TX    | EP6RX | EP5TX | EP5RX | EP4TX | EP4RX | EP3TX    | EP3RX    |
| Reset     | 0        | 0     | 0     | 0     | 0     | 0     | 0        | 0        |
| Bus reset | 0        | 0     | 0     | 0     | 0     | 0     | 0        | 0        |
| Access    | R/W      | R/W   | R/W   | R/W   | R/W   | R/W   | R/W      | R/W      |
| Bit       | 15       | 14    | 13    | 12    | 11    | 10    | 9        | 8        |
| Symbol    | EP2TX    | EP2RX | EP1TX | EP1RX | EP0TX | EP0RX | reserved | EP0SETUP |
| Reset     | 0        | 0     | 0     | 0     | 0     | 0     | -        | 0        |
| Bus reset | 0        | 0     | 0     | 0     | 0     | 0     | -        | 0        |
| Access    | R/W      | R/W   | R/W   | R/W   | R/W   | R/W   | -        | R/W      |

| Bit       | 7    | 6   | 5       | 4      | 3    | 2    | 1   | 0      |
|-----------|------|-----|---------|--------|------|------|-----|--------|
| Symbol    | VBUS | DMA | HS_STAT | RESUME | SUSP | PSOF | SOF | BRESET |
| Reset     | 0    | 0   | 0       | 0      | 0    | 0    | 0   | 0      |
| Bus reset | 0    | 0   | 0       | 0      | 0    | 0    | 0   | 1      |
| Access    | R/W  | R/W | R/W     | R/W    | R/W  | R/W  | R/W | R/W    |

Table 62. Interrupt register: bit description

| Bit      | Symbol   | Description                                                                                                                                                                                                                                                        |
|----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31 to 26 | -        | reserved                                                                                                                                                                                                                                                           |
| 25       | EP7TX    | logic 1 indicates the endpoint 7 TX buffer as interrupt source                                                                                                                                                                                                     |
| 24       | EP7RX    | logic 1 indicates the endpoint 7 RX buffer as interrupt source                                                                                                                                                                                                     |
| 23       | EP6TX    | logic 1 indicates the endpoint 6 TX buffer as interrupt source                                                                                                                                                                                                     |
| 22       | EP6RX    | logic 1 indicates the endpoint 6 RX buffer as interrupt source                                                                                                                                                                                                     |
| 21       | EP5TX    | logic 1 indicates the endpoint 5 TX buffer as interrupt source                                                                                                                                                                                                     |
| 20       | EP5RX    | logic 1 indicates the endpoint 5 RX buffer as interrupt source                                                                                                                                                                                                     |
| 19       | EP4TX    | logic 1 indicates the endpoint 4 TX buffer as interrupt source                                                                                                                                                                                                     |
| 18       | EP4RX    | logic 1 indicates the endpoint 4 RX buffer as interrupt source                                                                                                                                                                                                     |
| 17       | EP3TX    | logic 1 indicates the endpoint 3 TX buffer as interrupt source                                                                                                                                                                                                     |
| 16       | EP3RX    | logic 1 indicates the endpoint 3 RX buffer as interrupt source.                                                                                                                                                                                                    |
| 15       | EP2TX    | logic 1 indicates the endpoint 2 TX buffer as interrupt source                                                                                                                                                                                                     |
| 14       | EP2RX    | logic 1 indicates the endpoint 2 RX buffer as interrupt source                                                                                                                                                                                                     |
| 13       | EP1TX    | logic 1 indicates the endpoint 1 TX buffer as interrupt source                                                                                                                                                                                                     |
| 12       | EP1RX    | logic 1 indicates the endpoint 1 RX buffer as interrupt source                                                                                                                                                                                                     |
| 11       | EP0TX    | logic 1 indicates the endpoint 0 data TX buffer as interrupt source                                                                                                                                                                                                |
| 10       | EP0RX    | logic 1 indicates the endpoint 0 data RX buffer as interrupt source                                                                                                                                                                                                |
| 9        | -        | reserved                                                                                                                                                                                                                                                           |
| 8        | EP0SETUP | logic 1 indicates that a SETUP token was received on endpoint 0                                                                                                                                                                                                    |
| 7        | VBUS     | logic 1 indicates a transition from LOW to HIGH transition on V <sub>BUS</sub>                                                                                                                                                                                     |
| 6        | DMA      | <b>DMA Status:</b> Logic 1 indicates a change in the DMA Interrupt Reason register.                                                                                                                                                                                |
| 5        | HS_STAT  | <b>High-Speed Status:</b> Logic 1 indicates a change from full-speed to high-speed mode (HS connection). This bit is not set when the system goes into full-speed suspend.                                                                                         |
| 4        | RESUME   | <b>Resume Status:</b> Logic 1 indicates that a status change from suspend to resume (active) was detected.                                                                                                                                                         |
| 3        | SUSP     | <b>Suspend Status:</b> Logic 1 indicates that a status change from active to suspend was detected on the bus.                                                                                                                                                      |
| 2        | PSOF     | <b>Pseudo SOF Interrupt:</b> Logic 1 indicates that a pseudo SOF or $\mu$ SOF was received. Pseudo SOF is an internally generated clock signal (full-speed: 1 ms period, high-speed: 125 $\mu$ s period) that is not synchronized to the USB bus SOF or $\mu$ SOF. |
| 1        | SOF      | <b>SOF Interrupt:</b> Logic 1 indicates that a SOF or $\mu$ SOF was received.                                                                                                                                                                                      |
| 0        | BRESET   | <b>Bus Reset:</b> Logic 1 indicates that a USB bus reset was detected. When bit OTG in the OTG register is set, BRESET will not be set; instead, this interrupt bit will report SE0 on DP and DM for 2 ms.                                                         |

### 8.5.2 Chip ID register (address: 70h)

This read-only register contains the chip identification and hardware version numbers. Firmware must check this information to determine functions and features supported. The register contains 3 bytes, and the bit allocation is shown in [Table 63](#).

**Table 63. Chip ID register: bit allocation**

| Bit       | 23           | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
|-----------|--------------|----|----|----|----|----|----|----|
| Symbol    | CHIPID[15:8] |    |    |    |    |    |    |    |
| Reset     | 0            | 0  | 0  | 1  | 0  | 1  | 0  | 1  |
| Bus reset | 0            | 0  | 0  | 1  | 0  | 1  | 0  | 1  |
| Access    | R            | R  | R  | R  | R  | R  | R  | R  |
| Bit       | 15           | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| Symbol    | CHIPID[7:0]  |    |    |    |    |    |    |    |
| Reset     | 1            | 0  | 0  | 0  | 0  | 0  | 1  | 0  |
| Bus reset | 1            | 0  | 0  | 0  | 0  | 0  | 1  | 0  |
| Access    | R            | R  | R  | R  | R  | R  | R  | R  |
| Bit       | 7            | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| Symbol    | VERSION[7:0] |    |    |    |    |    |    |    |
| Reset     | 0            | 0  | 1  | 1  | 0  | 0  | 0  | 0  |
| Bus reset | 0            | 0  | 1  | 1  | 0  | 0  | 0  | 0  |
| Access    | R            | R  | R  | R  | R  | R  | R  | R  |

**Table 64. Chip ID register: bit description**

| Bit      | Symbol       | Description                          |
|----------|--------------|--------------------------------------|
| 23 to 16 | CHIPID[15:8] | <b>Chip ID:</b> Lower byte (15h)     |
| 15 to 8  | CHIPID[7:0]  | <b>Chip ID:</b> Upper byte (82h)     |
| 7 to 0   | VERSION[7:0] | <b>Version:</b> Version number (30h) |

### 8.5.3 Frame Number register (address: 74h)

This read-only register contains the frame number of the last successfully received Start-Of-Frame (SOF). The register contains 2 bytes, and the bit allocation is given in [Table 65](#). In case of 8-bit access, the register content is returned lower byte first.

**Table 65. Frame Number register: bit allocation**

| Bit       | 15        | 14 | 13            | 12 | 11 | 10         | 9 | 8 |
|-----------|-----------|----|---------------|----|----|------------|---|---|
| Symbol    | reserved  |    | MICROSOF[2:0] |    |    | SOFR[10:8] |   |   |
| Reset     | -         | -  | 0             | 0  | 0  | 0          | 0 | 0 |
| Bus reset | -         | -  | 0             | 0  | 0  | 0          | 0 | 0 |
| Access    | -         | -  | R             | R  | R  | R          | R | R |
| Bit       | 7         | 6  | 5             | 4  | 3  | 2          | 1 | 0 |
| Symbol    | SOFR[7:0] |    |               |    |    |            |   |   |
| Reset     | 0         | 0  | 0             | 0  | 0  | 0          | 0 | 0 |
| Bus reset | 0         | 0  | 0             | 0  | 0  | 0          | 0 | 0 |
| Access    | R         | R  | R             | R  | R  | R          | R | R |

**Table 66. Frame Number register: bit description**

| Bit      | Symbol        | Description       |
|----------|---------------|-------------------|
| 15 to 14 | -             | reserved          |
| 13 to 11 | MICROSOF[2:0] | microframe number |
| 10 to 0  | SOFR[10:0]    | frame number      |

### 8.5.4 Scratch register (address: 78h)

This 16-bit register can be used by the firmware to save and restore information. For example, the device status before it enters the suspend state. The bit allocation is given in [Table 67](#).

**Table 67. Scratch register: bit allocation**

| Bit       | 15         | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----------|------------|-----|-----|-----|-----|-----|-----|-----|
| Symbol    | SFIRH[7:0] |     |     |     |     |     |     |     |
| Reset     | 0          | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0          | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W        | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Bit       | 7          | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| Symbol    | SFIRL[7:0] |     |     |     |     |     |     |     |
| Reset     | 0          | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Bus reset | 0          | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| Access    | R/W        | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

**Table 68. Scratch register: bit description**

| Bit     | Symbol     | Description                                         |
|---------|------------|-----------------------------------------------------|
| 15 to 8 | SFIRH[7:0] | Scratch firmware information register (higher byte) |
| 7 to 0  | SFIRL[7:0] | Scratch firmware information register (lower byte)  |

### 8.5.5 Unlock Device register (address: 7Ch)

To protect registers from getting corrupted when the ISP1582 goes into suspend, the write operation is disabled if bit PWRON in the Mode register is set to logic 0. In this case, when the chip resumes, the Unlock Device command must first be issued to this register before attempting to write to the rest of the registers. This is done by writing unlock code (AA37h) to this register. The bit allocation of the Unlock Device register is given in [Table 69](#).

**Table 69. Unlock Device register: bit allocation**

| Bit       | 15                 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|-----------|--------------------|----|----|----|----|----|---|---|
| Symbol    | ULCODE[15:8] = AAh |    |    |    |    |    |   |   |
| Reset     | not applicable     |    |    |    |    |    |   |   |
| Bus reset | not applicable     |    |    |    |    |    |   |   |
| Access    | W                  | W  | W  | W  | W  | W  | W | W |
| Bit       | 7                  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| Symbol    | ULCODE[7:0] = 37h  |    |    |    |    |    |   |   |

| Bit       | 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|----------------|---|---|---|---|---|---|---|
| Reset     | not applicable |   |   |   |   |   |   |   |
| Bus reset | not applicable |   |   |   |   |   |   |   |
| Access    | W              | W | W | W | W | W | W | W |

Table 70. Unlock Device register: bit description

| Bit     | Symbol       | Description                                                                                                      |
|---------|--------------|------------------------------------------------------------------------------------------------------------------|
| 15 to 0 | ULCODE[15:0] | <b>Unlock Code:</b> Writing data AA37h unlocks the internal registers and FIFOs for writing, following a resume. |

When bit PWRON in the Mode register is logic 1, the chip is powered. In such a case, you do not need to issue the Unlock command because the microprocessor is powered and therefore, the RD\_N, WR\_N and CS\_N signals maintain their states.

When bit PWRON is logic 0, the RD\_N, WR\_N and CS\_N signals are floating because the microprocessor is not powered. To protect the ISP1582 registers from being corrupted during suspend, register write is locked when the chip goes into suspend. Therefore, you need to issue the Unlock command to unlock the ISP1582 registers.

### 8.5.6 Test Mode register (address: 84h)

This 1-byte register allows the firmware to set pins DP and DM to predetermined states for testing purposes. The bit allocation is given in [Table 71](#).

**Remark:** Only one bit can be set to logic 1 at a time. This must be implemented for the Hi-Speed USB logo compliance testing. To exit test mode, power cycle is required.

Table 71. Test Mode register: bit allocation

| Bit       | 7         | 6        | 5 | 4         | 3    | 2      | 1      | 0       |
|-----------|-----------|----------|---|-----------|------|--------|--------|---------|
| Symbol    | FORCEHS   | reserved |   | FORCEFS   | PRBS | KSTATE | JSTATE | SE0_NAK |
| Reset     | 0         | -        | - | 0         | 0    | 0      | 0      | 0       |
| Bus reset | unchanged | -        | - | unchanged | 0    | 0      | 0      | 0       |
| Access    | R/W       | -        | - | R/W       | R/W  | R/W    | R/W    | R/W     |

Table 72. Test Mode register: bit description

| Bit    | Symbol  | Description                                                                                                                                                     |
|--------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7      | FORCEHS | <b>Force High-Speed:</b> Logic 1 <sup>[1]</sup> forces the hardware to high-speed mode only and disables the chirp detection logic.                             |
| 6 to 5 | -       | reserved                                                                                                                                                        |
| 4      | FORCEFS | <b>Force Full-Speed:</b> Logic 1 <sup>[1]</sup> forces the physical layer to full-speed mode only and disables the chirp detection logic.                       |
| 3      | PRBS    | <b>Predetermined Random Pattern:</b> Logic 1 <sup>[2]</sup> sets pins DP and DM to toggle in a predetermined random pattern.                                    |
| 2      | KSTATE  | <b>K-State:</b> Logic 1 <sup>[2]</sup> sets pins DP and DM to the K state.                                                                                      |
| 1      | JSTATE  | <b>J-State:</b> Logic 1 <sup>[2]</sup> sets pins DP and DM to the J state.                                                                                      |
| 0      | SE0_NAK | <b>SE0 NAK:</b> Logic 1 <sup>[2]</sup> sets pins DP and DM to a high-speed quiescent state. The device only responds to a valid high-speed IN token with a NAK. |

[1] Either FORCEHS or FORCEFS must be set at a time.

[2] Of the four bits (PRBS, KSTATE, JSTATE and SE0\_NAK), only one bit must be set at a time.

## 9. Limiting values

**Table 73. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol        | Parameter                       | Conditions                           | Min                      | Max            | Unit |
|---------------|---------------------------------|--------------------------------------|--------------------------|----------------|------|
| $V_{CC}$      | supply voltage                  |                                      | -0.5                     | +4.6           | V    |
| $V_{CC(I/O)}$ | input/output supply voltage     |                                      | -0.5                     | +4.6           | V    |
| $V_I$         | input voltage                   |                                      | <a href="#">[1]</a> -0.5 | $V_{CC} + 0.5$ | V    |
| $I_{lu}$      | latch-up current                | $V_I < 0\text{ V}$ or $V_I > V_{CC}$ | -                        | 100            | mA   |
| $V_{esd}$     | electrostatic discharge voltage | $I_{LI} < 1\text{ }\mu\text{A}$      | -2000                    | +2000          | V    |
| $T_{stg}$     | storage temperature             |                                      | -40                      | +125           | °C   |

[1] The maximum value for 5 V tolerant pins is 6 V.

## 10. Recommended operating conditions

**Table 74. Recommended operating conditions**

| Symbol        | Parameter                        | Conditions              | Min      | Typ | Max      | Unit |
|---------------|----------------------------------|-------------------------|----------|-----|----------|------|
| $V_{CC}$      | supply voltage                   |                         | 3.0      | -   | 3.6      | V    |
| $V_{CC(I/O)}$ | input/output supply voltage      |                         | $V_{CC}$ | -   | $V_{CC}$ | V    |
| $V_I$         | input voltage                    | $V_{CC} = 3.3\text{ V}$ | 0        | -   | 3.3      | V    |
| $V_{IA(I/O)}$ | input voltage on analog I/O pins | on pins DP and DM       | 0        | -   | 3.6      | V    |
| $V_{(pu)OD}$  | open-drain pull-up voltage       |                         | 0        | -   | $V_{CC}$ | V    |
| $T_{amb}$     | ambient temperature              |                         | -40      | -   | +85      | °C   |
| $T_j$         | junction temperature             |                         | -40      | -   | +125     | °C   |

## 11. Static characteristics

**Table 75. Static characteristics: supply pins**

$V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; typical values at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol                          | Parameter                           | Conditions              | Min      | Typ      | Max      | Unit          |
|---------------------------------|-------------------------------------|-------------------------|----------|----------|----------|---------------|
| <b>Supply voltage</b>           |                                     |                         |          |          |          |               |
| $V_{CC}$                        | supply voltage                      |                         | 3.0      | 3.3      | 3.6      | V             |
| $I_{CC}$                        | supply current                      | $V_{CC} = 3.3\text{ V}$ |          |          |          |               |
|                                 |                                     | high-speed              | -        | 45       | 60       | mA            |
|                                 |                                     | full-speed              | -        | 17       | 25       | mA            |
| $I_{CC(susp)}$                  | suspend supply current              | $V_{CC} = 3.3\text{ V}$ | -        | 160      | -        | $\mu\text{A}$ |
| <b>I/O pad supply voltage</b>   |                                     |                         |          |          |          |               |
| $V_{CC(I/O)}$                   | input/output supply voltage         |                         | $V_{CC}$ | $V_{CC}$ | $V_{CC}$ | V             |
| $I_{CC(I/O)}$                   | supply current on pin $V_{CC(I/O)}$ | <a href="#">[1]</a>     | -        | 3        | -        | mA            |
| <b>Regulated supply voltage</b> |                                     |                         |          |          |          |               |
| $V_{CC(1V8)}$                   | supply voltage (1.8 V)              | with voltage converter  | 1.65     | 1.8      | 1.95     | V             |

[1]  $I_{CC(I/O)}$  test condition: device set up under the test mode vector and I/O is subjected to external conditions.

**Table 76. Static characteristics: digital pins** $V_{CC(I/O)} = V_{CC}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol                 | Parameter                 | Conditions                    | Min                    | Typ | Max               | Unit          |
|------------------------|---------------------------|-------------------------------|------------------------|-----|-------------------|---------------|
| <b>Input levels</b>    |                           |                               |                        |     |                   |               |
| $V_{IL}$               | LOW-level input voltage   |                               | -                      | -   | $0.3V_{CC(I/O)}$  | V             |
| $V_{IH}$               | HIGH-level input voltage  |                               | $0.7V_{CC(I/O)}$       | -   | -                 | V             |
| <b>Output levels</b>   |                           |                               |                        |     |                   |               |
| $V_{OL}$               | LOW-level output voltage  | $I_{OL} = \text{rated drive}$ | -                      | -   | $0.15V_{CC(I/O)}$ | V             |
| $V_{OH}$               | HIGH-level output voltage | $I_{OH} = \text{rated drive}$ | $0.8V_{CC(I/O)}$       | -   | -                 | V             |
| <b>Leakage current</b> |                           |                               |                        |     |                   |               |
| $I_{LI}$               | input leakage current     |                               | <a href="#">[1]</a> -5 | -   | +5                | $\mu\text{A}$ |

[1] This value is applicable to transistor input only. The value will be different if internal pull-up or pull-down resistors are used.

**Table 77. Static characteristics: OTG detection** $V_{CC(I/O)} = V_{CC}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol                                   | Parameter                             | Conditions                                     | Min | Typ | Max  | Unit     |
|------------------------------------------|---------------------------------------|------------------------------------------------|-----|-----|------|----------|
| <b>Charging and discharging resistor</b> |                                       |                                                |     |     |      |          |
| $R_{DN(VBUS)}$                           | pull-down resistance on pin $V_{BUS}$ | only when bit DISCV is set in the OTG register | 680 | 800 | 1030 | $\Omega$ |
| $R_{UP(DP)}$                             | pull-up resistance on pin DP          | only when bit DP is set in the OTG register    | 300 | 550 | 780  | $\Omega$ |
| <b>Comparator levels</b>                 |                                       |                                                |     |     |      |          |
| $V_{BVALID}$                             | $V_{BUS}$ valid detection             |                                                | 2.0 | -   | 4.0  | V        |
| $V_{SESEND}$                             | $V_{BUS}$ B-session end detection     |                                                | 0.2 | -   | 0.8  | V        |

**Table 78. Static characteristics: analog I/O pins DP and DM** $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.[\[1\]](#)

| Symbol                        | Parameter                              | Conditions                                   | Min | Typ | Max | Unit          |
|-------------------------------|----------------------------------------|----------------------------------------------|-----|-----|-----|---------------|
| <b>Input levels</b>           |                                        |                                              |     |     |     |               |
| $V_{DI}$                      | differential input sensitivity voltage | $ V_{I(DP)} - V_{I(DM)} $                    | 0.2 | -   | -   | V             |
| $V_{CM}$                      | differential common mode voltage       | includes $V_{DI}$ range                      | 0.8 | -   | 2.5 | V             |
| $V_{SE}$                      | single-ended receiver threshold        |                                              | 0.8 | -   | 2.0 | V             |
| $V_{IL}$                      | LOW-level input voltage                |                                              | -   | -   | 0.8 | V             |
| $V_{IH}$                      | HIGH-level input voltage               |                                              | 2.0 | -   | -   | V             |
| <b>Schmitt-trigger inputs</b> |                                        |                                              |     |     |     |               |
| $V_{th(LH)}$                  | positive-going threshold voltage       |                                              | 1.4 | -   | 1.9 | V             |
| $V_{th(HL)}$                  | negative-going threshold voltage       |                                              | 0.9 | -   | 1.5 | V             |
| $V_{hys}$                     | hysteresis voltage                     |                                              | 0.4 | -   | 0.7 | V             |
| <b>Output levels</b>          |                                        |                                              |     |     |     |               |
| $V_{OL}$                      | LOW-level output voltage               | $R_L = 1.5\text{ k}\Omega$ to $3.6\text{ V}$ | -   | -   | 0.4 | V             |
| $V_{OH}$                      | HIGH-level output voltage              | $R_L = 15\text{ k}\Omega$ to GND             | 2.8 | -   | 3.6 | V             |
| <b>Leakage current</b>        |                                        |                                              |     |     |     |               |
| $I_{LZ}$                      | OFF-state leakage current              | $0\text{ V} < V_I < 3.3\text{ V}$            | -10 | -   | +10 | $\mu\text{A}$ |

**Table 78. Static characteristics: analog I/O pins DP and DM ...continued** $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.<sup>[1]</sup>

| Symbol             | Parameter                                                            | Conditions         | Min  | Typ | Max  | Unit       |
|--------------------|----------------------------------------------------------------------|--------------------|------|-----|------|------------|
| <b>Capacitance</b> |                                                                      |                    |      |     |      |            |
| $C_{in}$           | input capacitance                                                    | pin to GND         | -    | -   | 10   | pF         |
| <b>Resistance</b>  |                                                                      |                    |      |     |      |            |
| $Z_{DRV}$          | driver output impedance for driver which is not high-speed capable   | steady-state drive | 40.5 | -   | 49.5 | $\Omega$   |
| $Z_{INP}$          | input impedance exclusive of pull-up/pull-down (for low-/full-speed) |                    | 10   | -   | -    | M $\Omega$ |

[1] Pin DP is the USB positive data pin, and pin DM is the USB negative data pin.

## 12. Dynamic characteristics

**Table 79. Dynamic characteristics** $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol                       | Parameter                    | Conditions                 | Min  | Typ | Max  | Unit          |
|------------------------------|------------------------------|----------------------------|------|-----|------|---------------|
| <b>Reset</b>                 |                              |                            |      |     |      |               |
| $t_{W(RES\overline{E}T\_N)}$ | external RESET_N pulse width | crystal oscillator running | 500  | -   | -    | $\mu\text{s}$ |
| <b>Crystal oscillator</b>    |                              |                            |      |     |      |               |
| $f_{XTAL1}$                  | frequency on pin XTAL1       |                            | -    | 12  | -    | MHz           |
| $R_S$                        | series resistance            |                            | -    | -   | 100  | $\Omega$      |
| $C_L$                        | load capacitance             |                            | -    | 18  | -    | pF            |
| <b>External clock input</b>  |                              |                            |      |     |      |               |
| $V_I$                        | input voltage                |                            | 1.65 | 1.8 | 1.95 | V             |
| $t_J$                        | external clock jitter        |                            | -    | -   | 500  | ps            |
| $\delta$                     | clock duty cycle             |                            | 45   | 50  | 55   | %             |
| $t_r$                        | rise time                    |                            | -    | -   | 3    | ns            |
| $t_f$                        | fall time                    |                            | -    | -   | 3    | ns            |

**Table 80. Dynamic characteristics: analog I/O pins DP and DM** $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ;  $C_L = 50\text{ pF}$ ;  $R_{PU} = 1.5\text{ k}\Omega$  on DP to  $V_{TERM}$ ; test circuit of [Figure 23](#); unless otherwise specified.

| Symbol                        | Parameter                                 | Conditions                                                 | Min                   | Typ | Max    | Unit |
|-------------------------------|-------------------------------------------|------------------------------------------------------------|-----------------------|-----|--------|------|
| <b>Driver characteristics</b> |                                           |                                                            |                       |     |        |      |
| <b>Full-speed mode</b>        |                                           |                                                            |                       |     |        |      |
| $t_{FR}$                      | rise time                                 | $C_L = 50\text{ pF}$ ; 10 % to 90 % of $ V_{OH} - V_{OL} $ | 4                     | -   | 20     | ns   |
| $t_{FF}$                      | fall time                                 | $C_L = 50\text{ pF}$ ; 90 % to 10 % of $ V_{OH} - V_{OL} $ | 4                     | -   | 20     | ns   |
| FRFM                          | differential rise time/fall time matching | $t_{FR}/t_{FF}$                                            | <sup>[1]</sup> 90     | -   | 111.11 | %    |
| $V_{CRS}$                     | output signal crossover voltage           |                                                            | <sup>[1][2]</sup> 1.3 | -   | 2.0    | V    |
| <b>High-speed mode</b>        |                                           |                                                            |                       |     |        |      |
| $t_{HSR}$                     | rise time (10 % to 90 %)                  | with captive cable                                         | 500                   | -   | -      | ps   |


**Table 80. Dynamic characteristics: analog I/O pins DP and DM ...continued**

$V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ;  $C_L = 50\text{ pF}$ ;  $R_{PU} = 1.5\text{ k}\Omega$  on DP to  $V_{TERM}$ ; test circuit of [Figure 23](#); unless otherwise specified.

| Symbol                    | Parameter                                                   | Conditions                                     | Min       | Typ | Max   | Unit |
|---------------------------|-------------------------------------------------------------|------------------------------------------------|-----------|-----|-------|------|
| $t_{HSF}$                 | fall time (10 % to 90 %)                                    | with captive cable                             | 500       | -   | -     | ps   |
| <b>Data source timing</b> |                                                             |                                                |           |     |       |      |
| <b>Full-speed mode</b>    |                                                             |                                                |           |     |       |      |
| $t_{FEOPT}$               | source SE0 interval of EOP                                  | see <a href="#">Figure 13</a>                  | [2] 160   | -   | 175   | ns   |
| $t_{FDEOP}$               | source jitter for differential transition to SE0 transition | see <a href="#">Figure 13</a>                  | [2] -2    | -   | +5    | ns   |
| <b>Receiver timing</b>    |                                                             |                                                |           |     |       |      |
| <b>Full-speed mode</b>    |                                                             |                                                |           |     |       |      |
| $t_{JR1}$                 | receiver jitter to next transition                          | see <a href="#">Figure 14</a>                  | [2] -18.5 | -   | +18.5 | ns   |
| $t_{JR2}$                 | receiver jitter for paired transitions                      | see <a href="#">Figure 14</a>                  | [2] -9    | -   | +9    | ns   |
| $t_{FEOPR}$               | receiver SE0 interval of EOP                                | accepted as EOP; see <a href="#">Figure 13</a> | [2] 82    | -   | -     | ns   |
| $t_{FST}$                 | width of SE0 interval during differential transition        | rejected as EOP; see <a href="#">Figure 15</a> | [2] -     | -   | 14    | ns   |

[1] Excluding the first transition from the idle state.



[2] Characterized only, not tested. Limits guaranteed by design.

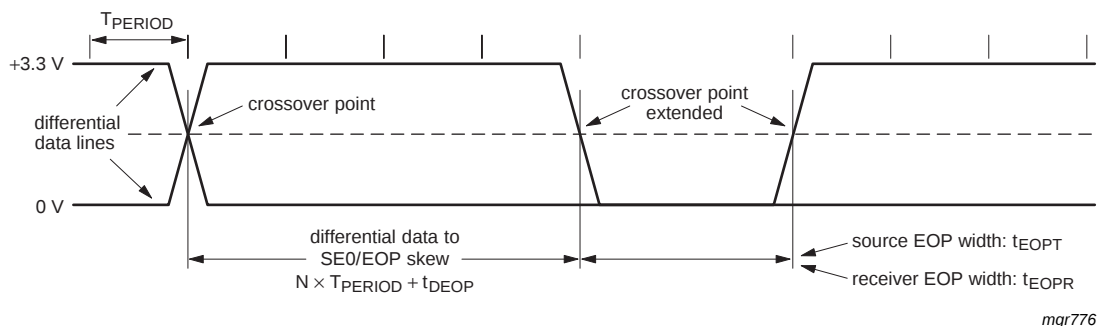

$T_{PERIOD}$  is the bit duration corresponding to the USB data rate.

Full-speed timing symbols have a subscript prefix 'F', low-speed timing symbols have a prefix 'L'.

**Fig 13. Source differential data-to-EOP transition skew and EOP width**

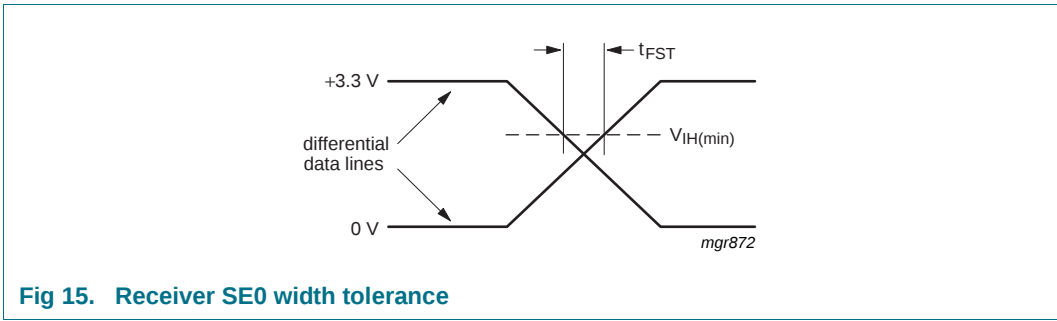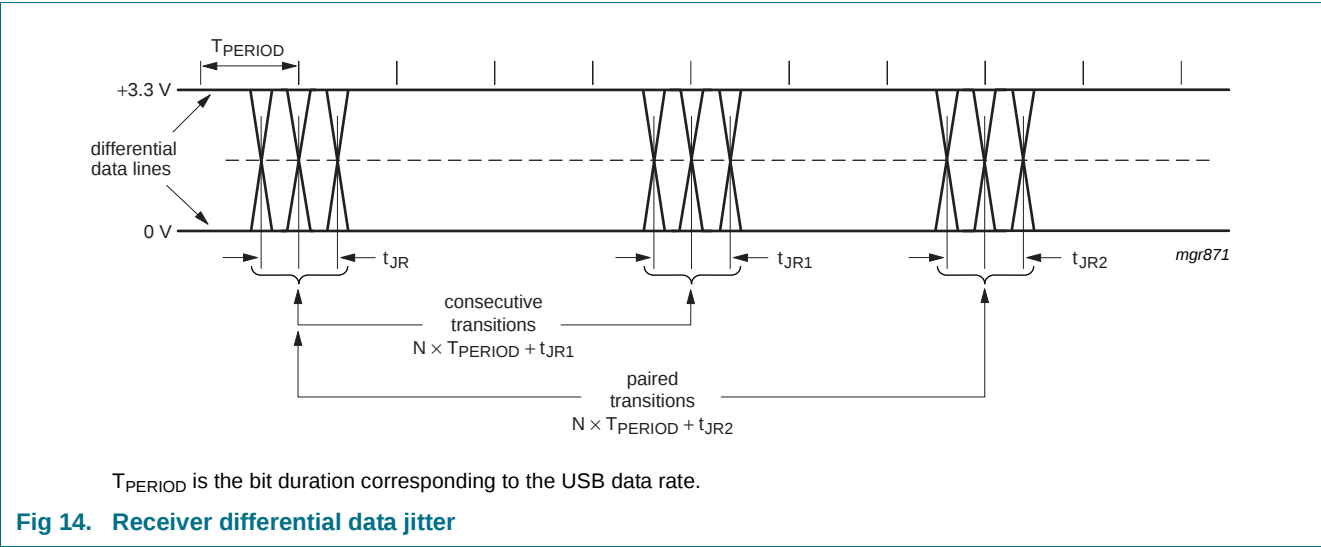

12.1 Register access timing

**Table 81. Register access timing parameters: separate address and data buses**  
 $V_{CC(I/O)} = V_{CC} = 3.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol         | Parameter                                   | Conditions   | Min | Typ | Max | Unit |
|----------------|---------------------------------------------|--------------|-----|-----|-----|------|
| <b>Reading</b> |                                             |              |     |     |     |      |
| $t_{RLRH}$     | RD_N LOW pulse width                        | $> t_{RLDV}$ | -   | -   | -   | ns   |
| $t_{AVRL}$     | address set-up time before RD_N LOW         |              | 0   | -   | -   | ns   |
| $t_{RHAX}$     | address hold time after RD_N HIGH           |              | 0   | -   | -   | ns   |
| $t_{RLDV}$     | RD_N LOW to data valid delay                |              | -   | -   | 26  | ns   |
| $t_{RHDZ}$     | RD_N HIGH to data outputs three-state delay |              | 0   | -   | 15  | ns   |
| $t_{RHSH}$     | RD_N HIGH to CS_N HIGH delay                |              | 0   | -   | -   | ns   |
| $t_{SLRL}$     | CS_N LOW to RD_N LOW delay                  |              | 2   | -   | -   | ns   |
| <b>Writing</b> |                                             |              |     |     |     |      |
| $t_{WLWH}$     | WR_N LOW pulse width                        |              | 15  | -   | -   | ns   |
| $t_{AVWL}$     | address set-up time before WR_N LOW         |              | 0   | -   | -   | ns   |
| $t_{WHAX}$     | address hold time after WR_N HIGH           |              | 0   | -   | -   | ns   |
| $t_{DVWH}$     | data set-up time before WR_N HIGH           |              | 11  | -   | -   | ns   |
| $t_{WHDZ}$     | data hold time after WR_N HIGH              |              | 5   | -   | -   | ns   |

Table 81. Register access timing parameters: separate address and data buses ...continued  
 $V_{CC(I/O)} = V_{CC} = 3.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol       | Parameter                    | Conditions | Min | Typ | Max | Unit |
|--------------|------------------------------|------------|-----|-----|-----|------|
| $t_{WHSH}$   | WR_N HIGH to CS_N HIGH delay |            | 0   | -   | -   | ns   |
| $t_{SLWL}$   | CS_N LOW to WR_N LOW delay   |            | 2   | -   | -   | ns   |
| General      |                              |            |     |     |     |      |
| $T_{cy(RW)}$ | read or write cycle time     |            | 50  | -   | -   | ns   |
| $t_{WHRL}$   | WR_N HIGH to RD_N LOW time   |            | 91  | -   | -   | ns   |

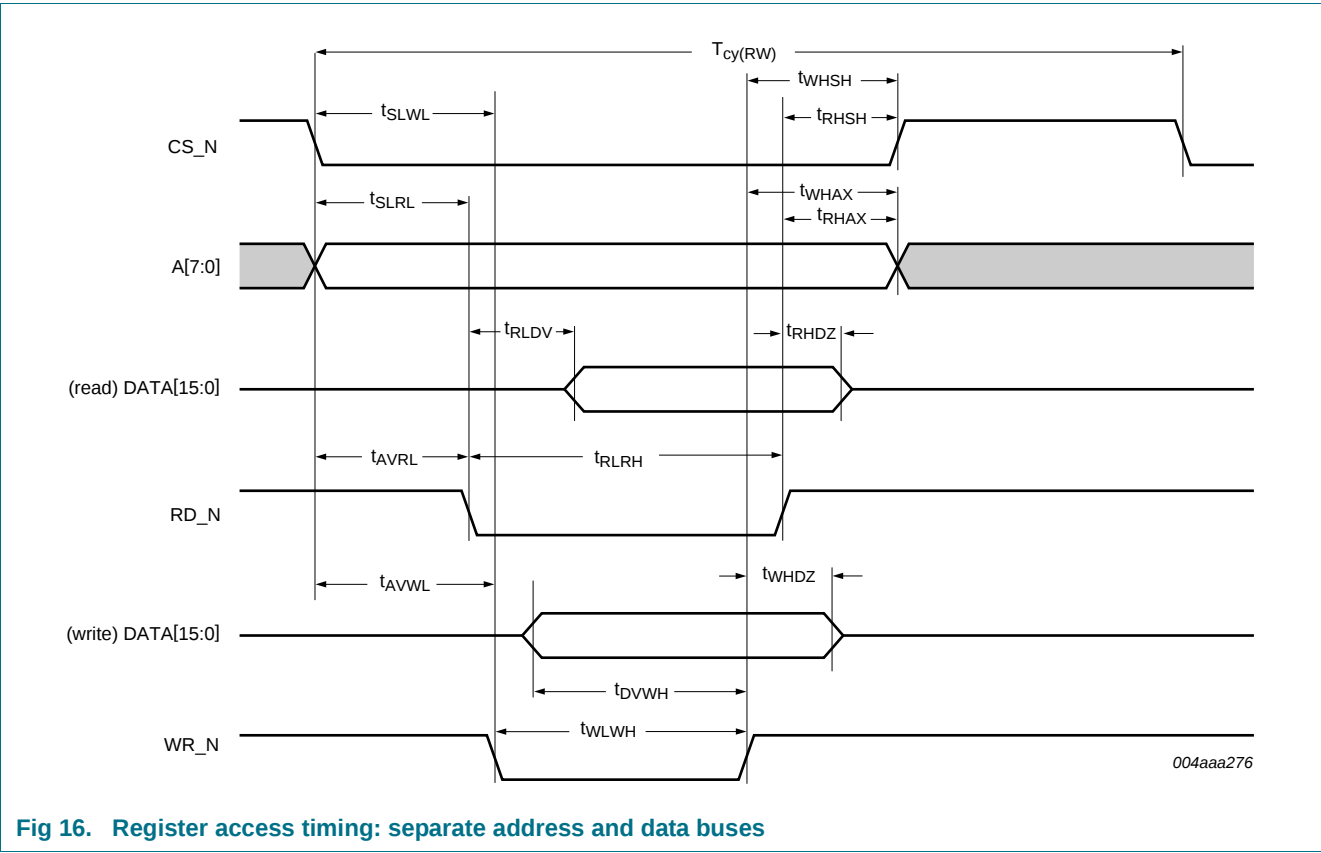


Fig 16. Register access timing: separate address and data buses

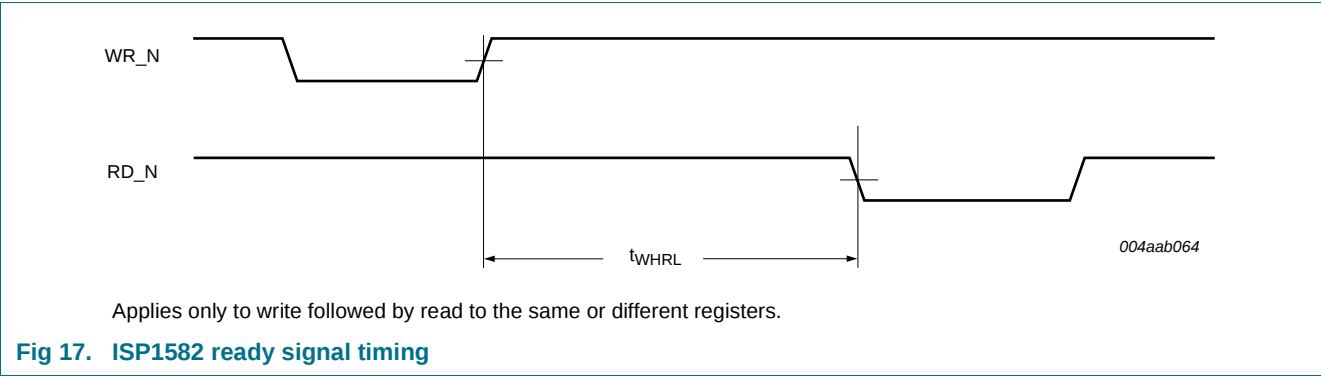



Fig 17. ISP1582 ready signal timing

## 12.2 DMA timing

**Table 82. GDMA mode timing parameters**

$V_{CC(I/O)} = V_{CC} = 3.3\text{ V}$ ;  $V_{GND} = 0\text{ V}$ ;  $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ; unless otherwise specified.

| Symbol    | Parameter                                    | Conditions | Min   | Typ | Max | Unit |
|-----------|----------------------------------------------|------------|-------|-----|-----|------|
| $T_{cy1}$ | read or write cycle time                     |            | 75    | -   | -   | ns   |
| $t_{su1}$ | DREQ set-up time before first DACK on        |            | 10    | -   | -   | ns   |
| $t_{d1}$  | DREQ on delay after last strobe off          |            | 33.33 | -   | -   | ns   |
| $t_{h1}$  | DREQ hold time after last strobe on          |            | 0     | -   | 53  | ns   |
| $t_{w1}$  | DIOR or DIOW pulse width                     |            | 39    | -   | 600 | ns   |
| $t_{w2}$  | DIOR/DIOW recovery time                      |            | 36    | -   | -   | ns   |
| $t_{d2}$  | read data valid delay after strobe on        |            | -     | -   | 20  | ns   |
| $t_{h2}$  | read data hold time after strobe off         |            | -     | -   | 5   | ns   |
| $t_{h3}$  | write data hold time after strobe off        |            | 1     | -   | -   | ns   |
| $t_{su2}$ | write data set-up time before strobe off     |            | 10    | -   | -   | ns   |
| $t_{su3}$ | DACK set-up time before DIOR/DIOW assertion  |            | 0     | -   | -   | ns   |
| $t_{a1}$  | DACK deassertion after DIOR/DIOW deassertion |            | 0     | -   | 30  | ns   |

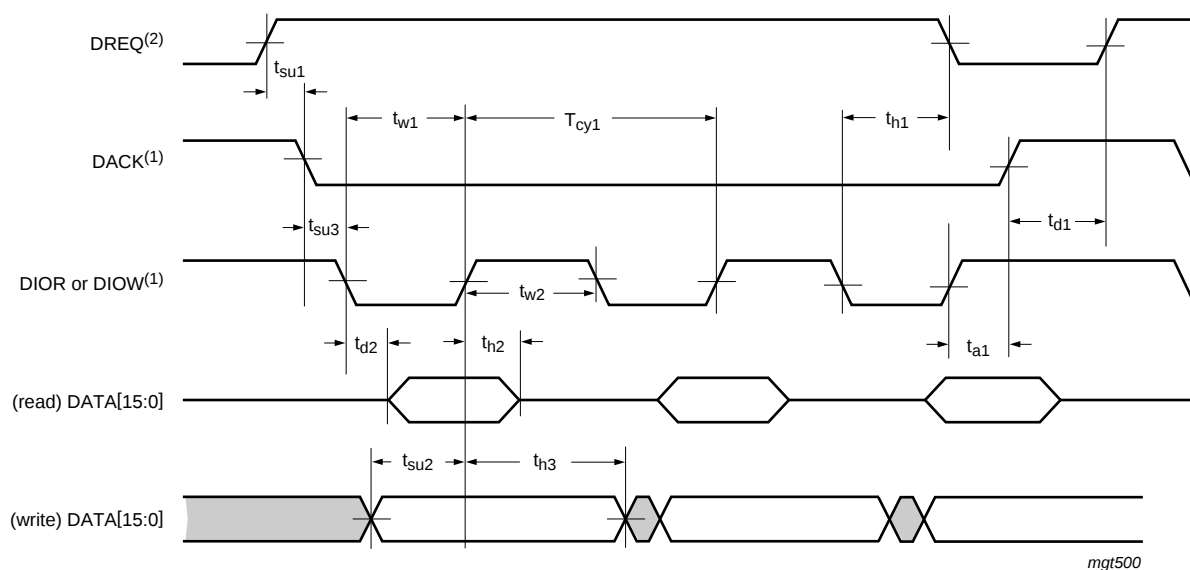


DREQ is continuously asserted, until the last transfer is done or the FIFO is full.

Data strobes: DIOR (read) and DIOW (write).

- (1) Programmable polarity: shown as active LOW.
- (2) Programmable polarity: shown as active HIGH.

**Fig 18. GDMA mode timing (bits MODE[1:0] = 00)**

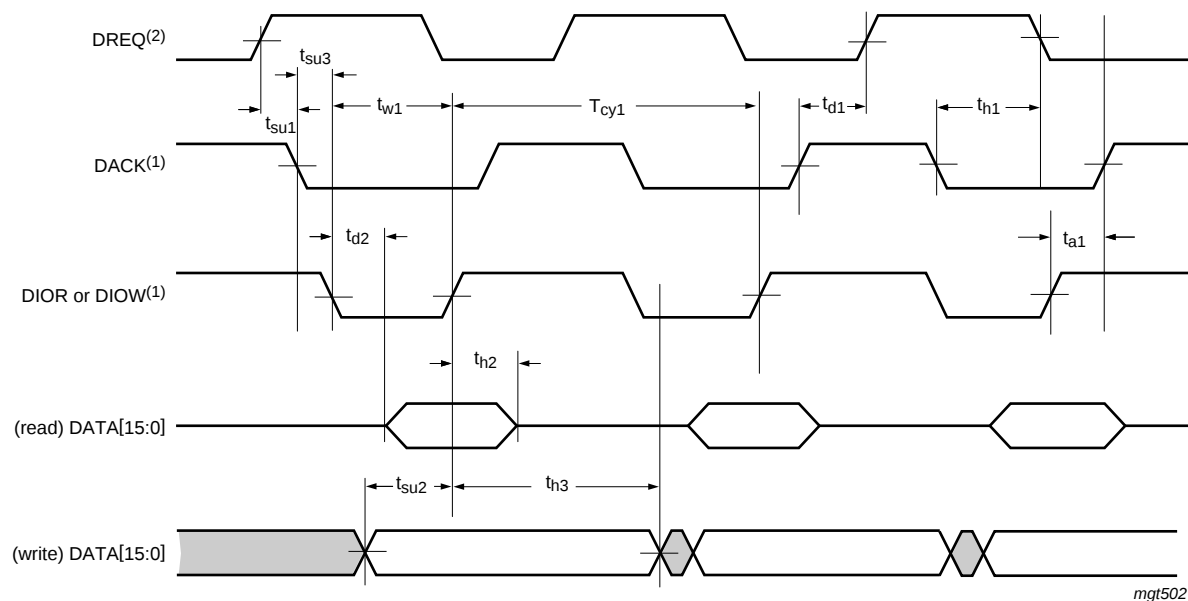


DREQ is asserted for every transfer.

Data strobes: DIOR (read) and DACK (write).

- (1) Programmable polarity: shown as active LOW.
- (2) Programmable polarity: shown as active HIGH.

**Fig 19. GDMA mode timing (bits MODE[1:0] = 01)**

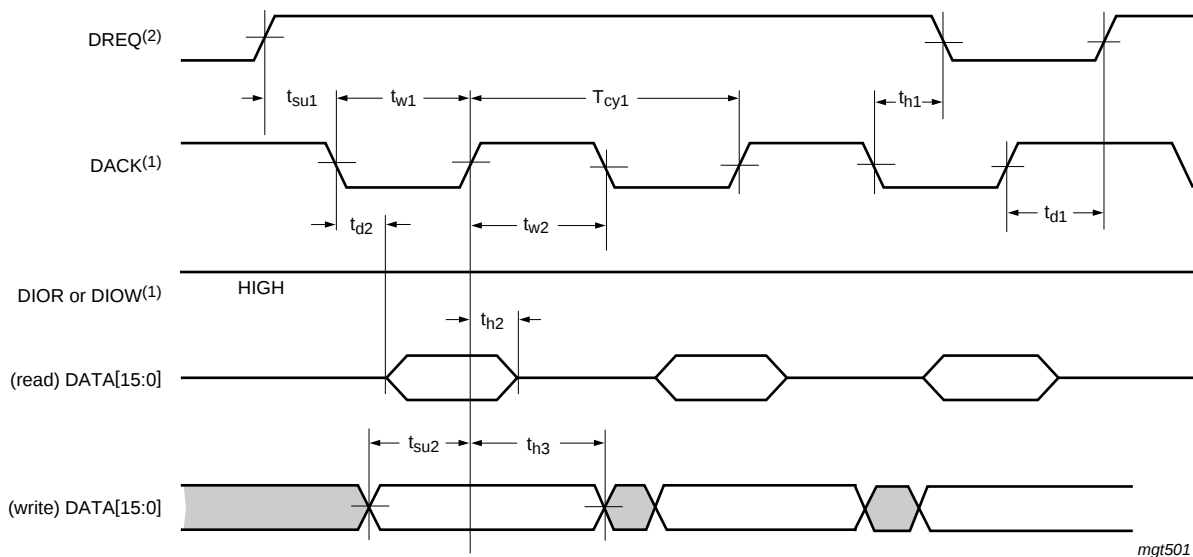


DREQ is continuously asserted, until the last transfer is done or the FIFO is full.


Data strobe: DACK (read/write).

- (1) Programmable polarity: shown as active LOW.
- (2) Programmable polarity: shown as active HIGH.

**Fig 20. GDMA mode timing (bits MODE[1:0] = 10)**

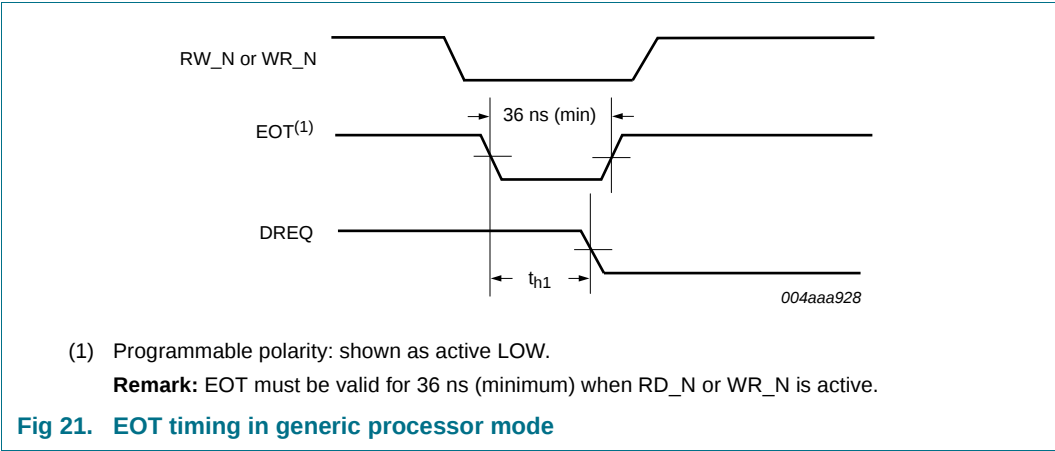


13. Application information

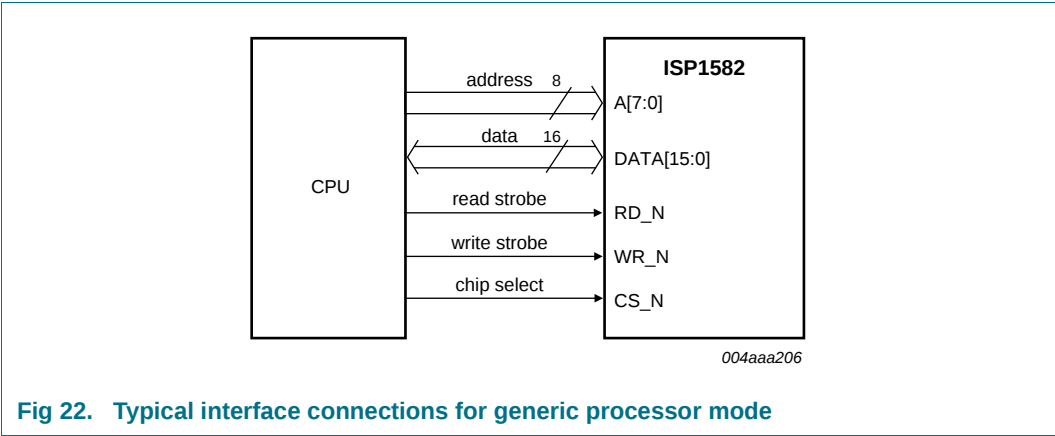

14. Test information


The dynamic characteristics of the analog I/O ports DP and DM were determined using the circuit shown in [Figure 23](#).

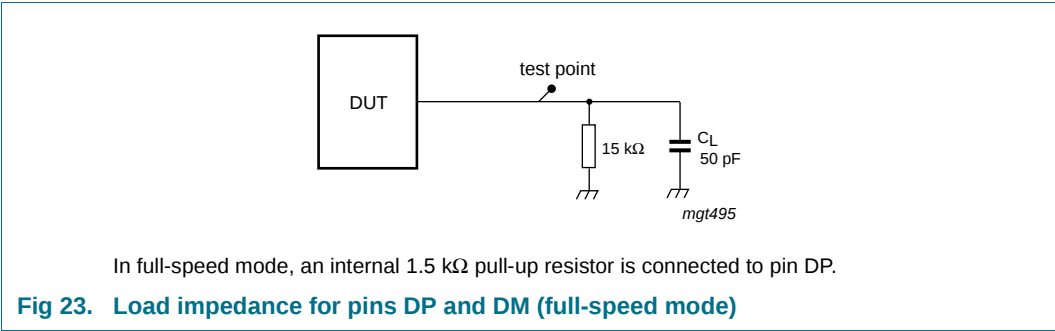

## 15. Package outline

**HVQFN56: plastic thermal enhanced very thin quad flat package; no leads; 56 terminals; body 8 x 8 x 0.85 mm**

**SOT684-1**

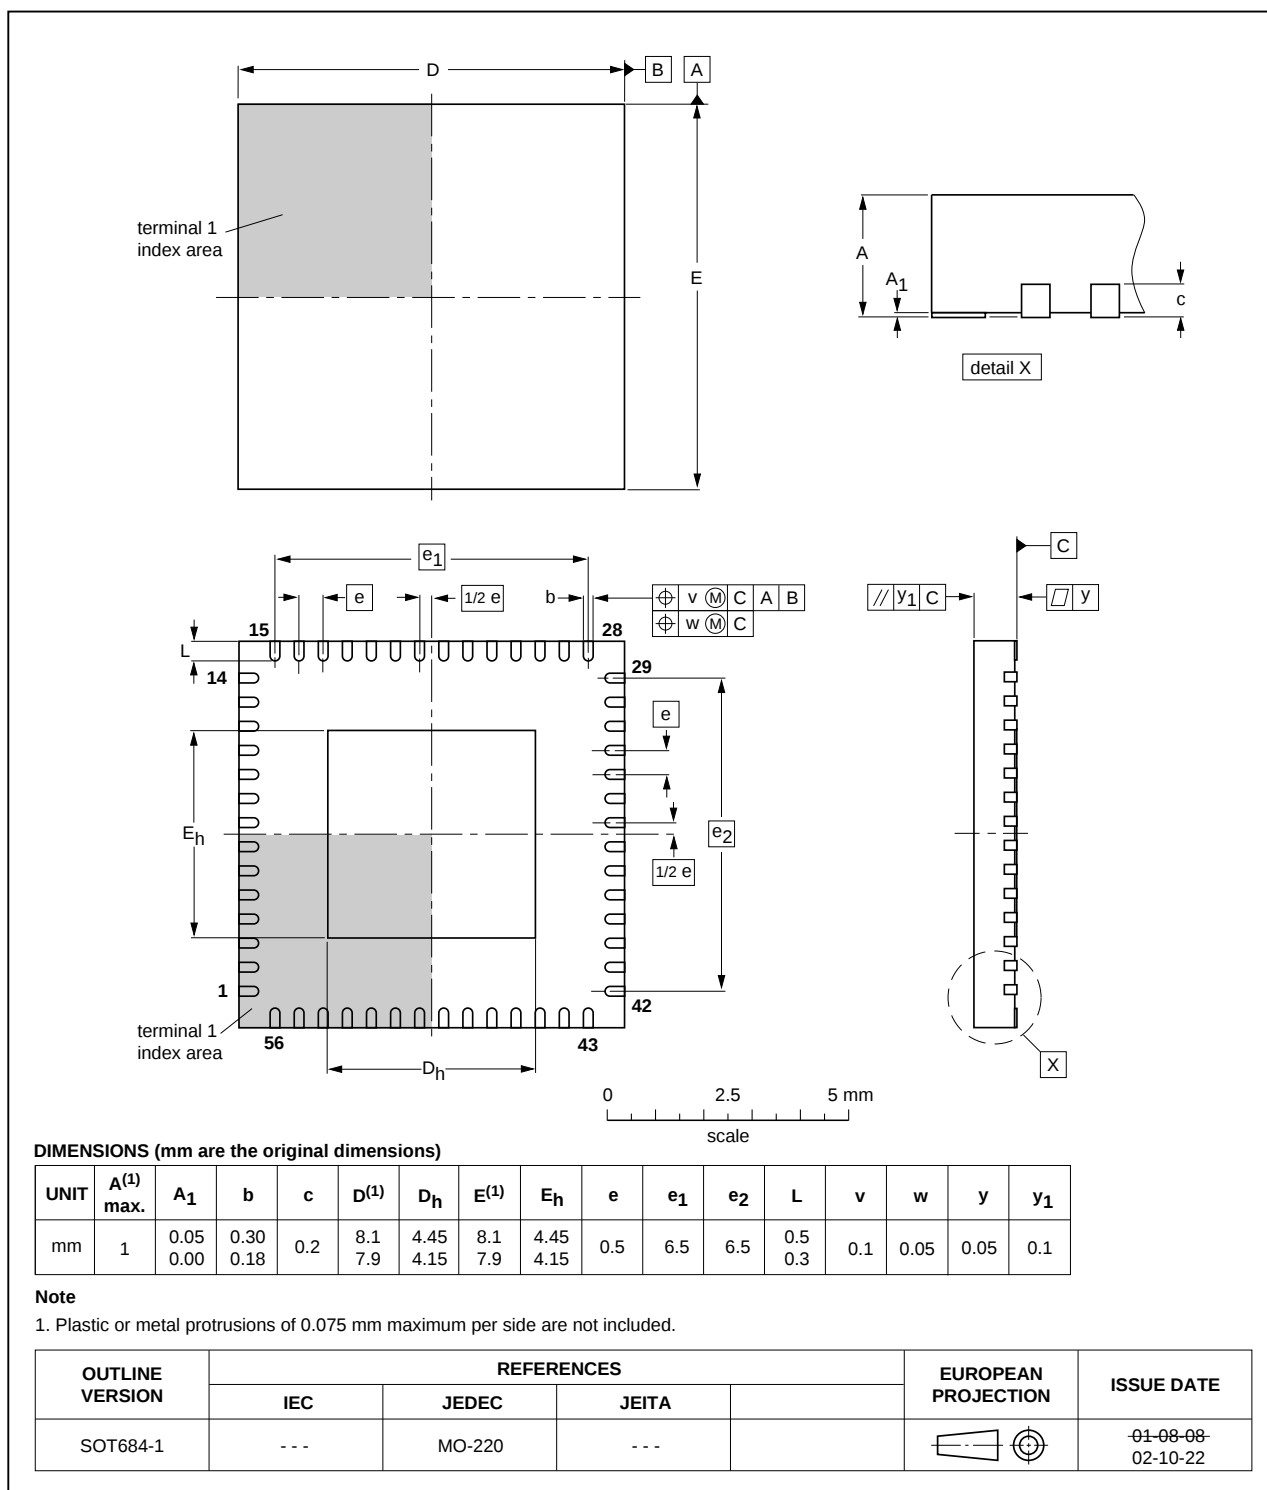

**Fig 24. Package outline SOT684-1 (HVQFN56)**

## 16. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note AN10365 “*Surface mount reflow soldering description*”.

### 16.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

### 16.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leadless or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leadless SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leadless packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

### 16.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

## 16.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 25](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 83](#) and [84](#)

**Table 83. SnPb eutectic process (from J-STD-020C)**


| Package thickness (mm) | Package reflow temperature (°C) |       |
|------------------------|---------------------------------|-------|
|                        | Volume (mm <sup>3</sup> )       |       |
|                        | < 350                           | ≥ 350 |
| < 2.5                  | 235                             | 220   |
| ≥ 2.5                  | 220                             | 220   |

**Table 84. Lead-free process (from J-STD-020C)**

| Package thickness (mm) | Package reflow temperature (°C) |             |        |
|------------------------|---------------------------------|-------------|--------|
|                        | Volume (mm <sup>3</sup> )       |             |        |
|                        | < 350                           | 350 to 2000 | > 2000 |
| < 1.6                  | 260                             | 260         | 260    |
| 1.6 to 2.5             | 260                             | 250         | 245    |
| > 2.5                  | 250                             | 245         | 245    |

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 25](#).

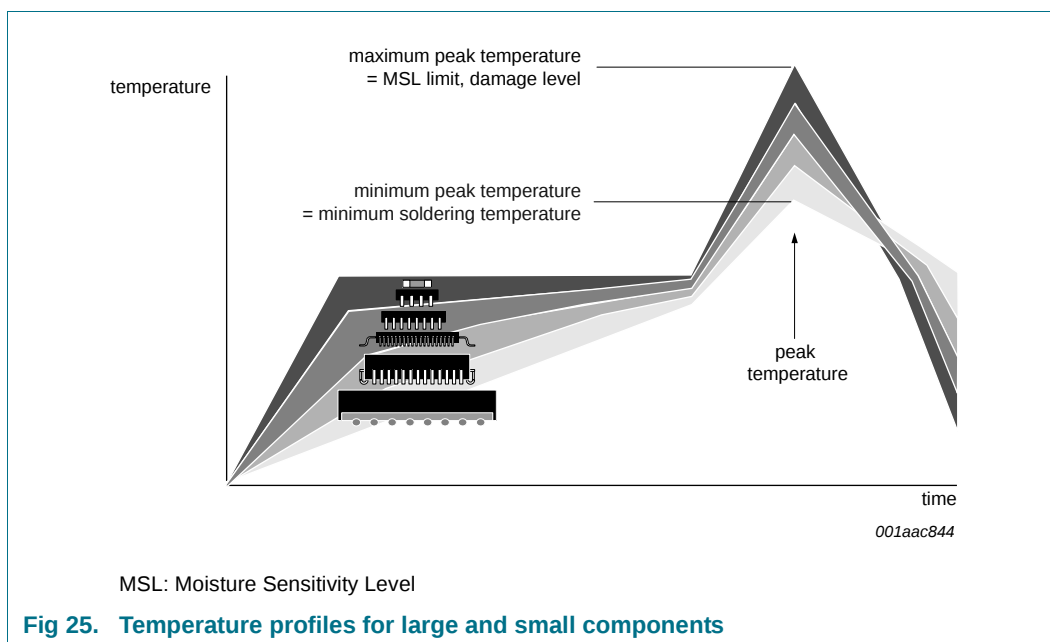

For further information on temperature profiles, refer to Application Note AN10365 “Surface mount reflow soldering description”.

## 17. Abbreviations

**Table 85. Abbreviations**

| Acronym | Description                                |
|---------|--------------------------------------------|
| ACK     | Acknowledgement                            |
| ACPI    | Advanced Configuration and Power Interface |
| ASIC    | Application-Specific Integrated Circuit    |
| CRC     | Cyclic Redundancy Code                     |
| DMA     | Direct Memory Access                       |
| EMI     | ElectroMagnetic Interference               |
| ESR     | Equivalent Series Resistance               |
| FS      | Full-Speed                                 |
| GDMA    | Generic DMA                                |
| HS      | High-Speed                                 |
| MMU     | Memory Management Unit                     |
| NAK     | Not Acknowledged                           |
| NRZI    | Non-Return-to-Zero Inverted                |
| NYET    | Not Yet                                    |
| OTG     | On-The-Go                                  |
| PCB     | Printed-Circuit Board                      |
| PHY     | Physical                                   |
| PID     | Packet IDentifier                          |
| PIE     | Parallel Interface Engine                  |

Table 85. Abbreviations ...continued

| Acronym | Description                 |
|---------|-----------------------------|
| PIO     | Parallel Input/Output       |
| PLL     | Phase-Locked Loop           |
| POR     | Power-On Reset              |
| RX      | Receive                     |
| SE0     | Single-Ended zero           |
| SIE     | Serial Interface Engine     |
| SRP     | Session Request Protocol    |
| TTL     | Transistor-Transistor Logic |
| TX      | Transmit                    |
| USB     | Universal Serial Bus        |

## 18. References

- [1] Universal Serial Bus Specification Rev. 2.0
- [2] On-The-Go Supplement to the USB Specification Rev. 1.3
- [3] Using ISP1582/3 in a composite device application with alternate settings (AN10071)
- [4] ISP1582/83 and ISP1761 clearing an IN buffer (AN10045)

## 19. Revision history

**Table 86. Revision history**

| Document ID                    | Release date                                                                                 | Data sheet status  | Change notice | Supersedes |
|--------------------------------|----------------------------------------------------------------------------------------------|--------------------|---------------|------------|
| ISP1582_8                      | 20090122                                                                                     | Product data sheet | -             | ISP1582_7  |
| Modifications:                 | Globally changed NXP Semiconductors and NXP to ST-NXP Wireless. Also updated the legal text. |                    |               |            |
| ISP1582_7                      | 20080922                                                                                     | Product data sheet | -             | ISP1582_6  |
| ISP1582_6                      | 20070920                                                                                     | Product data sheet | -             | ISP1582_5  |
| ISP1582_5                      | 20070201                                                                                     | Product data sheet | -             | ISP1582-04 |
| ISP1582-04<br>(9397 750 14033) | 20050104                                                                                     | Product data       | 200412038     | ISP1582-03 |
| ISP1582-03<br>(9397 750 13699) | 20040825                                                                                     | Preliminary data   | -             | ISP1582-02 |
| ISP1582-02<br>(9397 750 12979) | 20040629                                                                                     | Preliminary data   | -             | ISP1582-01 |
| ISP1582-01<br>(9397 750 11496) | 20040223                                                                                     | Preliminary data   | -             | -          |

## 20. Tables

|           |                                                        |    |           |                                                                       |    |
|-----------|--------------------------------------------------------|----|-----------|-----------------------------------------------------------------------|----|
| Table 1.  | Ordering information                                   | 2  | Table 50. | DMA Configuration register: bit description                           | 40 |
| Table 2.  | Pin description                                        | 4  | Table 51. | DMA Hardware register: bit allocation                                 | 40 |
| Table 3.  | Endpoint access and programmability                    | 8  | Table 52. | DMA Hardware register: bit description                                | 41 |
| Table 4.  | ISP1582 pin status                                     | 11 | Table 53. | DMA Interrupt Reason register: bit allocation                         | 41 |
| Table 5.  | ISP1582 output status                                  | 12 | Table 54. | DMA Interrupt Reason register: bit description                        | 42 |
| Table 6.  | Power modes                                            | 17 | Table 55. | Internal EOT-functional relation with bit<br>DMA_XFER_OK              | 42 |
| Table 7.  | Operation truth table for SoftConnect                  | 18 | Table 56. | DMA Interrupt Enable register: bit allocation                         | 42 |
| Table 8.  | Operation truth table for clock off during<br>suspend  | 18 | Table 57. | DMA Endpoint register: bit allocation                                 | 43 |
| Table 9.  | Operation truth table for back voltage<br>compliance   | 18 | Table 58. | DMA Endpoint register: bit description                                | 43 |
| Table 10. | Operation truth table for OTG                          | 19 | Table 59. | DMA Burst Counter register: bit allocation                            | 43 |
| Table 11. | Operation truth table for SoftConnect                  | 19 | Table 60. | DMA Burst Counter register: bit description                           | 44 |
| Table 12. | Operation truth table for clock off during<br>suspend  | 19 | Table 61. | Interrupt register: bit allocation                                    | 44 |
| Table 13. | Operation truth table for back voltage<br>compliance   | 20 | Table 62. | Interrupt register: bit description                                   | 45 |
| Table 14. | Operation truth table for OTG                          | 20 | Table 63. | Chip ID register: bit allocation                                      | 46 |
| Table 15. | Register overview                                      | 21 | Table 64. | Chip ID register: bit description                                     | 46 |
| Table 16. | Address register: bit allocation                       | 23 | Table 65. | Frame Number register: bit allocation                                 | 46 |
| Table 17. | Address register: bit description                      | 23 | Table 66. | Frame Number register: bit description                                | 47 |
| Table 18. | Mode register: bit allocation                          | 23 | Table 67. | Scratch register: bit allocation                                      | 47 |
| Table 19. | Mode register: bit description                         | 23 | Table 68. | Scratch register: bit description                                     | 47 |
| Table 20. | Status of the chip                                     | 24 | Table 69. | Unlock Device register: bit allocation                                | 47 |
| Table 21. | Interrupt Configuration register: bit allocation       | 25 | Table 70. | Unlock Device register: bit description                               | 48 |
| Table 22. | Interrupt Configuration register: bit description      | 25 | Table 71. | Test Mode register: bit allocation                                    | 48 |
| Table 23. | Debug mode settings                                    | 25 | Table 72. | Test Mode register: bit description                                   | 48 |
| Table 24. | OTG register: bit allocation                           | 25 | Table 73. | Limiting values                                                       | 49 |
| Table 25. | OTG register: bit description                          | 26 | Table 74. | Recommended operating conditions                                      | 49 |
| Table 26. | Interrupt Enable register: bit allocation              | 28 | Table 75. | Static characteristics: supply pins                                   | 49 |
| Table 27. | Interrupt Enable register: bit description             | 28 | Table 76. | Static characteristics: digital pins                                  | 50 |
| Table 28. | Endpoint Index register: bit allocation                | 29 | Table 77. | Static characteristics: OTG detection                                 | 50 |
| Table 29. | Endpoint Index register: bit description               | 30 | Table 78. | Static characteristics: analog I/O pins DP and<br>DM                  | 50 |
| Table 30. | Addressing of endpoint buffers                         | 30 | Table 79. | Dynamic characteristics                                               | 51 |
| Table 31. | Control Function register: bit allocation              | 30 | Table 80. | Dynamic characteristics: analog I/O pins DP and<br>DM                 | 51 |
| Table 32. | Control Function register: bit description             | 31 | Table 81. | Register access timing parameters: separate<br>address and data buses | 53 |
| Table 33. | Data Port register: bit allocation                     | 32 | Table 82. | GDMA mode timing parameters                                           | 55 |
| Table 34. | Data Port register: bit description                    | 32 | Table 83. | SnPb eutectic process (from J-STD-020C)                               | 60 |
| Table 35. | Buffer Length register: bit allocation                 | 33 | Table 84. | Lead-free process (from J-STD-020C)                                   | 60 |
| Table 36. | Buffer Length register: bit description                | 33 | Table 85. | Abbreviations                                                         | 61 |
| Table 37. | Buffer Status register: bit allocation                 | 34 | Table 86. | Revision history                                                      | 63 |
| Table 38. | Buffer Status register: bit description                | 34 |           |                                                                       |    |
| Table 39. | Endpoint MaxPacketSize register: bit<br>allocation     | 34 |           |                                                                       |    |
| Table 40. | Endpoint MaxPacketSize register: bit<br>description    | 35 |           |                                                                       |    |
| Table 41. | Endpoint Type register: bit allocation                 | 35 |           |                                                                       |    |
| Table 42. | Endpoint Type register: bit description                | 36 |           |                                                                       |    |
| Table 43. | Control bits for GDMA read/write (opcode =<br>00h/01h) | 37 |           |                                                                       |    |
| Table 44. | DMA Command register: bit allocation                   | 37 |           |                                                                       |    |
| Table 45. | DMA Command register: bit description                  | 37 |           |                                                                       |    |
| Table 46. | DMA commands                                           | 38 |           |                                                                       |    |
| Table 47. | DMA Transfer Counter register: bit allocation          | 38 |           |                                                                       |    |
| Table 48. | DMA Transfer Counter register: bit description         | 39 |           |                                                                       |    |
| Table 49. | DMA Configuration register: bit allocation             | 39 |           |                                                                       |    |

## 21. Figures

|         |                                                                                           |    |
|---------|-------------------------------------------------------------------------------------------|----|
| Fig 1.  | Block diagram . . . . .                                                                   | 3  |
| Fig 2.  | Pin configuration HVQFN56 (top view) . . . . .                                            | 4  |
| Fig 3.  | Interrupt logic . . . . .                                                                 | 13 |
| Fig 4.  | Behavior of bit GLINTENA . . . . .                                                        | 14 |
| Fig 5.  | Resistor and electrolytic or tantalum capacitor<br>needed for $V_{BUS}$ sensing . . . . . | 15 |
| Fig 6.  | Oscilloscope reading: no resistor and capacitor in<br>the network . . . . .               | 15 |
| Fig 7.  | Oscilloscope reading: with resistor and capacitor in<br>the network . . . . .             | 15 |
| Fig 8.  | POR timing . . . . .                                                                      | 16 |
| Fig 9.  | Clock with respect to the external POR . . . . .                                          | 16 |
| Fig 10. | ISP1582 with 3.3 V supply . . . . .                                                       | 17 |
| Fig 11. | Self-powered mode . . . . .                                                               | 18 |
| Fig 12. | Bus-powered mode . . . . .                                                                | 19 |
| Fig 13. | Source differential data-to-EOP transition skew and<br>EOP width . . . . .                | 52 |
| Fig 14. | Receiver differential data jitter . . . . .                                               | 53 |
| Fig 15. | Receiver SE0 width tolerance . . . . .                                                    | 53 |
| Fig 16. | Register access timing: separate address and data<br>buses . . . . .                      | 54 |
| Fig 17. | ISP1582 ready signal timing . . . . .                                                     | 54 |
| Fig 18. | GDMA mode timing (bits MODE[1:0] = 00) . . . . .                                          | 55 |
| Fig 19. | GDMA mode timing (bits MODE[1:0] = 01) . . . . .                                          | 56 |
| Fig 20. | GDMA mode timing (bits MODE[1:0] = 10) . . . . .                                          | 56 |
| Fig 21. | EOT timing in generic processor mode . . . . .                                            | 57 |
| Fig 22. | Typical interface connections for generic processor<br>mode . . . . .                     | 57 |
| Fig 23. | Load impedance for pins DP and DM (full-speed<br>mode) . . . . .                          | 57 |
| Fig 24. | Package outline SOT684-1 (HVQFN56) . . . . .                                              | 58 |
| Fig 25. | Temperature profiles for large and small<br>components . . . . .                          | 61 |

## 22. Contents

|          |                                                                 |           |           |                                                          |           |
|----------|-----------------------------------------------------------------|-----------|-----------|----------------------------------------------------------|-----------|
| <b>1</b> | <b>General description</b> . . . . .                            | <b>1</b>  | 8.3.1     | Endpoint Index register (address: 2Ch) . . . . .         | 29        |
| <b>2</b> | <b>Features</b> . . . . .                                       | <b>1</b>  | 8.3.2     | Control Function register (address: 28h) . . . . .       | 30        |
| <b>3</b> | <b>Applications</b> . . . . .                                   | <b>2</b>  | 8.3.3     | Data Port register (address: 20h) . . . . .              | 31        |
| <b>4</b> | <b>Ordering information</b> . . . . .                           | <b>2</b>  | 8.3.4     | Buffer Length register (address: 1Ch) . . . . .          | 32        |
| <b>5</b> | <b>Block diagram</b> . . . . .                                  | <b>3</b>  | 8.3.5     | Buffer Status register (address: 1Eh) . . . . .          | 33        |
| <b>6</b> | <b>Pinning information</b> . . . . .                            | <b>4</b>  | 8.3.6     | Endpoint MaxPacketSize register (address: 04h) . . . . . | 34        |
| 6.1      | Pinning . . . . .                                               | 4         | 8.3.7     | Endpoint Type register (address: 08h) . . . . .          | 35        |
| 6.2      | Pin description . . . . .                                       | 4         | 8.4       | DMA registers . . . . .                                  | 36        |
| <b>7</b> | <b>Functional description</b> . . . . .                         | <b>8</b>  | 8.4.1     | DMA Command register (address: 30h) . . . . .            | 37        |
| 7.1      | DMA interface, DMA handler and DMA registers . . . . .          | 9         | 8.4.2     | DMA Transfer Counter register (address: 34h) . . . . .   | 38        |
| 7.2      | Hi-Speed USB transceiver . . . . .                              | 9         | 8.4.3     | DMA Configuration register (address: 38h) . . . . .      | 39        |
| 7.3      | MMU and integrated RAM . . . . .                                | 9         | 8.4.4     | DMA Hardware register (address: 3Ch) . . . . .           | 40        |
| 7.4      | Microcontroller interface and microcontroller handler . . . . . | 9         | 8.4.5     | DMA Interrupt Reason register (address: 50h) . . . . .   | 41        |
| 7.5      | OTG SRP module . . . . .                                        | 9         | 8.4.6     | DMA Interrupt Enable register (address: 54h) . . . . .   | 42        |
| 7.6      | ST-NXP Wireless high-speed transceiver . . . . .                | 10        | 8.4.7     | DMA Endpoint register (address: 58h) . . . . .           | 43        |
| 7.6.1    | ST-NXP Wireless Parallel Interface Engine (PIE) . . . . .       | 10        | 8.4.8     | DMA Burst Counter register (address: 64h) . . . . .      | 43        |
| 7.6.2    | Peripheral circuit . . . . .                                    | 10        | 8.5       | General registers . . . . .                              | 44        |
| 7.6.3    | HS detection . . . . .                                          | 10        | 8.5.1     | Interrupt register (address: 18h) . . . . .              | 44        |
| 7.6.4    | Isolation . . . . .                                             | 10        | 8.5.2     | Chip ID register (address: 70h) . . . . .                | 46        |
| 7.7      | ST-NXP Wireless Serial Interface Engine (SIE) . . . . .         | 11        | 8.5.3     | Frame Number register (address: 74h) . . . . .           | 46        |
| 7.8      | SoftConnect . . . . .                                           | 11        | 8.5.4     | Scratch register (address: 78h) . . . . .                | 47        |
| 7.9      | Reconfiguring endpoints . . . . .                               | 11        | 8.5.5     | Unlock Device register (address: 7Ch) . . . . .          | 47        |
| 7.10     | System controller . . . . .                                     | 11        | 8.5.6     | Test Mode register (address: 84h) . . . . .              | 48        |
| 7.11     | Pins status . . . . .                                           | 11        | <b>9</b>  | <b>Limiting values</b> . . . . .                         | <b>49</b> |
| 7.12     | Interrupt . . . . .                                             | 12        | <b>10</b> | <b>Recommended operating conditions</b> . . . . .        | <b>49</b> |
| 7.12.1   | Interrupt output pin . . . . .                                  | 12        | <b>11</b> | <b>Static characteristics</b> . . . . .                  | <b>49</b> |
| 7.12.2   | Interrupt control . . . . .                                     | 14        | <b>12</b> | <b>Dynamic characteristics</b> . . . . .                 | <b>51</b> |
| 7.13     | V <sub>BUS</sub> sensing . . . . .                              | 14        | 12.1      | Register access timing . . . . .                         | 53        |
| 7.14     | Power-on reset . . . . .                                        | 15        | 12.2      | DMA timing . . . . .                                     | 55        |
| 7.15     | Power supply . . . . .                                          | 16        | <b>13</b> | <b>Application information</b> . . . . .                 | <b>57</b> |
| 7.15.1   | Self-powered mode . . . . .                                     | 18        | <b>14</b> | <b>Test information</b> . . . . .                        | <b>57</b> |
| 7.15.2   | Bus-powered mode . . . . .                                      | 19        | <b>15</b> | <b>Package outline</b> . . . . .                         | <b>58</b> |
| <b>8</b> | <b>Register description</b> . . . . .                           | <b>21</b> | <b>16</b> | <b>Soldering of SMD packages</b> . . . . .               | <b>59</b> |
| 8.1      | Register access . . . . .                                       | 22        | 16.1      | Introduction to soldering . . . . .                      | 59        |
| 8.2      | Initialization registers . . . . .                              | 22        | 16.2      | Wave and reflow soldering . . . . .                      | 59        |
| 8.2.1    | Address register (address: 00h) . . . . .                       | 22        | 16.3      | Wave soldering . . . . .                                 | 59        |
| 8.2.2    | Mode register (address: 0Ch) . . . . .                          | 23        | 16.4      | Reflow soldering . . . . .                               | 60        |
| 8.2.3    | Interrupt Configuration register (address: 10h) . . . . .       | 24        | <b>17</b> | <b>Abbreviations</b> . . . . .                           | <b>61</b> |
| 8.2.4    | OTG register (address: 12h) . . . . .                           | 25        | <b>18</b> | <b>References</b> . . . . .                              | <b>62</b> |
| 8.2.4.1  | Session Request Protocol (SRP) . . . . .                        | 27        | <b>19</b> | <b>Revision history</b> . . . . .                        | <b>63</b> |
| 8.2.5    | Interrupt Enable register (address: 14h) . . . . .              | 27        | <b>20</b> | <b>Tables</b> . . . . .                                  | <b>64</b> |
| 8.3      | Data flow registers . . . . .                                   | 29        | <b>21</b> | <b>Figures</b> . . . . .                                 | <b>65</b> |
|          |                                                                 |           | <b>22</b> | <b>Contents</b> . . . . .                                | <b>66</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© ST-NXP Wireless 2009.

All rights reserved.

For more information, please visit: <http://www.stnwireless.com>

Date of release: 22 January 2009

Document identifier: ISP1582\_8

**Please Read Carefully:**

Information in this document is provided solely in connection with ST-NXP products. ST-NXP Wireless NV and its subsidiaries ("ST-NXP") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST-NXP products are sold pursuant to ST-NXP's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST-NXP products and services described herein, and ST-NXP assumes no liability whatsoever relating to the choice, selection or use of the ST-NXP products and services described herein. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST-NXP for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST-NXP'S TERMS AND CONDITIONS OF SALE ST-NXP DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST-NXP PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST-NXP REPRESENTATIVE, ST-NXP PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST-NXP PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST-NXP products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST-NXP for the ST-NXP product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST-NXP.

ST-NXP and the ST-NXP logo are trademarks or registered trademarks of ST-NXP in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST-NXP logo is a registered trademark of ST-NXP Wireless. All other names are the property of their respective owners.

© 2009 ST-NXP Wireless - All rights reserved

ST-NXP Wireless group of companies

Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - India - Italy - Japan - Korea - Malaysia - Mexico -  
Netherlands - Singapore - Sweden - Switzerland - Taiwan - United Kingdom - United States of America

[www.stnwireless.com](http://www.stnwireless.com)