


Package Dimension

MSB

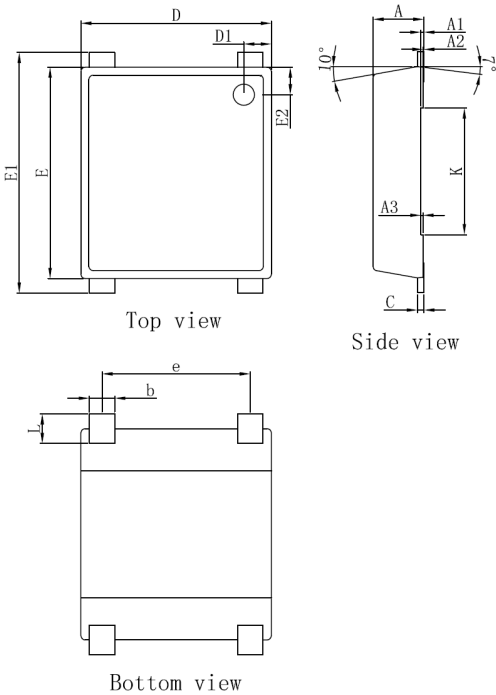

MSB			
Dim.	Min.	Typ.	Max.
A	1.10	1.20	1.30
A1	0.05	---	0.08
A2	0.00	0.02	0.05
A3	0.03	0.05	0.08
C	0.12	0.15	0.18
D	4.40	4.5	4.60
D1	0.60	0.65	0.70
E	4.90	5.00	5.10
E1	5.60	5.70	5.80
E2	0.60	0.65	0.70
L	0.65	0.70	0.75
b	0.55	0.60	0.70
e	3.45	3.50	3.55
K	2.95	3.00	3.05
All dimensions in millimeter			

FIG.1-FORWARD CURRENT DERATING CURVE

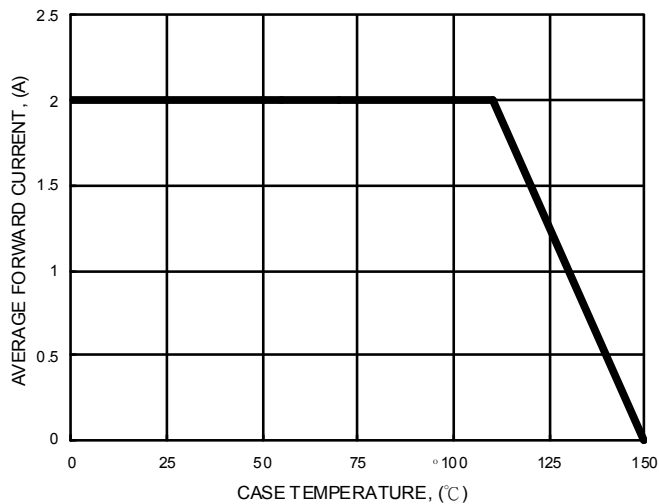


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

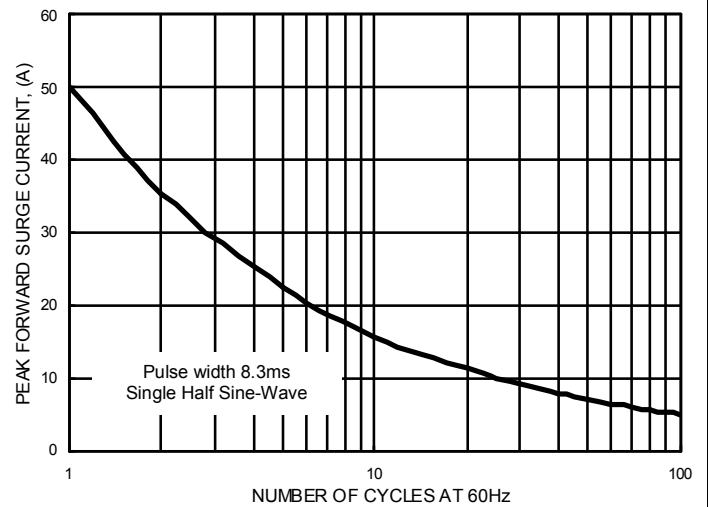


FIG.3- TYPICAL FORWARD CHARACTERISTICS

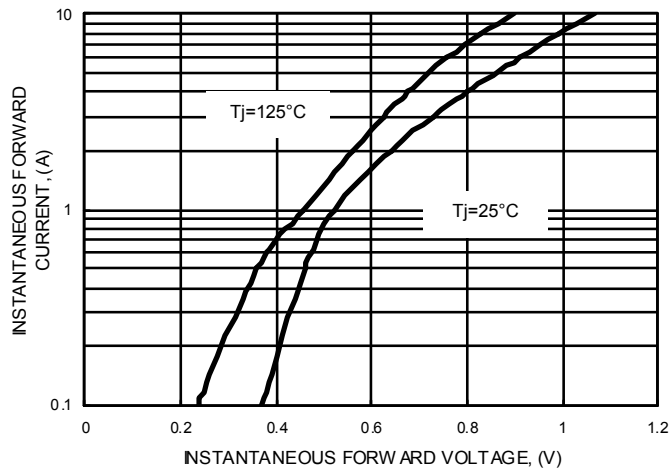


FIG.4- TYPICAL JUNCTION CAPACITANCE


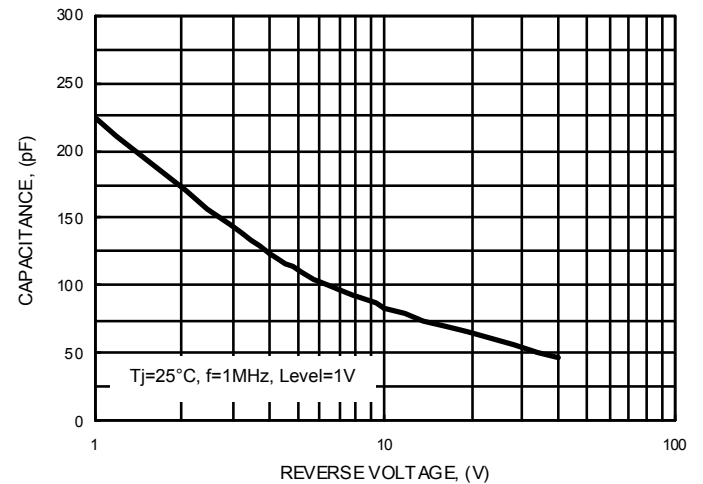



FIG.5- TYPICAL REVERSE CHARACTERISTICS

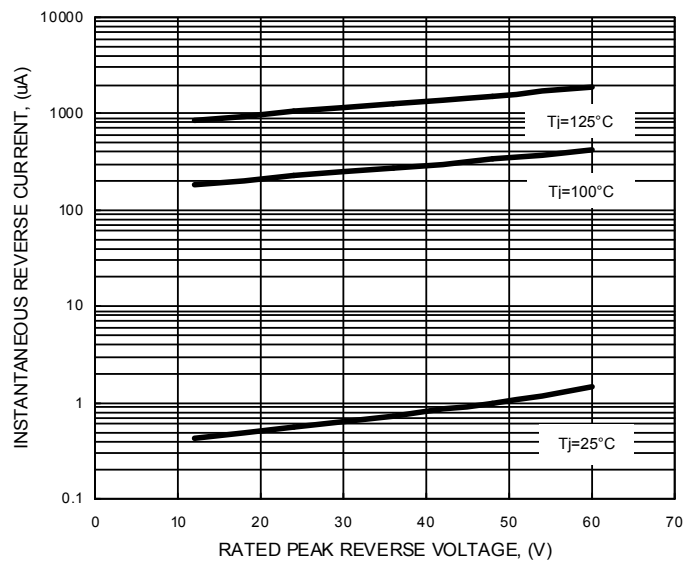


Packaging Information

DEVICE	Q'TY/REEL (PCS)	REEL DIA. (mm)	BOX SIZE (mm)	Q'TY/BOX (PCS)	CARTON SIZE (mm)	Q'TY/CARTON (PCS)	MOQ
MSK260	3000	330	334x334x21	3000	365x365x355	36K	36K

Polar Units

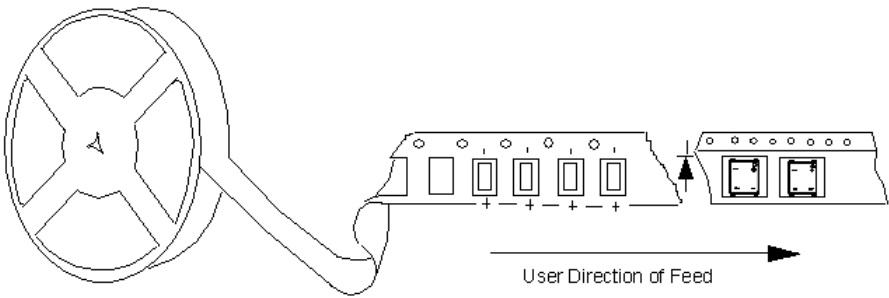

Embossed Carrier Dimension

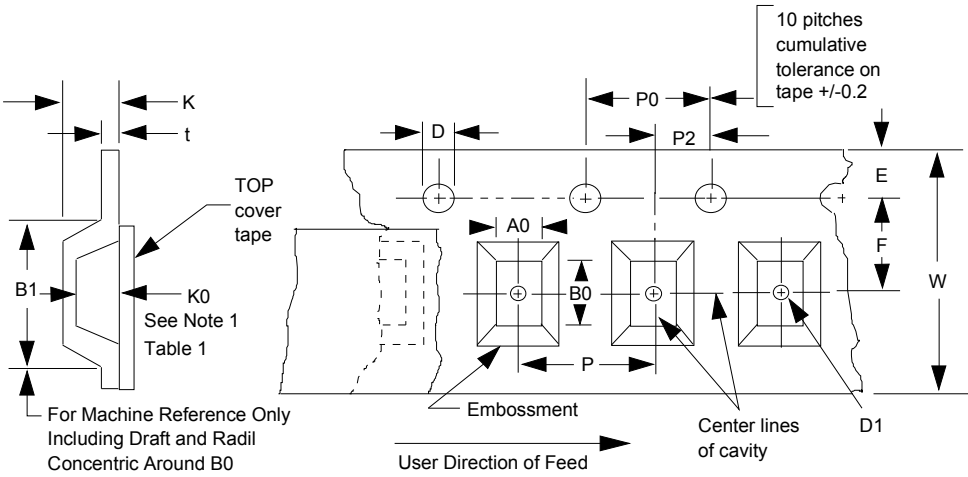

UNIT: mm

TAPE SIZE	D	E	PO	t (MAX)	A0	B0	K0
12mm	1.55+0.10/-0.0	1.75+/-0.10	4.0+/-0.10	0.4	4.8+/-0.1	6.0+/-0.1	1.5+/-0.1
	B1 (MAX)	D1 (MIN)	F	K (MAX)	P2	W	P
	8.2	1.5	5.5+/-0.1	2.2	2.0+/-0.05	12.0+/-0.30	8.0+/-0.1

Typical IR Reflow Soldering Thermal Profile

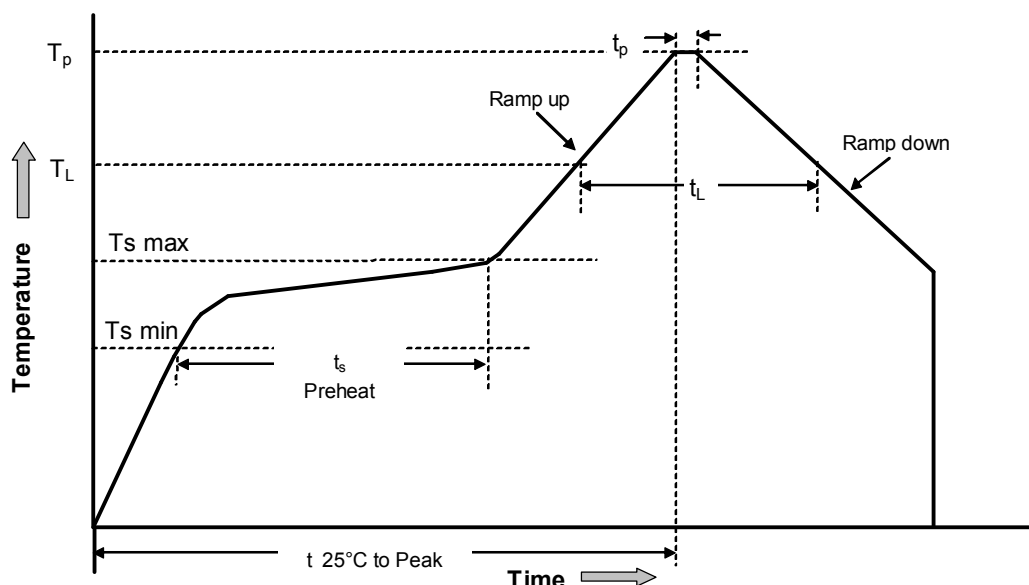


Table 1- Reflow profile

Reflow condition	Sn-Pb assembly	Pb-free assembly
Average ramp-up rate (Liquidus Temperature (TL) to Peak)	3 °C/second max.	3 °C/second max.
Preheat		
--Temperature Min, Ts (Min)	100 °C	150 °C
--Temperature Max, Ts (Max)	150 °C	200 °C
--Time (min to max, ts)	60-120 seconds	60-180 seconds
Ts(max) to TL		3 °C/second max.
- Ramp-up Rate		
Time maintained above:		
--Temperature(TL)	183 °C	217 °C
--Time(tL)	60-150 seconds	60-150 seconds
Peak Temperature (Tp)	240 +0/-5 °C	260 +0/-5 °C
Time within 5 °C of actual Peak Temperature(tp)	10-30 seconds	20-40 seconds
Ramp-down Rate	6 °C/second max.	6 °C/second max.
Time 25 °C to Peak Temperature.	6 minutes max.	8 minutes max.

Note: All temperatures refer to topside of the package, measured on the package body surface

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.