

Applications

- Cellular and Picture Phones

Product Features

- OmniPixel3-HS structure using 0.11 μm process
- optical size of 1/13"
- automatic/manual control of automatic exposure control (AEC), automatic gain control (AGC), automatic 50/60 Hz luminance detection and automatic black level calibration (ABLC)
- support for horizontal and vertical sub-sampling
- mirror, flip, scaling, windowing
- image quality controls: color saturation, hue, gamma, sharpness (edge enhancement), lens correction, defective pixel canceling, and noise canceling
- programmable gamma correction
- support for black sun cancellation
- digital video port (DVP) parallel output interface
- MIPI serial output interface
- serial camera control bus (SCCB) interface
- programmable I/O drive capability
- on-chip phase lock loop (PLL)
- 2.8V power supply
- built-in 1.5V regulator for sensor core power
- low power consumption

OVM7692




Ordering Information

- **OVM7692-RYAA**
(color, lead-free, CameraCubeChip™ with metal can)
- **OVM7692-RYCA**
(color, lead-free, CameraCubeChip™ with metal can)
- **OVM7692-RAAA**
(color, lead-free, CameraCubeChip™ with black coating)
- **OVM7692-RACA**
(color, lead-free, CameraCubeChip™ with black coating)

Product Specifications

- active array size: 640 x 480
- power supply:
 - analog: 2.6 - 3.0V
 - I/O: 1.7 - 3.0V
- power requirements:
 - active: -120 mW @ AVDD = 2.8V, DOVDD = 1.8V
 - standby: 23 μA
- temperature range:
 - operating: -30°C to 70°C junction temperature
 - stable image: 0°C to 50°C junction temperature
- output formats: RAW 8-bit, RAW 10-bit (for MIPI only), YUV422, RGB565/444
- optical format: 1/13"
- diagonal field of view (FOV):
 - RYAA/RAAA: 64°
 - RYCA/RACA: 71.9°
- f no.:
 - RYAA/RAAA: F/3.0
 - RYCA/RACA: F/2.8
- focal length:
 - RYAA/RAAA: 1.15 mm
 - RYCA/RACA: 1.10 mm
- input clock frequency: 6 - 27 MHz, 54 MHz
- max S/N ratio: 38 dB
- dynamic range: 66 dB
- maximum image transfer rate:
 - VGA (640x480): 30 fps
 - CIF (352x288): 30 fps
 - QVGA (320x240): 60 fps
 - QCIF (176x144): 60 fps
- sensitivity: 960 mV/lux-sec
- scan mode: progressive
- maximum exposure interval: 511 x t_{row}
- pixel size: 1.75 μm x 1.75 μm
- dark current: 10 mV/sec @ 60°C junction temperature
- image area: 1148 μm x 861 μm
- package dimensions (including ball height):
 - RYAA: 3470 x 2950 x 2760 μm
 - RAAA: 3179 x 2815 x 2600 μm
 - RYCA: 3450 x 2820 x 2350 μm
 - RACA: 3180 x 2820 x 2060 μm

Functional Block Diagram

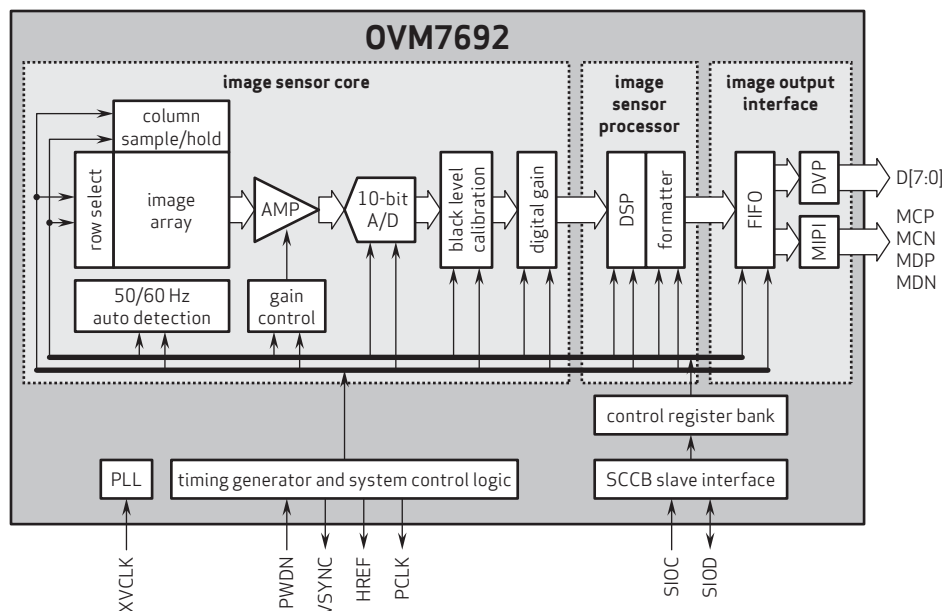

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. CameraCubeChip and OmniPixel3-HS are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

Version 1.7, March, 2013

OmniVision