

## PROTECTION PRODUCTS

### Absolute Maximum Rating

| Rating                                   | Symbol    | Value         | Units |
|------------------------------------------|-----------|---------------|-------|
| Peak Pulse Power ( $t_p = 8/20\mu s$ )   | $P_{pk}$  | 300           | Watts |
| Peak Pulse Current ( $t_p = 8/20\mu s$ ) | $I_{pp}$  | 20            | A     |
| Lead Soldering Temperature               | $T_L$     | 260 (10 sec.) | °C    |
| Operating Temperature                    | $T_J$     | -55 to +125   | °C    |
| Storage Temperature                      | $T_{STG}$ | -55 to +150   | °C    |


### Electrical Characteristics (T=25°C)

| SMDA05CN-5                 |           |                                                     |         |         |         |         |
|----------------------------|-----------|-----------------------------------------------------|---------|---------|---------|---------|
| Parameter                  | Symbol    | Conditions                                          | Minimum | Typical | Maximum | Units   |
| Reverse Stand-Off Voltage  | $V_{RWM}$ |                                                     |         |         | 5       | V       |
| Reverse Breakdown Voltage  | $V_{BR}$  | $I_t = 1mA$                                         | 6       |         |         | V       |
| Reverse Leakage Current    | $I_R$     | $V_{RWM} = 5V, T=25^\circ C$                        |         |         | 10      | $\mu A$ |
| Clamping Voltage           | $V_C$     | $I_{pp} = 1A, t_p = 8/20\mu s$                      |         |         | 9.8     | V       |
| Clamping Voltage           | $V_C$     | $I_{pp} = 10A, t_p = 8/20\mu s$                     |         |         | 11      | V       |
| Maximum Peak Pulse Current | $I_{pp}$  | $t_p = 8/20\mu s$                                   |         |         | 20      | A       |
| Junction Capacitance       | $C_J$     | Between I/O Pins and Ground<br>$V_R = 0V, f = 1MHz$ |         |         | 350     | pF      |
| SMDA15CN-5                 |           |                                                     |         |         |         |         |
| Parameter                  | Symbol    | Conditions                                          | Minimum | Typical | Maximum | Units   |
| Reverse Stand-Off Voltage  | $V_{RWM}$ |                                                     |         |         | 15      | V       |
| Reverse Breakdown Voltage  | $V_{BR}$  | $I_t = 1mA$                                         | 16.7    |         |         | V       |
| Reverse Leakage Current    | $I_R$     | $V_{RWM} = 15V, T=25^\circ C$                       |         |         | 1       | $\mu A$ |
| Clamping Voltage           | $V_C$     | $I_{pp} = 1A, t_p = 8/20\mu s$                      |         |         | 24      | V       |
| Clamping Voltage           | $V_C$     | $I_{pp} = 10A, t_p = 8/20\mu s$                     |         |         | 30      | V       |
| Maximum Peak Pulse Current | $I_{pp}$  | $t_p = 8/20\mu s$                                   |         |         | 10      | A       |
| Junction Capacitance       | $C_J$     | Between I/O Pins and Ground<br>$V_R = 0V, f = 1MHz$ |         |         | 75      | pF      |


## PROTECTION PRODUCTS

### Typical Characteristics


**Non-Repetitive Peak Pulse Power vs. Pulse Time**

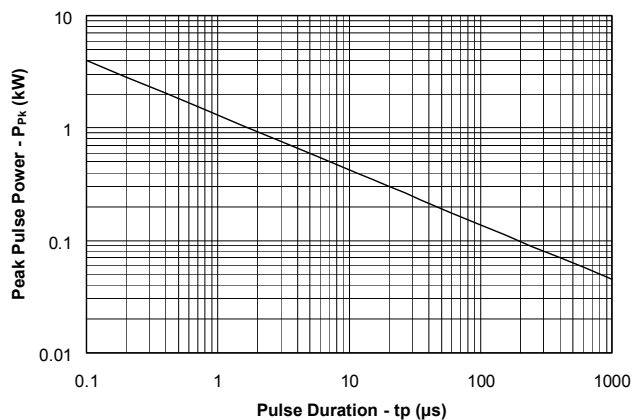


**Power Derating Curve**

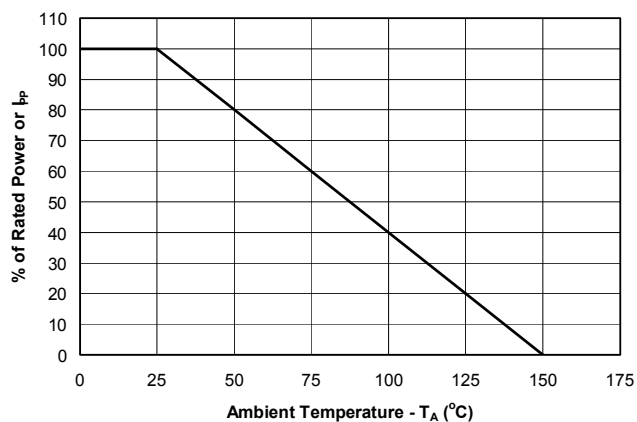

**Pulse Waveform**

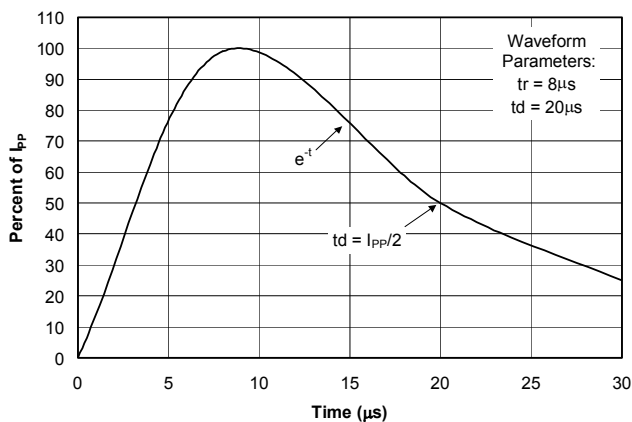

**Clamping Voltage vs. Peak Pulse Current**

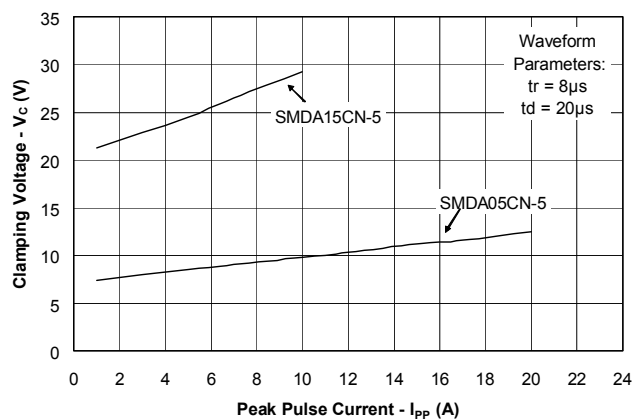

## PROTECTION PRODUCTS

### Applications Information

#### Device Connection Options for Protection of Four or Five Data Lines

The SMDAxxCN-5 can be configured to protect either four or five bidirectional data lines. The options for connecting the devices are as follows:


1. Bidirectional protection of four I/O lines is achieved by connecting pins 1, 2, 3, and 4 to the data lines. Pins 5, 6, 7, and 8 are connected to ground. The ground connection should be made directly to the ground plane for best results. The path length is kept as short as possible to reduce the effects of parasitic inductance in the board traces. In this configuration, the device can withstand the maximum specified transient impulse on four lines simultaneously.
2. Bidirectional protection of five I/O lines is achieved by connecting pins 1, 2, 3, 4, and 5 to the data lines. Pins 6, 7, and 8 are connected to ground. The ground connection should be made directly to the circuit board ground plane for best results. In this configuration, the device can withstand the maximum rated transient impulse on any two lines simultaneously.

#### Circuit Board Layout Recommendations for Suppression of ESD.


Good circuit board layout is critical for the suppression of ESD induced transients. The following guidelines are recommended:

- Place the TVS near the input terminals or connectors to restrict transient coupling.
- Minimize the path length between the TVS and the protected line.
- Minimize all conductive loops including power and ground loops.
- The ESD transient return path to ground should be kept as short as possible.
- Never run critical signals near board edges.
- Use ground planes whenever possible.

#### Protection for Four Bidirectional Lines

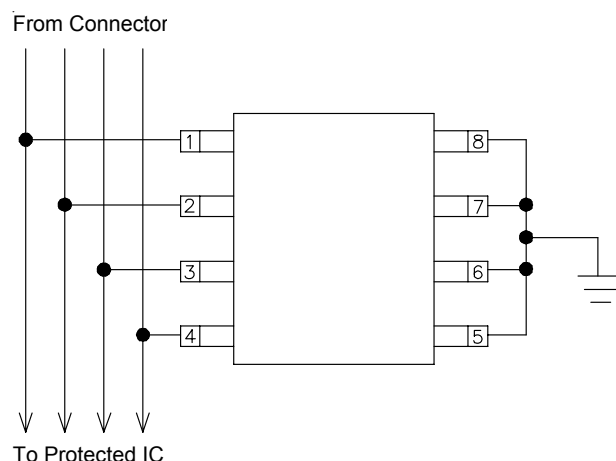

#### Protection for Five Bidirectional Lines


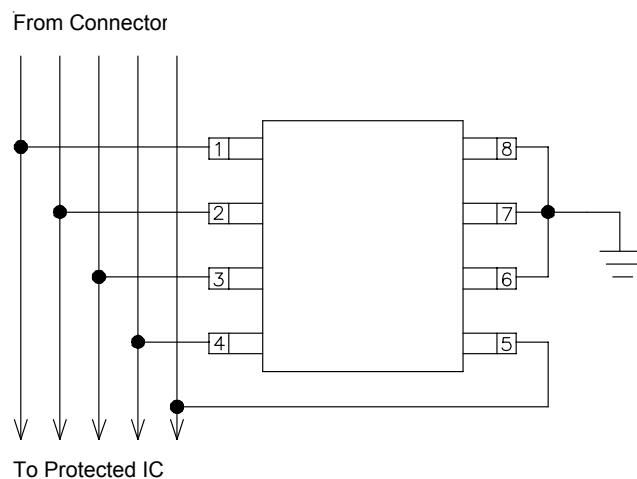


#### Matte Tin Lead Finish

Matte tin has become the industry standard lead-free replacement for SnPb lead finishes. A matte tin finish is composed of 100% tin solder with large grains. Since the solder volume on the leads is small compared to the solder paste volume that is placed on the land pattern of the PCB, the reflow profile will be determined by the requirements of the solder paste. Therefore, these devices are compatible with both lead-free and SnPb assembly techniques. In addition, unlike other lead-free compositions, matte tin does not have any added alloys that can cause degradation of the solder joint.

## PROTECTION PRODUCTS

### Outline Drawing - S0-8

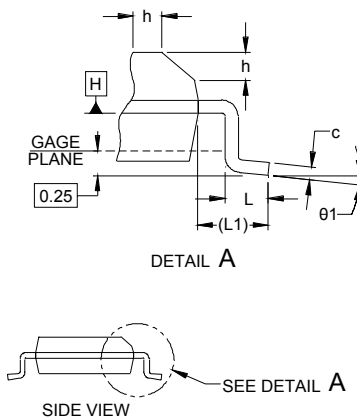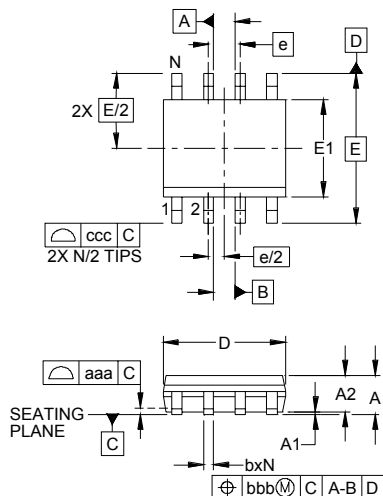


| DIM | INCHES   |      |      | MILLIMETERS |      |      |
|-----|----------|------|------|-------------|------|------|
|     | MIN      | NOM  | MAX  | MIN         | NOM  | MAX  |
| A   | .053     | -    | .069 | 1.35        | -    | 1.75 |
| A1  | .004     | -    | .010 | 0.10        | -    | 0.25 |
| A2  | .049     | -    | .065 | 1.25        | -    | 1.65 |
| b   | .012     | -    | .020 | 0.31        | -    | 0.51 |
| c   | .007     | -    | .010 | 0.17        | -    | 0.25 |
| D   | .189     | .193 | .197 | 4.80        | 4.90 | 5.00 |
| E1  | .150     | .154 | .157 | 3.80        | 3.90 | 4.00 |
| E   | .236 BSC |      |      | 6.00 BSC    |      |      |
| e   | .050 BSC |      |      | 1.27 BSC    |      |      |
| h   | .010     | -    | .020 | 0.25        | -    | 0.50 |
| L   | .016     | .028 | .041 | 0.40        | 0.72 | 1.04 |
| L1  | (.041)   |      |      | (1.04)      |      |      |
| N   | 8        |      |      | 8           |      |      |
| θ1  | 0°       | -    | 8°   | 0°          | -    | 8°   |
| aaa | .004     |      |      | 0.10        |      |      |
| bbb | .010     |      |      | 0.25        |      |      |
| ccc | .008     |      |      | 0.20        |      |      |

#### NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. DATUMS **-A-** AND **-B-** TO BE DETERMINED AT DATUM PLANE **-H-**
3. DIMENSIONS "E1" AND "D" DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
4. REFERENCE JEDEC STD MS-012, VARIATION AA.

### Land Pattern - S0-8



| DIMENSIONS |        |             |
|------------|--------|-------------|
| DIM        | INCHES | MILLIMETERS |
| C          | (.205) | (5.20)      |
| G          | .118   | 3.00        |
| P          | .050   | 1.27        |
| X          | .024   | 0.60        |
| Y          | .087   | 2.20        |
| Z          | .291   | 7.40        |

#### NOTES:

1. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.
2. REFERENCE IPC-SM-782A, RLP NO. 300A.

**PROTECTION PRODUCTS****Ordering Information**

| Part Number    | Lead Finish | Qty per Reel | Reel Size |
|----------------|-------------|--------------|-----------|
| SMDA05CN-5.TB  | SnPb        | 500          | 7 Inch    |
| SMDA15CN-5.TB  | SnPb        | 500          | 7 Inch    |
| SMDA05CN-5.TBT | Pb Free     | 500          | 7 Inch    |
| SMDA15CN-5.TBT | Pb Free     | 500          | 7 Inch    |
| SMDA05CN-5     | SnPb        | 95/Tube      | N/A       |
| SMDA15CN-5     | SnPb        | 95/Tube      | N/A       |
| SMDA05CN-5.T   | Pb Free     | 95/Tube      | N/A       |
| SMDA15CN-5.T   | Pb Free     | 95/Tube      | N/A       |

Note: Lead-free devices are RoHS/WEEE Compliant

**Contact Information**

Semtech Corporation  
Protection Products Division  
200 Flynn Road, Camarillo, CA 93012  
Phone: (805)498-2111 FAX (805)498-3804