

F95 Series



Standard Conformal Coated Chip

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage							
μF	Code	4V (0G)	6.3V (0J)	10V (1A)	16V (1C)	20V (1D)	25V (1E)	35V (1V)	50V (1H)
1.0	105						R	P/S	P ^(M) *
1.5	155								
2.2	225					P	P/R	A	
3.3	335								
4.7	475				P/R	A/S	A/P/Q/S	B	
6.8	685								
10	106			P/R ^(M)	A/P/Q/S	A/B/S	A/B		
15	156			P	A/S				
22	226		R ^(M)	A/P ^(M) /Q/S	A/B/Q/S/T	B			
33	336		P ^(M)	A/P ^(M) /Q/S	B/T	B			
47	476		P ^(M)	A/B/P ^(M) /S/T	B				
68	686		P ^(M)	B					
100	107	A/P ^(M) /S	A/B/P ^(M) /Q/S/T	A/B/T					
150	157	B/P ^(M)	B						
220	227	A/B/Q/S/T	B						
330	337	A/B/T	B						
470	477	B	B						
680	687								

Released ratings ^(M tolerance only)

*Rated temperature 60°C only. Please contact AVX when you need detail spec.

Please contact to your local AVX sales office when these series are being designed in your application.

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	*2 DCL (μA)	DF @ 120Hz (%)	ESR @ 100kHz (Ω)	*1 ΔC/C (%)	MSL
4 Volt								
F950G107MAAAQ2	A	100	4	4.0	12	0.5	*	3
F950G107MPAAQ2	P	100	4	4.0	30	1.2	±15	3
F950G107MSAAQ2	S	100	4	4.0	14	0.8	*	3
F950G157MBAAQ2	B	150	4	6.0	14	0.4	*	3
F950G157MPAAQ2	P	150	4	12.0	31	1.1	±20	3
F950G227MAAAQ2	A	220	4	8.8	25	0.8	±15	3
F950G227MBAAQ2	B	220	4	8.8	16	0.4	*	3
F950G227MQAAQ2	Q	220	4	8.8	30	1.5	±20	3
F950G227MSAAQ2	S	220	4	8.8	30	0.8	±15	3
F950G227MTAAQ2	T	220	4	8.8	25	0.6	*	3
F950G337MAAAQ2	A	330	4	13.2	40	0.8	±20	3
F950G337MBAAQ2	B	330	4	13.2	30	0.6	±15	3
F950G337MTAAQ2	T	330	4	13.2	40	0.8	±20	3
F950G477MBAAQ2	B	470	4	18.8	40	0.4	±20	3
6.3 Volt								
F950J336MPAAQ2	P	33	6.3	2.1	14	1.1	*	3
F950J226MRAAQ2	R	22	6.3	1.4	20	2.0	±20	3
F950J476MPAAQ2	P	47	6.3	3.0	20	1.1	±15	3
F950J686MPAAQ2	P	68	6.3	4.3	25	1.2	±15	3
F950J107MAAAQ2	A	100	6.3	6.3	14	0.5	*	3
F950J107MBAAQ2	B	100	6.3	6.3	14	0.4	*	3
F950J107MPAAQ2	P	100	6.3	12.6	35	1.2	±20	3
F950J107MQAAQ2	Q	100	6.3	6.3	30	1.1	±20	3
F950J107MSAAQ2	S	100	6.3	6.3	20	0.9	±15	3
F950J107MTAAQ2	T	100	6.3	6.3	14	0.6	*	3
F950J157MBAAQ2	B	150	6.3	9.5	18	0.4	*	3
F950J227MBAAQ2	B	220	6.3	13.9	30	0.4	*	3
F950J337MBAAQ2	B	330	6.3	20.8	35	0.6	±20	3
F950J477MBAAQ2	B	470	6.3	59.2	40	0.5	±20	3
10 Volt								
F951A106MPAAQ2	P	10	10	1.0	8	3.0	*	3
F951A106MRAAQ2	R	10	10	1.0	18	3.0	±20	3
F951A156MPAAQ2	P	15	10	1.5	10	3.0	*	3
F951A226MAAAQ2	A	22	10	2.2	6	0.9	*	3
F951A226MPAAQ2	P	22	10	2.2	14	3.0	*	3
F951A226MQAAQ2	Q	22	10	2.2	10	2.0	*	3
F951A226MSAAQ2	S	22	10	2.2	10	1.1	*	3
F951A336MAAAQ2	A	33	10	3.3	10	0.8	*	3
F951A336MPAAQ2	P	33	10	3.3	20	3.0	±15	3
F951A336MQAAQ2	Q	33	10	3.3	18	3.0	±15	3
F951A336MSAAQ2	S	33	10	3.3	10	1.1	*	3
F951A476MAAAQ2	A	47	10	4.7	10	0.8	*	3
F951A476MBAAQ2	B	47	10	4.7	8	0.4	*	3
F951A476MPAAQ2	P	47	10	4.7	30	3.0	±20	3
F951A476MSAAQ2	S	47	10	4.7	14	1.1	±15	3

1: ΔC/C Marked “”

Item	All Case (%)
Damp Heat	±10
Temperature cycles	±5
Resistance soldering heat	±5
Surge	±5
Endurance	±10

*2: Leakage Current



After 1 minute's application of rated voltage, leakage current at 20°C.

AVX Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	*2 DCL (μA)	DF @ 120Hz (%)	ESR @ 100kHz (Ω)	*1 ΔC/C (%)	MSL
16 Volt								
F951A476MTAAQ2	T	47	10	4.7	12	0.8	*	3
F951A686MBAAQ2	B	68	10	6.8	12	0.4	*	3
F951A107MAAAQ2	A	100	10	10.0	35	1.0	±15	3
F951A107MBAAQ2	B	100	10	10.0	14	0.4	*	3
F951A107MTAAQ2	T	100	10	10.0	20	0.6	±15	3
16 Volt								
F951C475MPAAQ2	P	4.7	16	0.8	10	4.0	*	3
F951C475MRAAQ2	R	4.7	16	0.8	12	6.0	±20	3
F951C106MAAAQ2	A	10	16	1.6	6	1.4	*	3
F951C106MPAAQ2	P	10	16	1.6	10	4.0	*	3
F951C106MQAAQ2	Q	10	16	1.6	8	3.0	*	3
F951C106MSAAQ2	S	10	16	1.6	8	2.0	*	3
F951C156MAAAQ2	A	15	16	2.4	8	1.4	*	3
F951C156MSAAQ2	S	15	16	2.4	8	2.0	*	3
F951C226MAAAQ2	A	22	16	3.5	8	1.4	*	3
F951C226MBAAQ2	B	22	16	3.5	6	0.5	*	3
F951C226MQAAQ2	Q	22	16	3.5	12	3.0	*	3
F951C226MSAAQ2	S	22	16	3.5	10	2.0	±15	3
F951C226MTAAQ2	T	22	16	3.5	8	1.4	*	3
F951C336MBAAQ2	B	33	16	5.3	8	0.5	*	3
F951C336MTAAQ2	T	33	16	5.3	11	1.5	±10	3
F951C476MBAAQ2	B	47	16	7.5	10	0.6	*	3
20 Volt								
F951D225MPAAQ2	P	2.2	20	0.5	6	6.0	*	3
F951D475MAAAQ2	A	4.7	20	0.9	6	1.5	*	3
F951D475MSAAQ2	S	4.7	20	0.9	8	4.0	*	3
F951D106MAAAQ2	A	10	20	2.0	8	1.5	*	3
F951D106MBAAQ2	B	10	20	2.0	6	0.8	*	3
F951D106MSAAQ2	S	10	20	2.0	10	4.0	±10	3
F951D226MBAAQ2	B	22	20	4.4	8	0.8	*	3
F951D336MBAAQ2	B	33	20	6.6	15	1.0	*	3
25 Volt								
F951E105MRAAQ2	R	1	25	0.5	10	10.0	±10	3
F951E225MPAAQ2	P	2.2	25	0.6	8	6.0	±15	3
F951E225MRAAQ2	R	2.2	25	0.6	15	15.0	±20	3
F951E475MAAAQ2	A	4.7	25	1.2	8	2.0	*	3
F951E475MPAAQ2	P	4.7	25	1.2	10	8.0	±15	3
F951E475MQAAQ2	Q	4.7	25	1.2	10	4.0	±15	3
F951E475MSAAQ2	S	4.7	25	1.2	8	4.0	*	3
F951E106MAAAQ2	A	10	25	2.5	12	2.0	±15	3
F951E106MBAAQ2	B	10	25	2.5	6	0.9	*	3
35 Volt								
F951V105MPAAQ2	P	1	35	0.5	8	10.0	±10	3
F951V105MSAAQ2	S	1	35	0.5	6	8.0	*	3
F951V225MAAAQ2	A	2.2	35	0.8	6	4.4	*	3
F951V475MBAAQ2	B	4.7	35	1.7	6	1.6	*	3
50 Volt								
F951H105MPALZTQ2	P	1	50	1.0	8	7.0	±20	3

* In case of capacitance tolerance ± 10% type, “K” will be put at 9th digit of type numbering system
Moisture Sensitivity Level (MSL) is defined according to J-STD-020.


QUALIFICATION TABLE

TEST	F95 series (Temperature range -55°C to +125°C)	
	Condition	
Damp Heat (Steady State)	At 40°C, 90 to 95% R.H., 500 hours (No voltage applied) Capacitance Change Refer to page 157 (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Temperature Cycles	At -55°C / +125°C, 30 minutes each, 5 cycles Capacitance Change Refer to page 157 (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Resistance to Soldering Heat	10 seconds reflow at 260°C, 10 seconds immersion at 260°C. Capacitance Change Refer to page 157 (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Surge	After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors shall meet the characteristic requirements in the table above. Capacitance Change Refer to page 157 (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Endurance	After 2000 hours' application of rated voltage at 85°C, capacitors shall meet the characteristic requirements in the table above. Capacitance Change Refer to page 157 (*1) Dissipation Factor Initial specified value or less Leakage Current Initial specified value or less	
Shear Test	After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.	
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of capacitor, the pressure strength is applied with a specified jig at the center of substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.	




Standard Conformal Coated Chip

AVX SOLID ELECTROLYTIC CAPACITOR ROADMAP

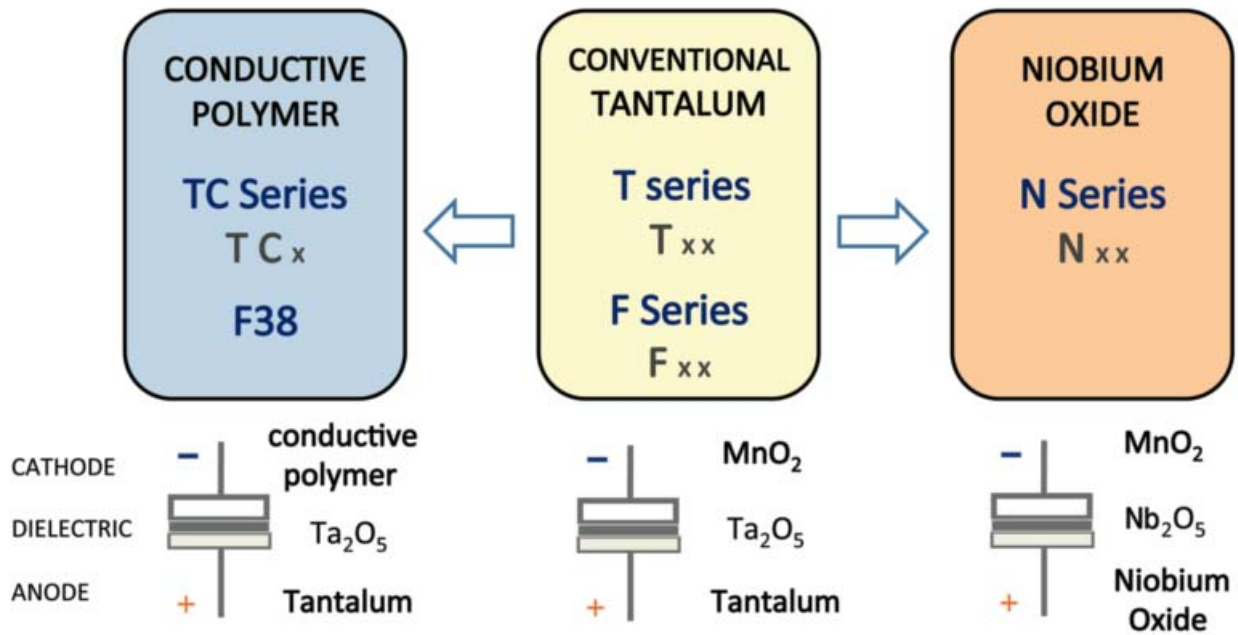

Five Capacitor Construction Styles

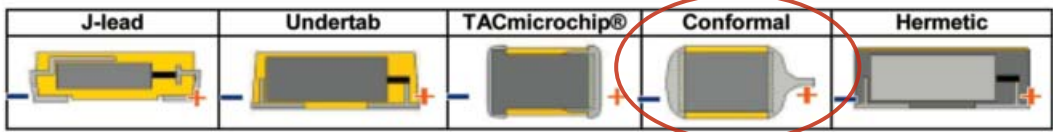

SERIES LINE UP: CONFORMAL Ta MnO₂

