


PART NUMBER		SML-LX23SYC-TR		REV.	G
DATE		E.C.N. NUMBER AND REVISION COMMENTS		REV.	
02.05.99		E.C.N. #10BRDR, ADDED REFLOW PROFILE.		A	
08.09.99		E.C.N. #10543.		B	
07.18.00		E.C.N. #10644. & REDRAWN IN 3D.		C	
03.14.03		E.C.N. #10967.		D	
02.08.05		E.C.N. #11148.		E	
12.15.09		E.C.N. #11603.		F	
03.28.11		E.C.N. #10BRDR & REDRAWN.		G	

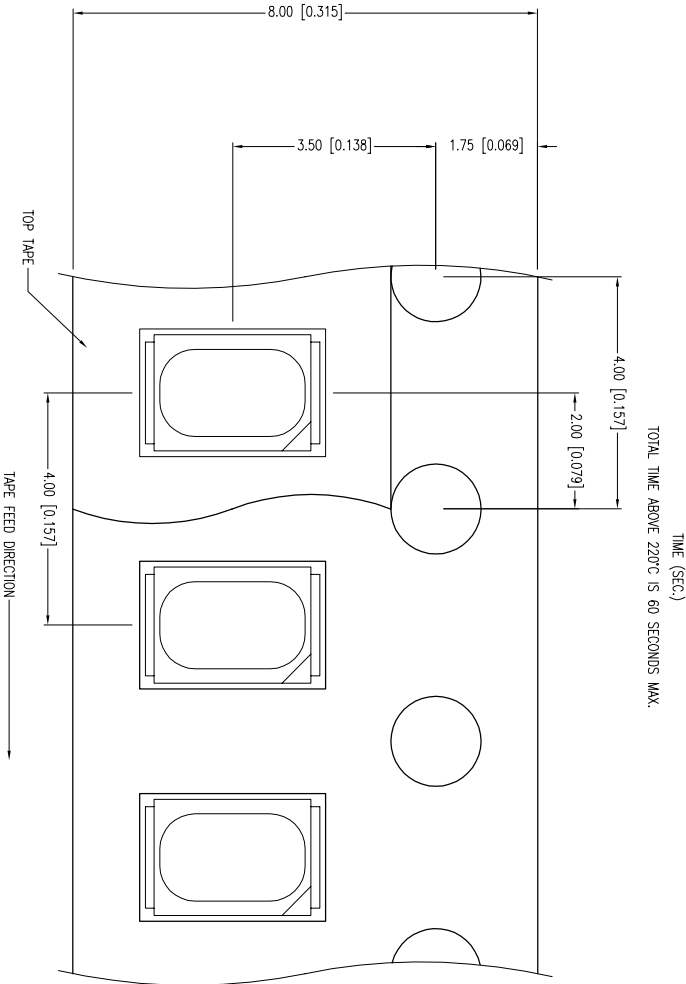

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= -0.00, DECIMAL PRECISION MAX.= +0.00, DECIMAL PRECISION

LUMIMEX

Creating LED and LCD Solutions Together™

290 E. HELEN ROAD

PALATINE, IL 60067-6976

PHONE: +1.847.359.2790

FAX: +1.847.359.6538

WEB: WWW.LUMIMEX.COM

2mm x 3mm SURFACE MOUNT WITH REFLECTOR, 590nm SUPER YELLOW LED, WATER CLEAR LENS.

***THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.**

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	03.28.11	DRAWN BY:	AB
PAGE:	2 OF 2	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		

UNCONTROLLED DOCUMENT

Downloaded from Arrow.com