

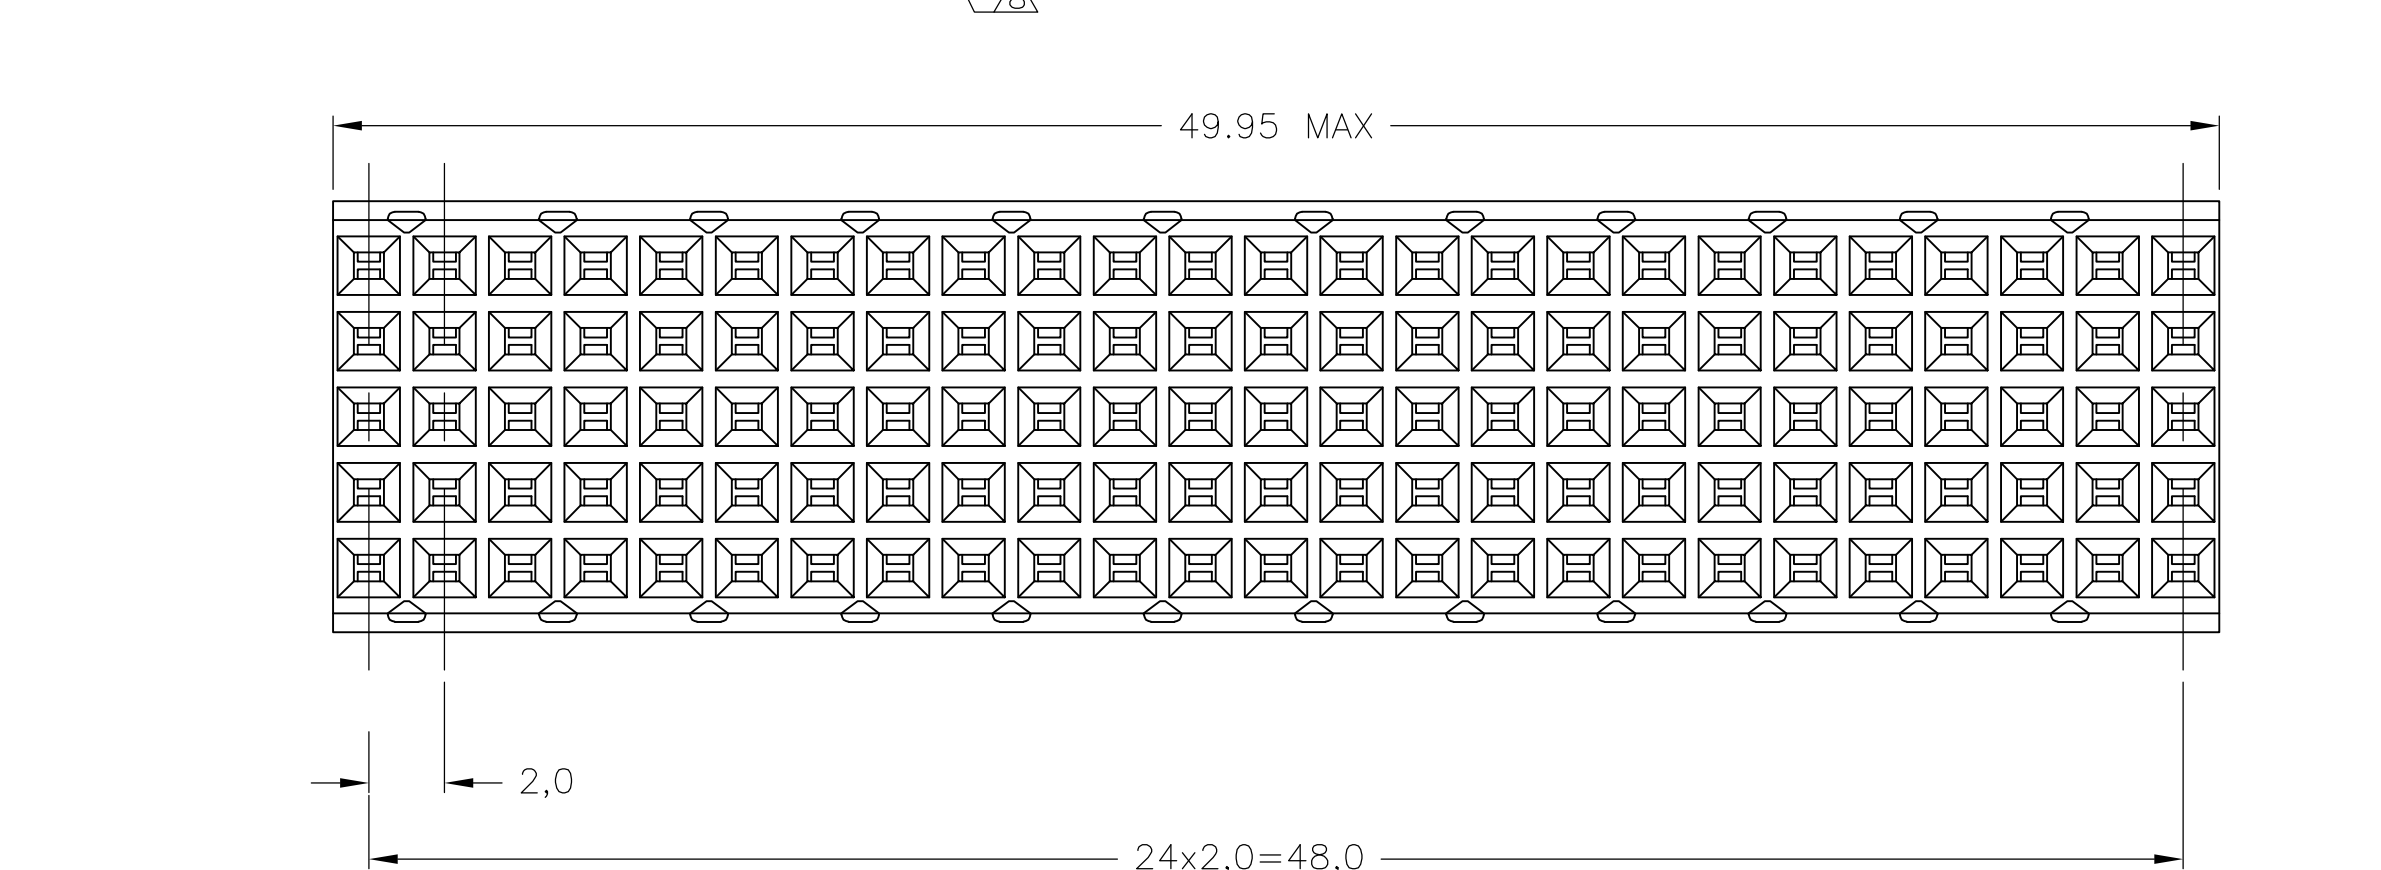
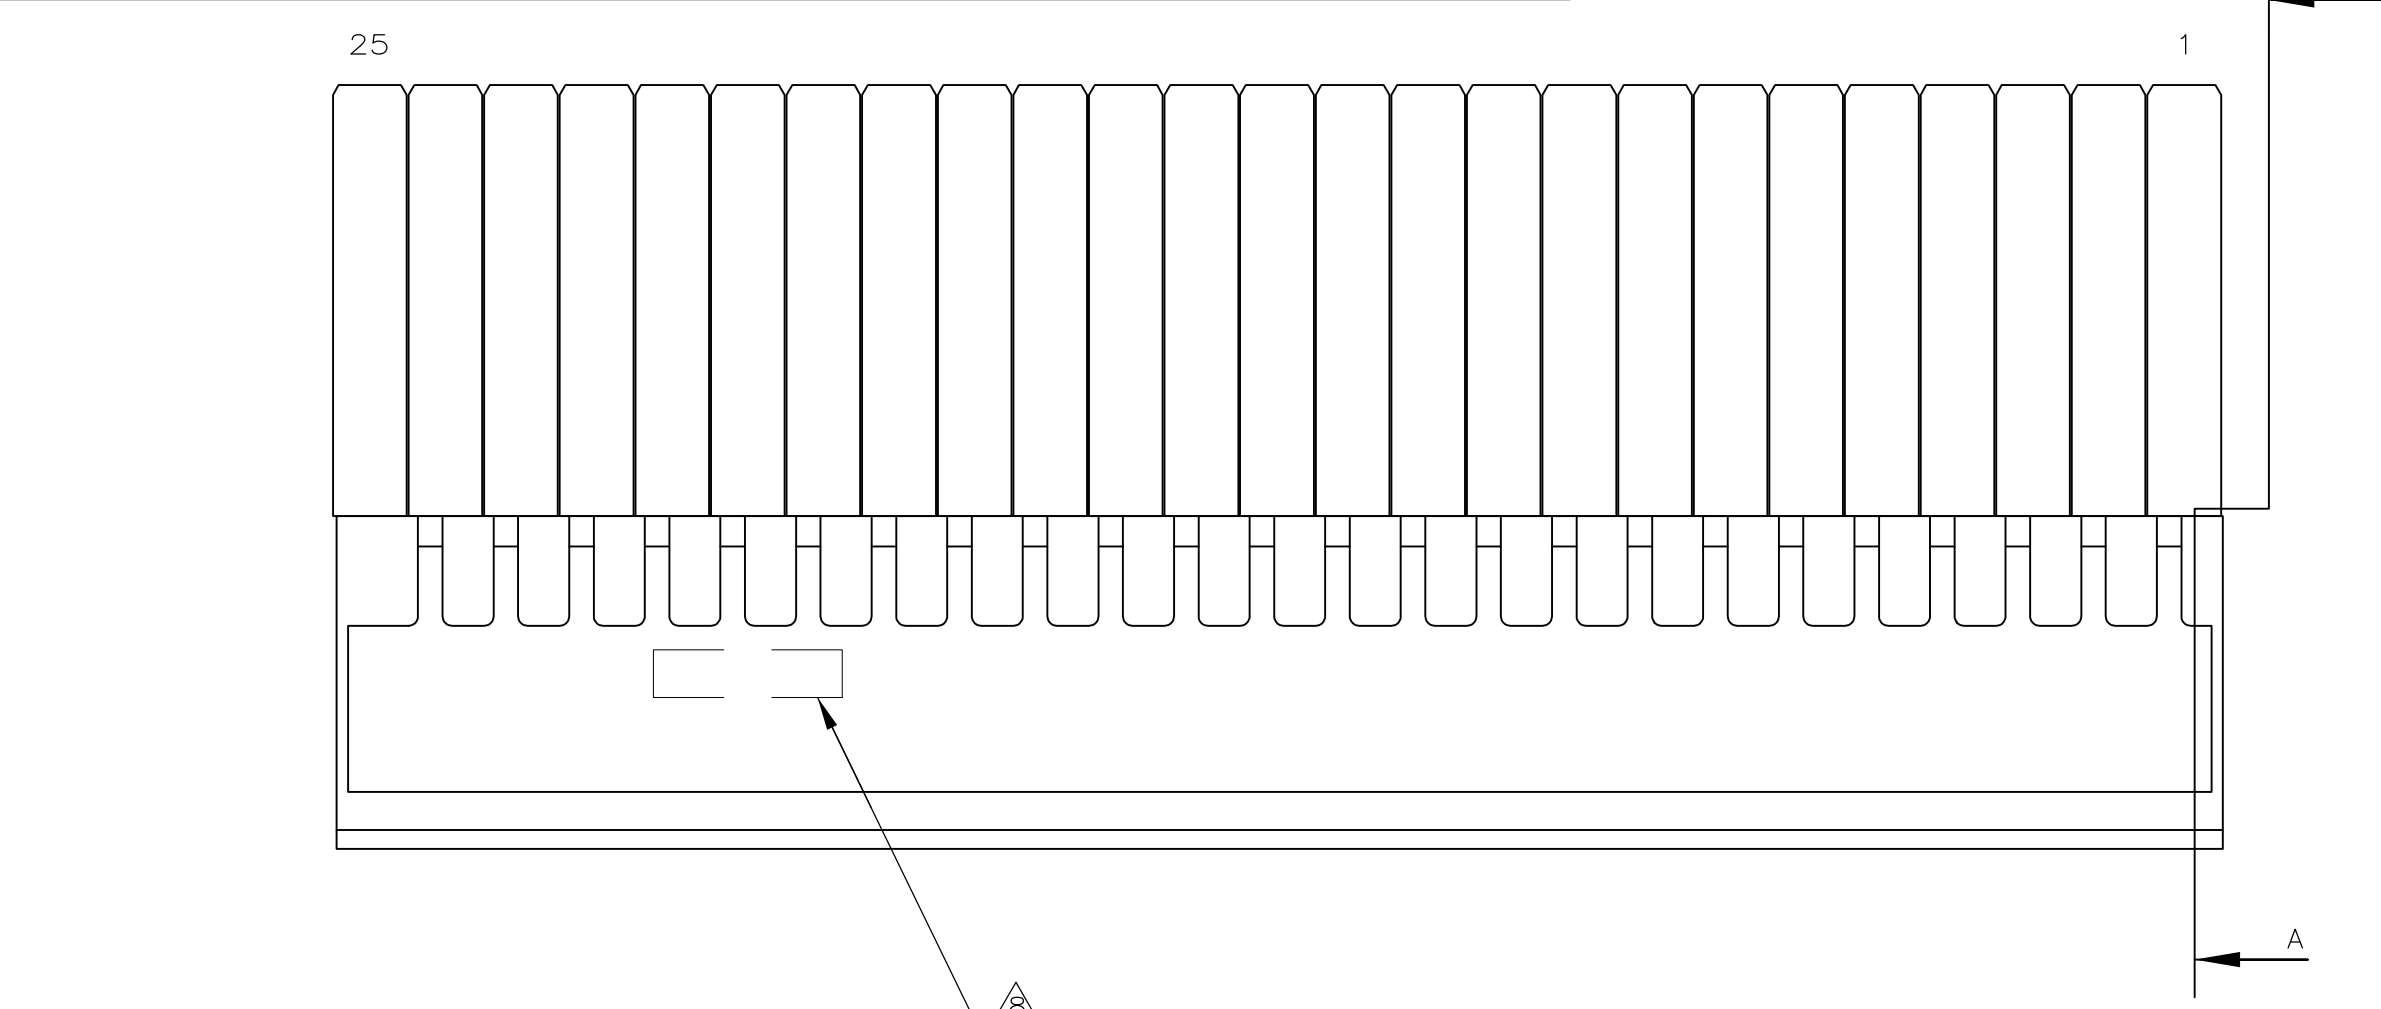
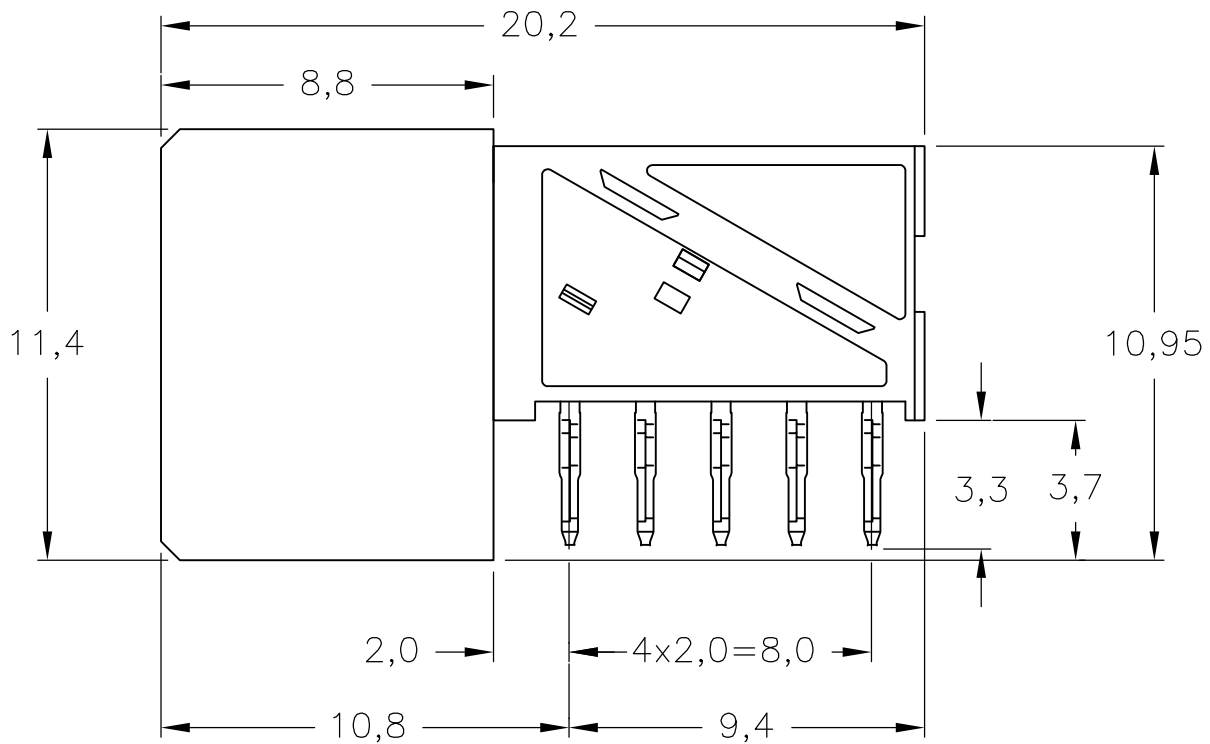
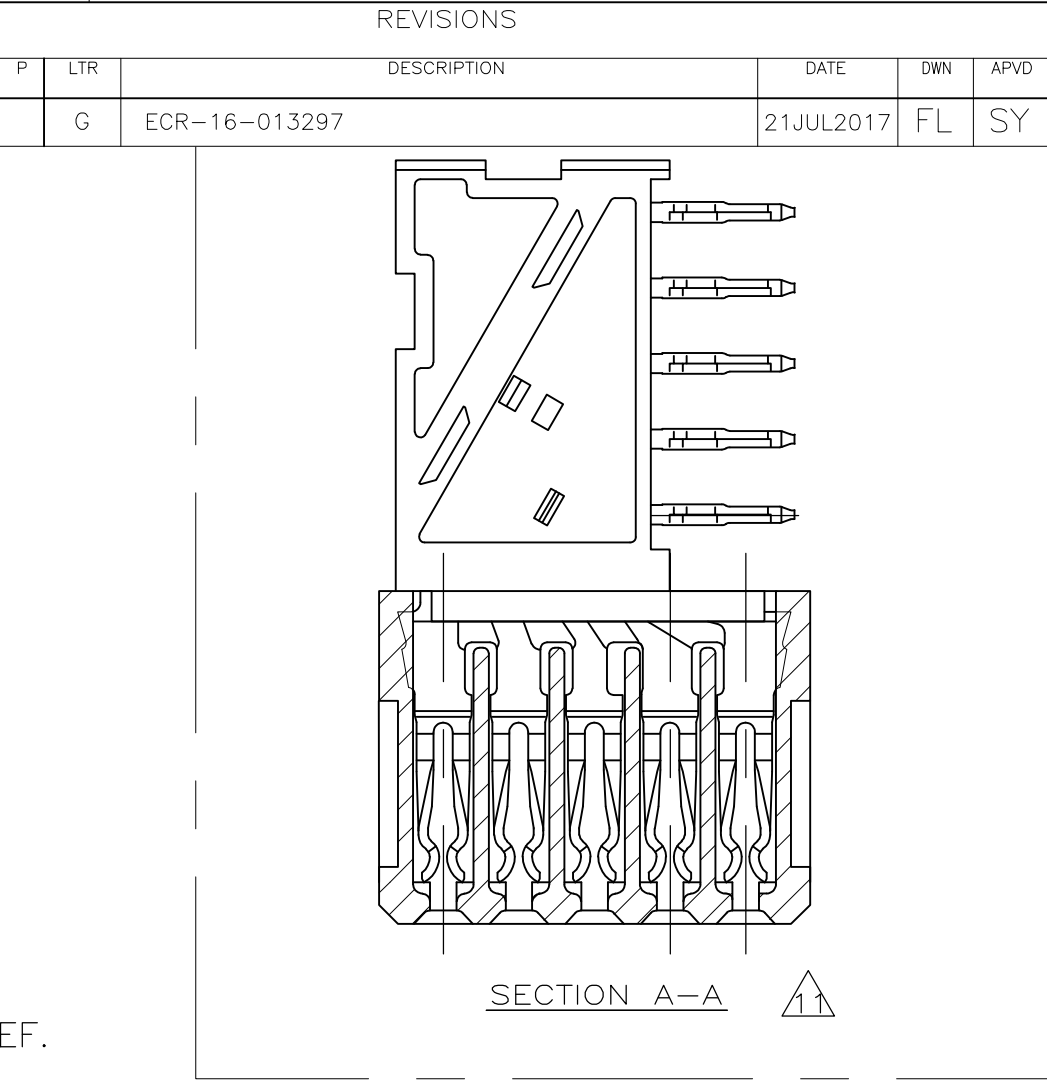


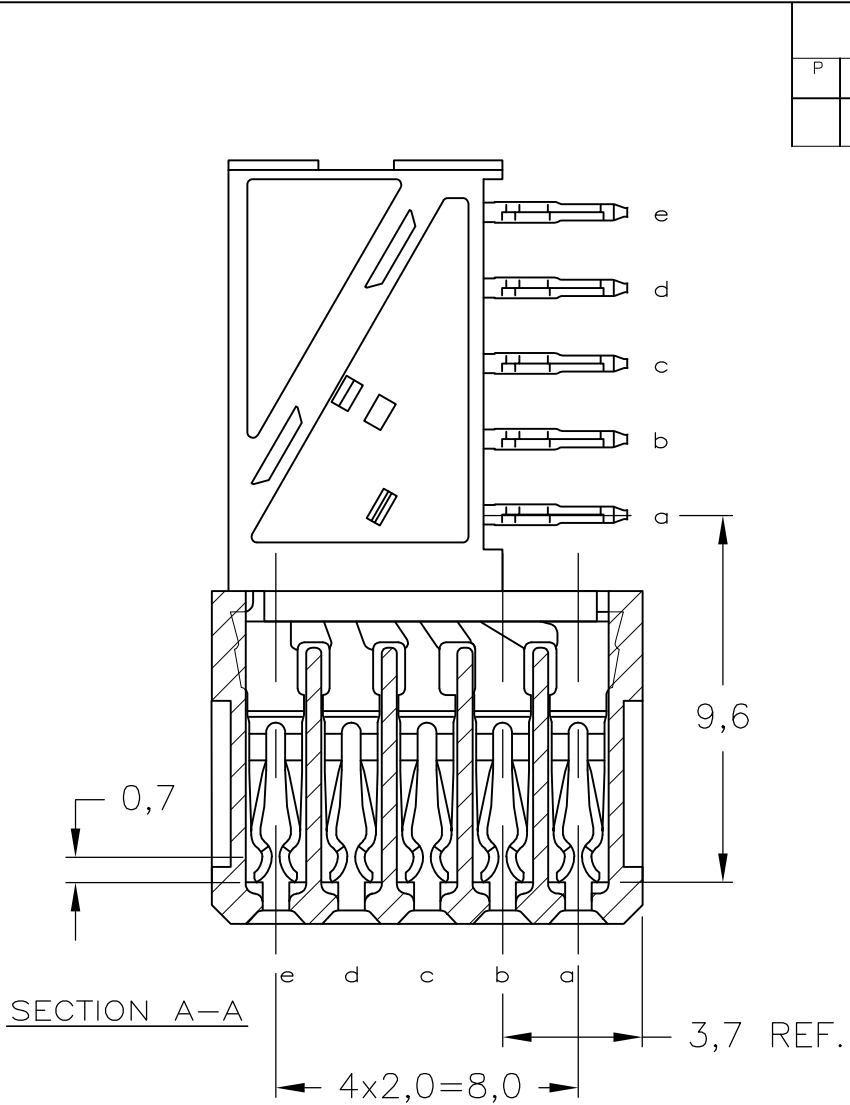

NOTES:

- MATERIAL CONTACT; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
UL-RATING 94V0.
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
- PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 125 HOLES
- FITS WITH INTEGRATED GROUND RETURN UPPERSHIELD, BASIC P.N. 5338109
AND INTEGRATED GROUND RETURN LOWERSHIELD, BASIC P.N. 5338110
- CONNECTOR ASSEMBLED WITH REDESIGNED CONTACTS.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 0.76µm MIN. GOLD PLATING AT MATING SURFACES.

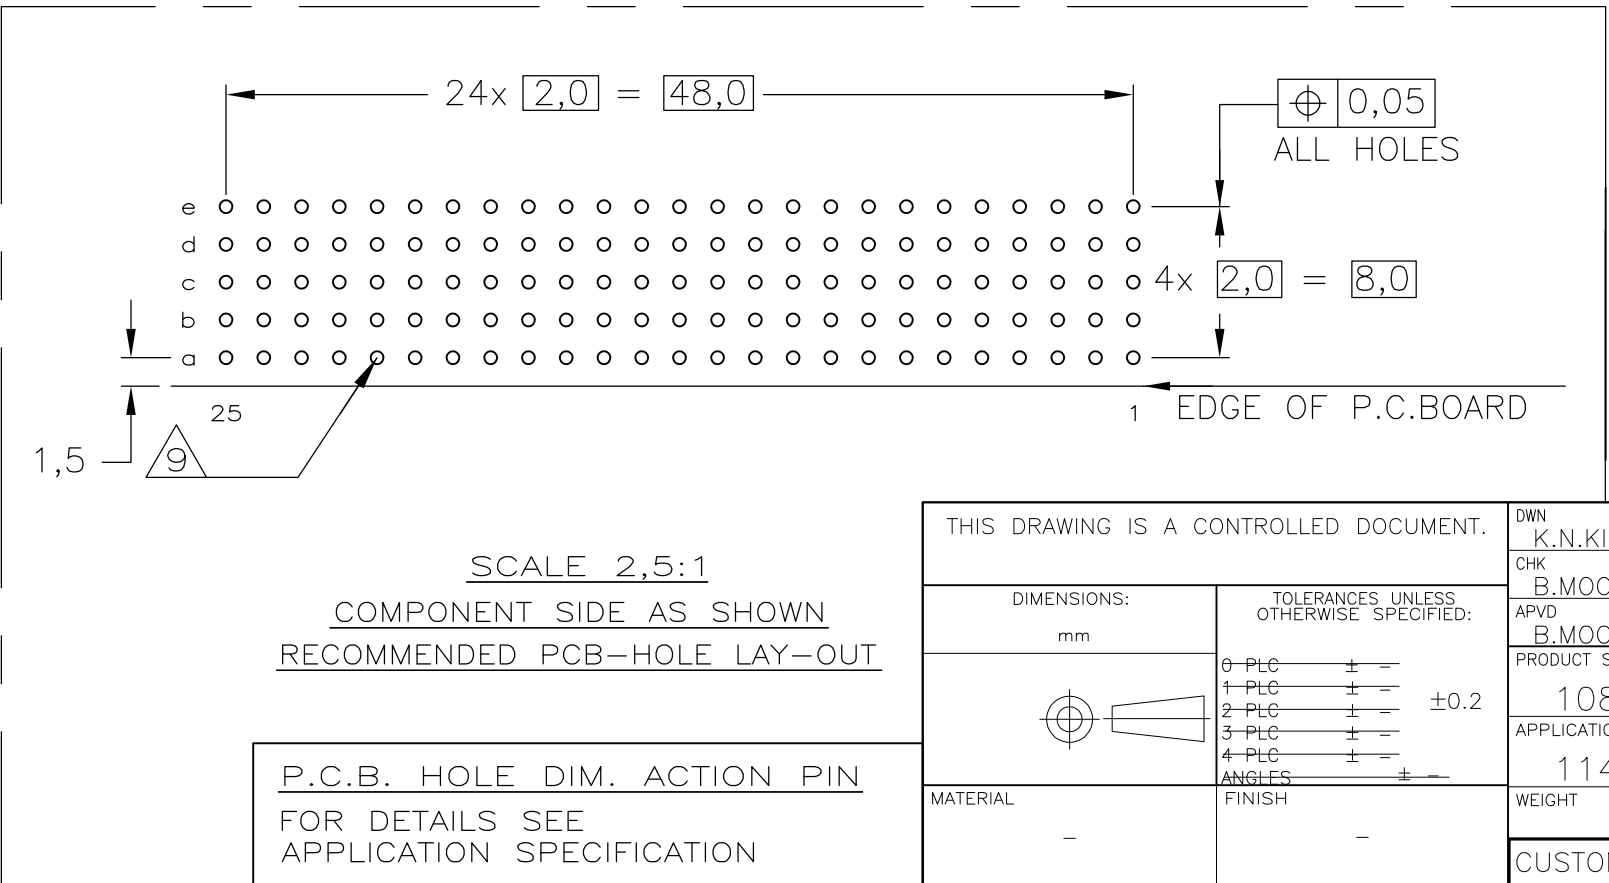

			3-5100145-0	
OBSOLETE			1-5100145-9	
			5100145-9	
OBSOLETE			5100145-4	
			5100145-1	
	FINISH	MATERIAL	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.N.KIRAN	05AUG2004	TE Connectivity			
		CHK	B.MOOLJ	22SEP2004				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	B.MOOLJ	NAME		
mm				PRODUCT SPEC	108-19082	Z-PACK 2mm HM TYPE B		
				APPLICATION SPEC	114-19029	125 POS. FEMALE CONNECTOR		
				WEIGHT	0.0000	SIZE	CAGE CODE	DRAWING NO
				CUSTOMER DRAWING		A2	00779	C=5100145
				SCALE	4:1	SHEET	1 of 1	REV
								G