

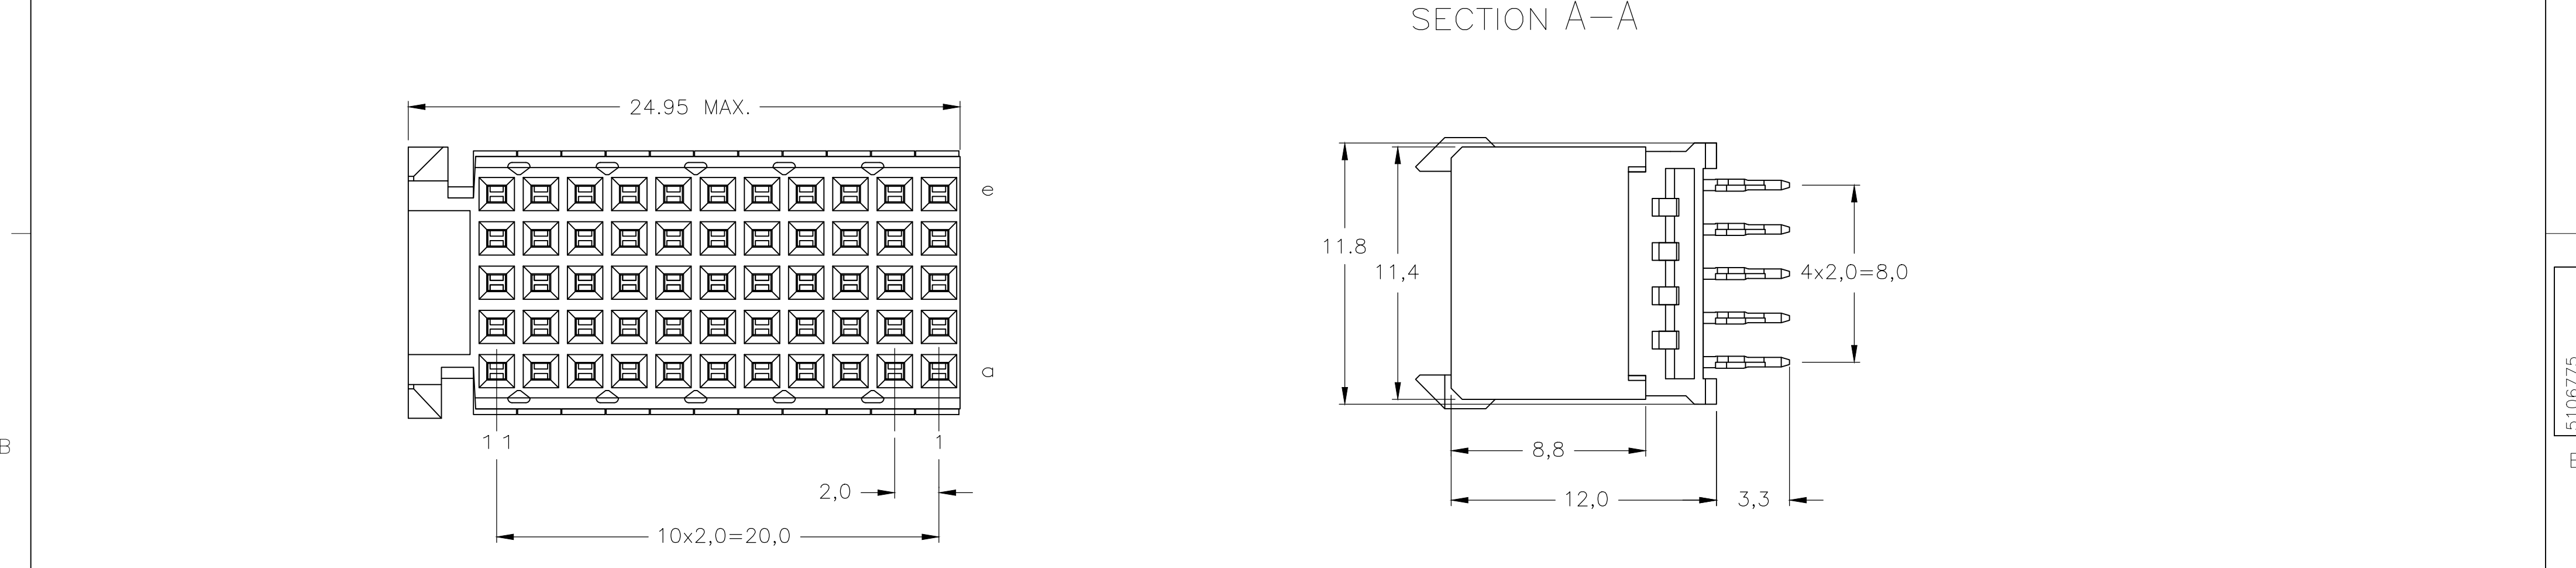


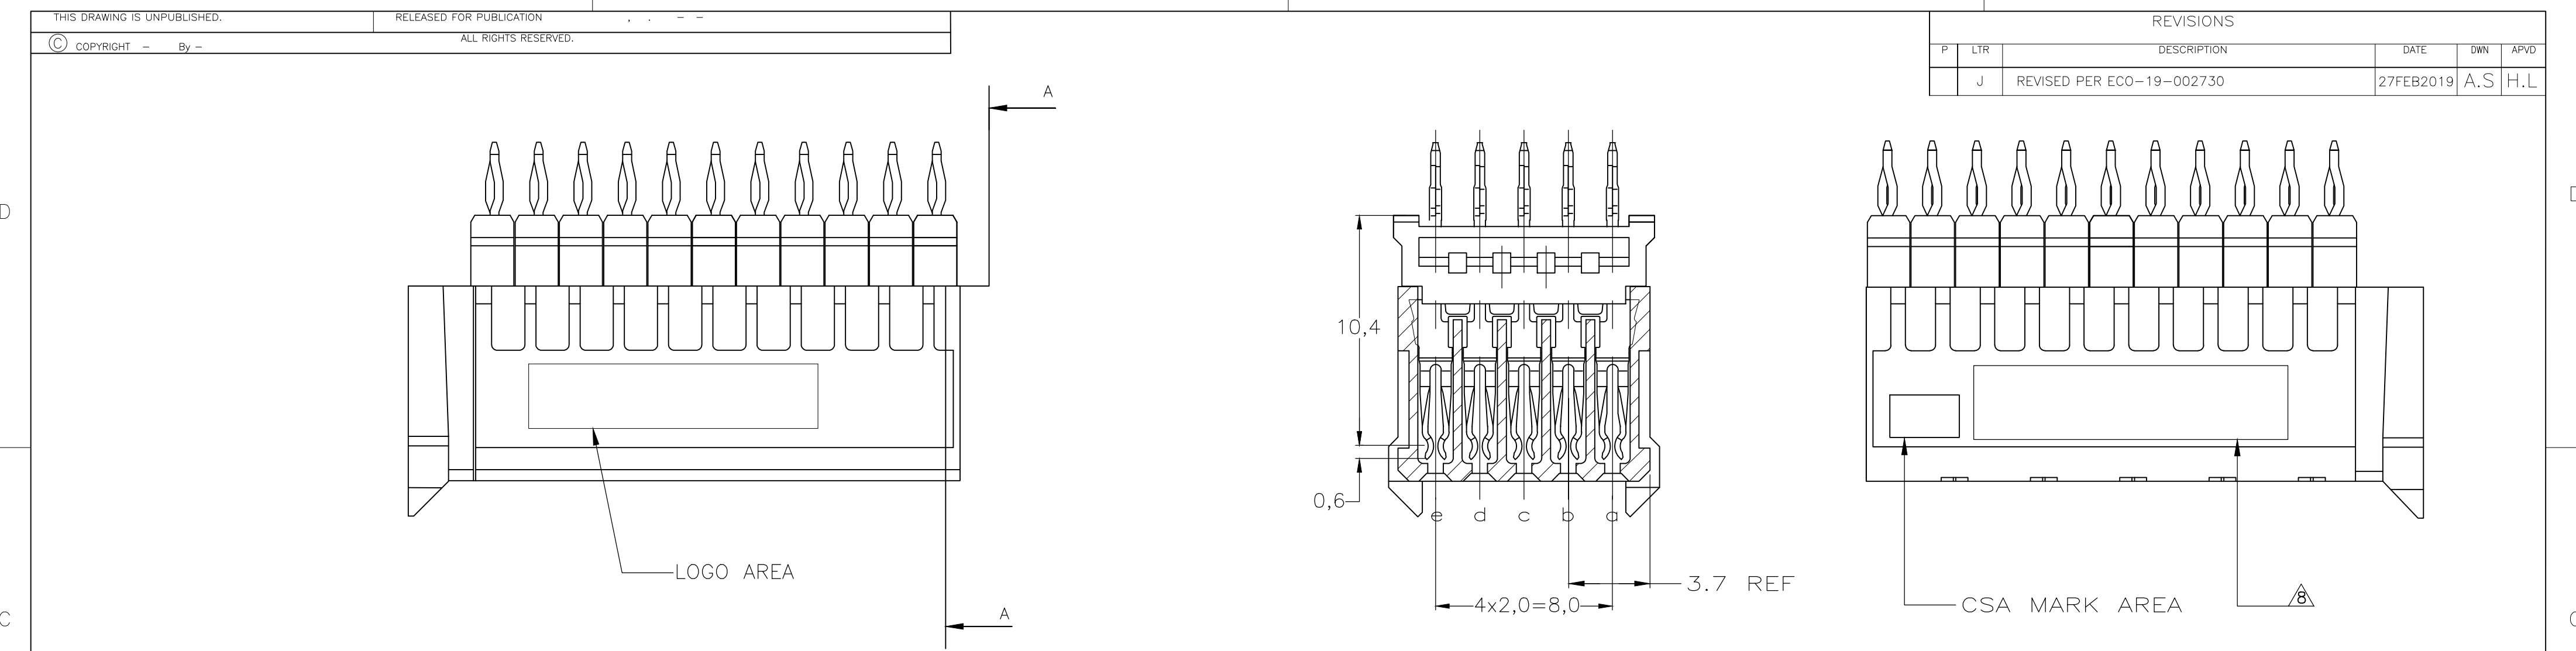

NOTES:

- △ MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- △ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- △ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- △ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (55 HOLES).
- △ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
- △ 0.76µm MIN. GOLD PLATING AT MATING SURFACE

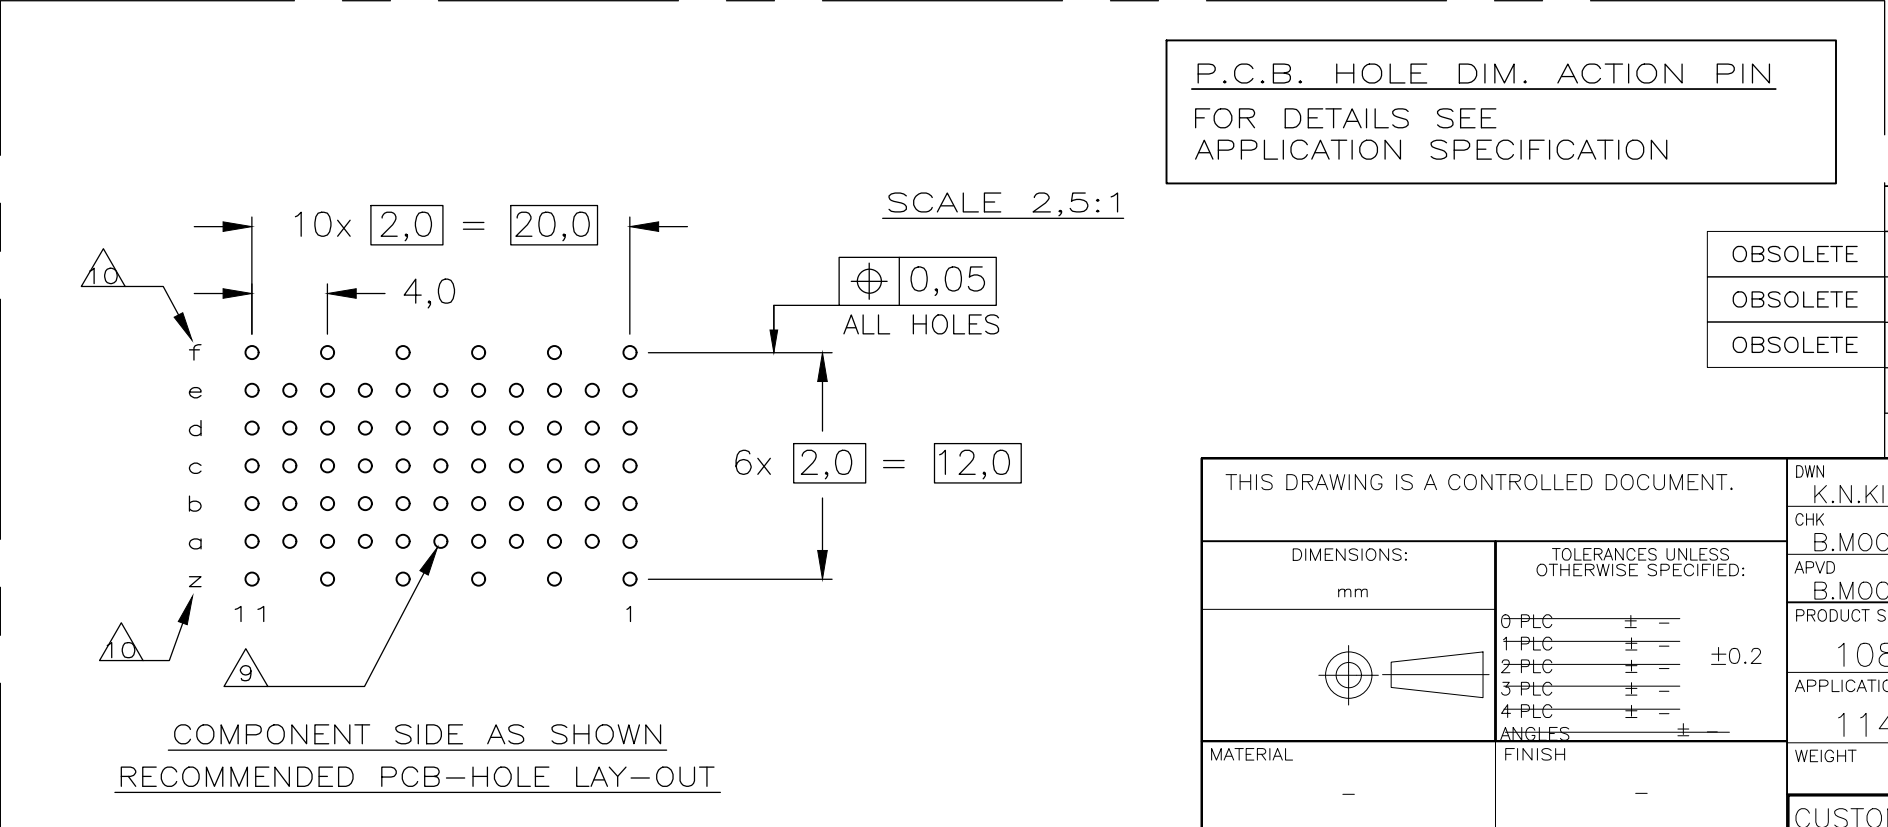

		△△△	△	3-5106775-0
OBSOLETE		△△△	△	1-5106775-9
OBSOLETE		△△△	△	5106775-9
OBSOLETE		△△	△	5106775-4
		△△	△	5106775-1
		FINISH	MATERIAL	PARTNUMBER

NT.		DWN K.N.KIRAN 13AUG2004	TE Connectivity			
CHK B.MOOIJ 27OCT2004						
APVD B.MOOIJ 27OCT2004						
PRODUCT SPEC						
SS IED:		NAME				
±0.2		Z-PACK 2mm HM TYPE C 55 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY				
=		APPLICATION SPEC				
		RESTRICTED TO				
		DRAWING NO				
		CAGE CODE				
		SIZE				
		WEIGHT				
		CUSTOMER DRAWING				
		SCALE				
		SHEET				
		REV				