


32.768kHz SMD Low ESR Crystal

ABS07-LR



RoHS/RoHS II Compliant



3.2 x 1.5 x 0.9 mm

PART IDENTIFICATION (LEFT BLANK IF STANDARD)

ABS07-LR-32.768 kHz - 6 - -

Freq. Tolerance

Blank: ± 20 ppm




1: ± 10 ppm

Packaging


Blank: Bulk

T: Tape & Reel
(3000pcs/reel)

OUTLINE DIMENSIONS:

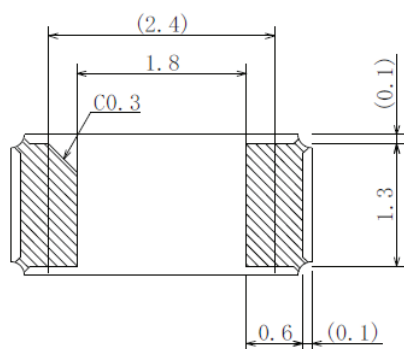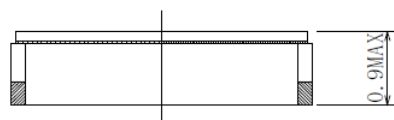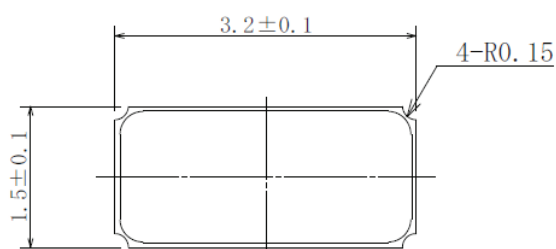

Recommended Land Pattern

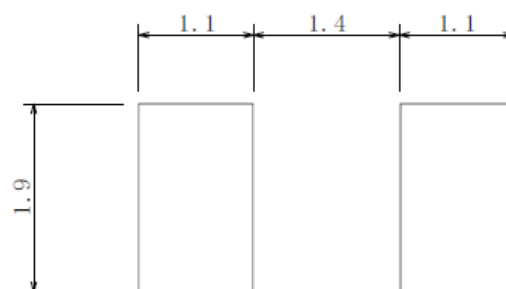


Dimensions: mm

32.768kHz SMD Low ESR Crystal

ABS07-LR




RoHS/RoHS II Compliant




3.2 x 1.5 x 0.9 mm

REFLOW PROFILE

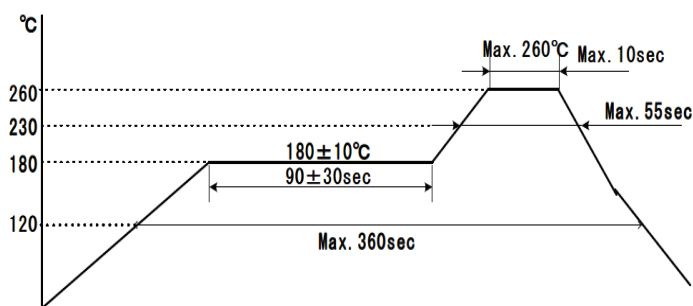

TAPE & REEL:

T=Tape and reel (3,000pcs/reel)

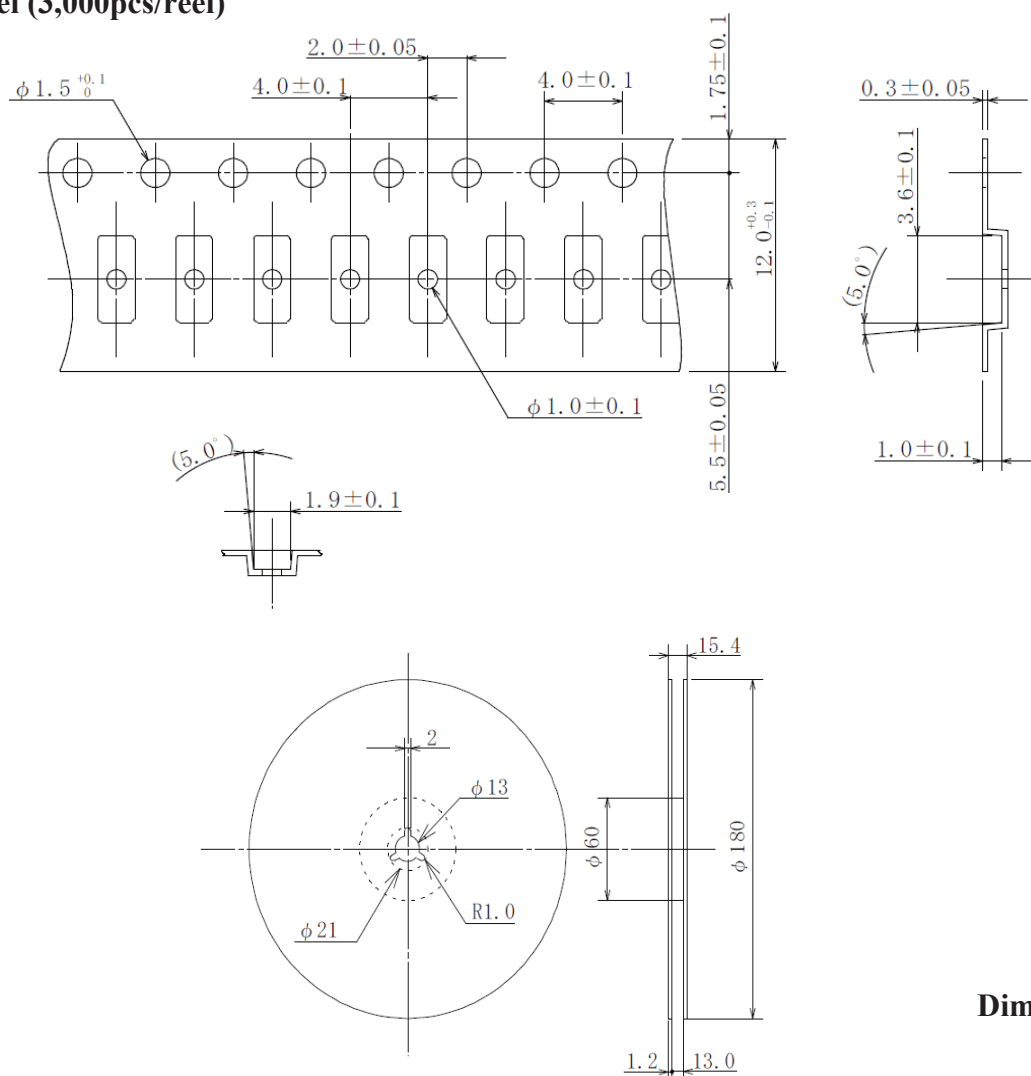

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 03.27.15**

Ph. 949.546.8000 | Fax. 949.546.8001

Visit www.abracon.com for Terms and Conditions of Sale