


Network Media Processors

With three generations of evolution, our processors have evolved to deliver excellent performance and I/O, featuring a system integration to provide cost-effective, yet powerful feature-rich connectivity for audio-centric products. Based around ARM®9 processors, our highly-optimized buses and I/O structures manage high-quality, high bit-rate, high-bandwidth digital audio with low noise and jitter. We've integrated primary interfaces like Ethernet, USB 2.0, S/PDIF, LCD controller, CCIR656 (for TV UIs) and even Wi-Fi MAC®/baseband so you can develop low-cost, yet feature-rich products. Our latest generation processors feature a "triple core" architecture that provides over 1000 MIPS of combined processing power and separate proprietary cores for security and audio processing features/capabilities.

Network Media Processors Summary

Product	Processors	Integrated Wi-Fi	Ethernet	LCD	CCIR656	USB 2.0	S/PDIF	SD/SDIO
DM870A	Triple Core, 3rd Gen <ul style="list-style-type: none"> ARM9-240MHz Security core - 160MHz Audio engine - 160MHz 	✓	✓	✓	✓	✓	✓	✓
DM860A	Triple Core, 3rd Gen <ul style="list-style-type: none"> ARM9-240MHz Security core - 160MHz Audio engine - 160MHz 		✓	✓	✓	✓	✓	✓

DM870A Processor Functional/Application Overview

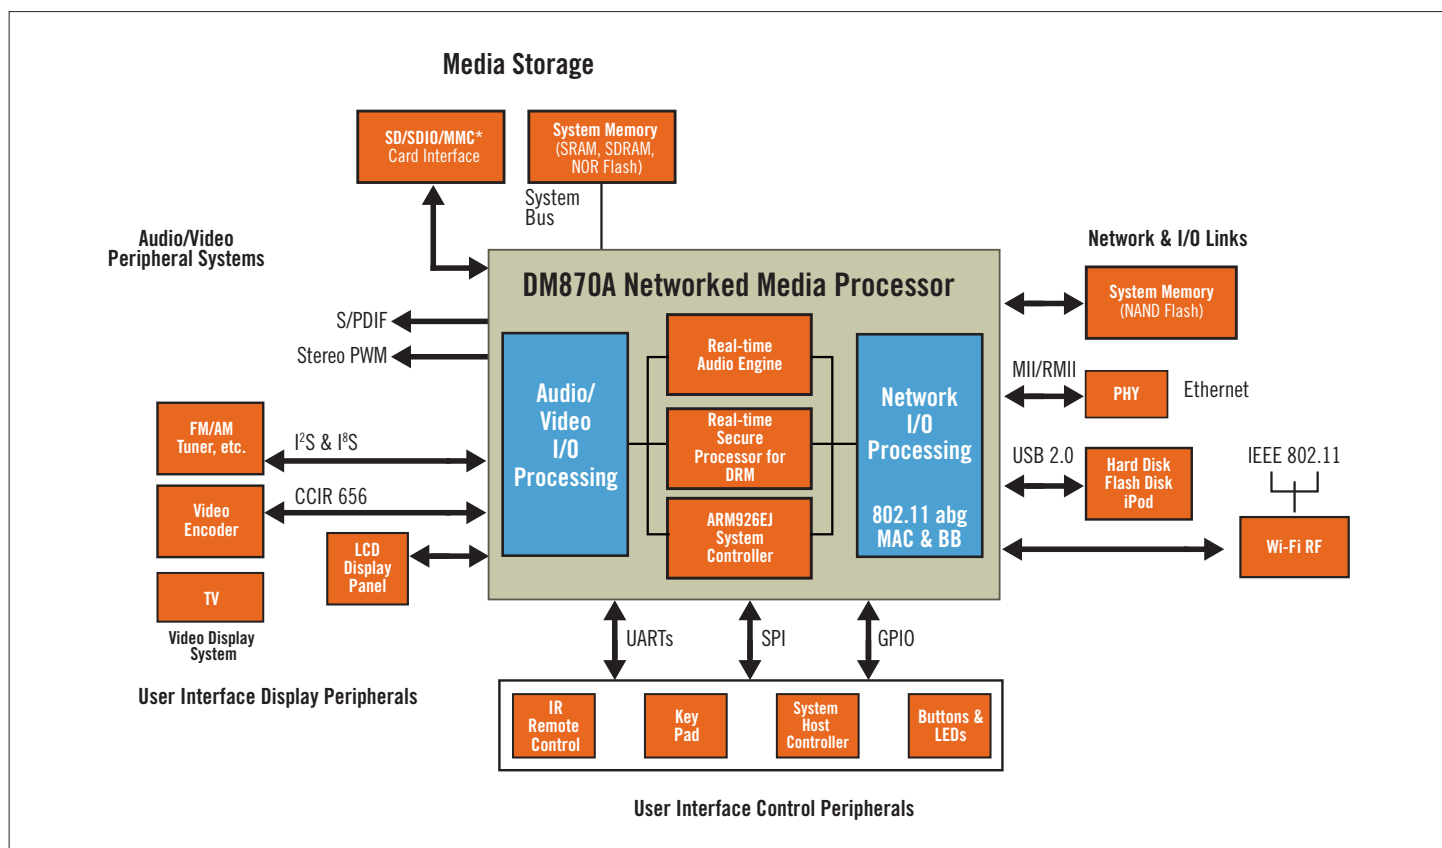


Network Media Modules

The JukeBlox 3.0 platform features an entire DMP (Digital Media Player) system on a miniature PCB. Featured below is our 3rd generation network media module, the CX870 series - offering full Wi-Fi pre-certification, FCC compliance and cost-effective memory/feature options in an aggressively-sized, cost-reduced solution. Our modules provide a cost-effective approach to bringing all the capabilities of the JukeBlox platform to your system without the complexities and costs of RF design and full compliance certifications. Plus, with our matrix of feature/population options, you can leverage one product design to service an entire product lineup. Leverage our design expertise as well as our aggregated volume to get high-value connectivity with low risk and low cost.

Primary CX Series Module Features

- Compact 81.3mm x 40.6mm (3.2" x 1.6")
- Supports full features for both aDMP and eDMP use
- DM870A/DM860A media processor versions
- Onboard Ethernet and integrated Wi-Fi options
- Includes SDRAM and Flash® memory systems
- Wi-Fi includes low-cost, on-board PCB antenna option
- Connects with standard header connectors
- Designed with SMSC quality and reliability validation
- Wi-Fi pre-certified, FCC-compliant, RoHS-compliant

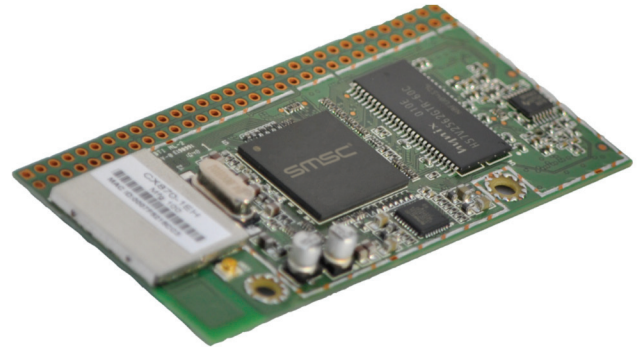


JukeBlox 3.0 Software and SDK

The JukeBlox platform is a comprehensive SDK based Digital Media Player (DMP) software/middleware development platform. It provides low level interfaces and a fast real-time ThreadX-based OS up through an extensive application layer. The platform is architected for digital rights management using a secure co-processor, offering a secure platform that supports current and future authentication and encryption schemes. The JukeBlox platform is compliant with industry standards published by the Digital Living Network Alliance Home (DLNA) and UPnP Forum. Using UPnP automatic discovery mechanisms, it bridges the content stored on the internet, PC or an alternative server device and provides the user interface for browsing entertainment content and metadata available on the network. Based on sophisticated radio station database management, an automatically updated list of 10,000+ stations is available. Automatic network management provides easy setup functions on a Wi-Fi network as well as support for Wi-Fi Protected Setup (WPS) implementations. The JukeBlox platform allows the use of a single software-configurable platform for both embedded/ slave and stand-alone/SOC implementations in consumer entertainment products. It provides a variety of software options and customization capabilities to increase the uniqueness and to scale the value and the functionality of the product.

The JukeBlox SDK consists of the following elements as shown in the following diagram:

- SMSC core libraries providing common functions for the higher software layers
- Middleware consisting of the player for media decoding, playing, and streaming; browser for content access and navigation; controller for overall system control; DLNA, UPnP and AirPlay stacks; Apple® MFI compatible, WWI-compliant protocol stack and control software
- System configuration for easy system-level customizations without programming
- Control and command configuration files for managing and customizing remote control functions
- Resources containing all UI and system resources such as graphics, icons, fonts and language strings
- ViewGlue for the UI look-and-feel

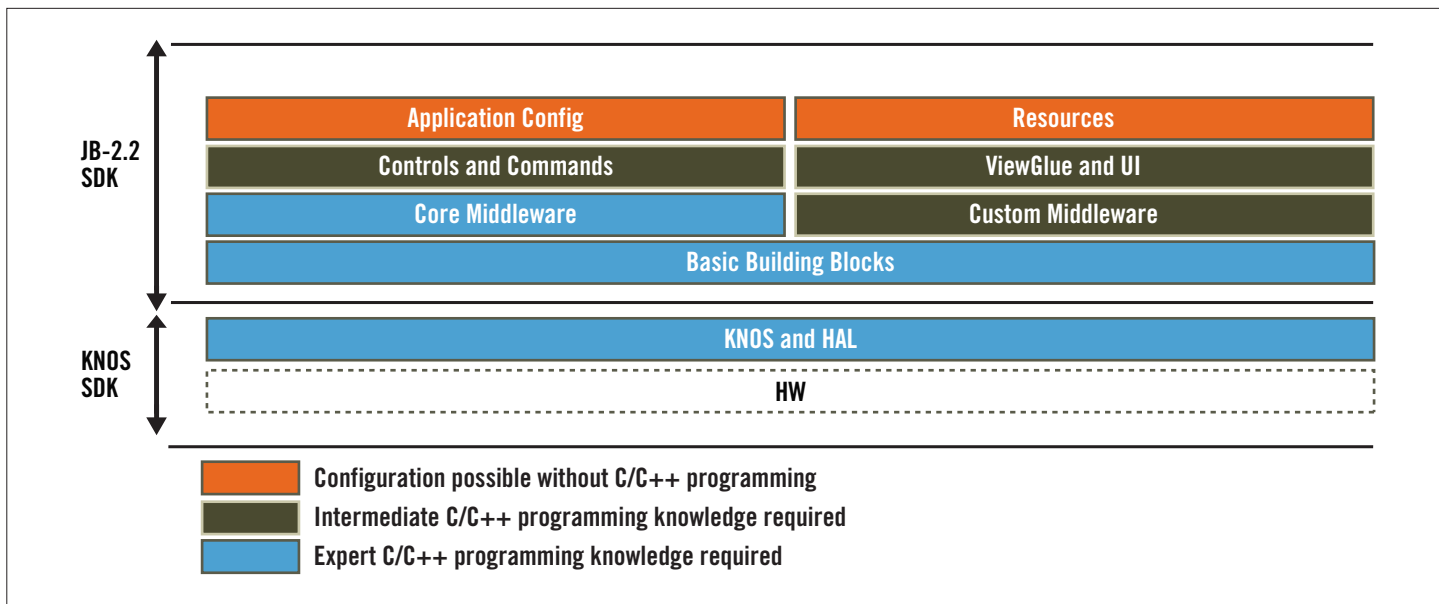

The SDK Framework and API allows for several levels of customization, depending on the need for changes and the expertise of the developer. At the simplest level, the configuration tools can be used to recompile the resources, such as text strings in different languages, splash screens, icons, device name, and device parameters, without the need to modify or recompile the binary application code. When more complicated changes are needed, the source code can be changed and recompiling is needed. This can be done at several levels of increasing complexity:

- Enabling/disabling modules and features
- Modifying UI behavior of the application layer
- Modifying source code of the core functions (eg: GPIO control, DSP control, interface buttons, additional remote control registers, among others)

Summary of Features

Networking and Content Discovery

- AirPlay and iTunes streaming/control
- DLNA 1.5 interoperability
- UPnP AV 1.0
 - Media server control point
 - Media renderer
- Wireless 802.11b/g networking with WMM support
- WEP, WPA, WPA2 and Wi-Fi-compliant
- Wi-Fi Protected Setup (WPS) support
- Network site survey (SSID) and selection
- 10/100 BASE-T wired Ethernet
- Automatic switching between AutoIP and DHCP
- Multiple user-defined network profiles
- USB storage device
- Real-time browsing of 10,000+ radio stations

Audio Support

- MP3, WMA, LPCM, WAV, AAC, AAC+
- Ogg Vorbis, FLAC, FLAC HD
- AM/FM tuner (with or without RDS)
- Multi-channel support
- Up to 192KHz, with 16, 24, or 32-bit output
- S/PDIF outputs

Playlists

- PLS, M3U, ASX

Server Interoperability

- Any DLNA 1.0/1.5-compliant server
- UPnP AV 1.0 media server
- AirPlay-enabled devices/Mac/PC's

Summary of Features (continued)

Premium Content Services

- Rhapsody DNA
- Pandora
- vTuner Internet radio with OEM-branded portal
- Napster
- Last.fm
- SiriusXM

JB Multi-Zone Technology

- Distinctive whole home audio features
- Device discovery, grouping and control
- Synchronized, multi-zone streaming (party mode)

Digital Rights Management

- Windows Media® DRM10
- Rhapsody Radea DRM
- Pandora DRM

International Language Support

- Display technology for western European and Asian languages (UTF8)

User Interface

- Clock with multiple alarms
- Favorites/tag list
- Recently played list
- IR remote control

System Management

- Software upgrade direct from internet
- Web interface for device management
- Auto network discovery and configuration
- NTP and RDS time synchronization
- Power save modes, “wake-up” features

Industry Standards

- Wi-Fi Alliance
- DLNA
- UPnP (Universal Plug and Play)
- Full DMC and DMR support
- Windows Play-To certified
- AirPlay support

JB Technologies

- JB Direct - no network access point needed for playback
- JB Connect - simple Wi-Fi setup
- JB Failsafe - safe system code updates
- JB Green - special low power modes
- JB Multi-Zone - whole home audio
- JB Host – integrated host MCU support
- JB DSP – integrated DSP audio processing
- JB Remote – network control interface/SDK
- JB Green – power save modes, “wake-up” features
- JB Link – easy network setup over wired iPhone connection
- JB QoS – improved Wi-Fi performance and robustness

Software Development Tool Suite

Bootloaders

- 1st and 2nd level bootloader binary files

Non-SDK Development Tools

- Used for products requiring simple customization
- Can make final build firmware without C code compiler
- Oxford Digital Limited's sonic tuning tools *FixFx* and *MajE-Fx* support JB DSP

SDK Deliverables

- Source code for UI modules
- Libraries for core functions
- DM870A specific drivers (Ethernet, Wi-Fi, UART)

Build Tools Required (customer provided)

- RVDS 2.2 (or higher - 3.1 recommended) along with ARM license
- Microsoft Visual Studio® 2005
- Visual MaX 0.37t
- SMSCTool Chains
- Perl 5.10.0
- Python 2.6.2.2
- Microsoft Java Virtual Machine [msjvax86]

The JukeBlox Development and Evaluation Kit

The JukeBlox development hardware platform, the “CE-2” board, consists of the optimized DM870A core-module and a CE-2 base board that includes virtually every option for supporting the complete JukeBlox feature set. The following diagram shows the EVM CE-2 hardware platform that will be included in the SDK kit and our evaluation packages. The on-board QVGA color display and the many I/O options provide a superset of capabilities that supports almost any product application. SMSC will also provide the EVM CE-2 associated schematics, layout and Gerber files to aid in the development of customer projects.



CE-2 Hardware Features

- DM870A Media Processor
- Certified core module with DM870A and integrated Wi-Fi
- Supports development of aDMP or eDMP implementation
- Ethernet port
- QVGA color LCD display
- Color TV out UI support – composite, S-Video, NTSC/PAL
- S/PDIF out support (directly supported in DM870A)
- Analog audio out – line level RCA, headphone mini-jack
- iPod support thru iPod connector or USB (with authentication co-processor)
- I/O media ports: USB 2.0, SD, IDE
- AM/FM/RDS daughter board
- IR remote sensor
- RS-232 serial port (for development interface)
- Board size: 170mm x 174mm (6.7" x 6.8")

*Secure Digital™ (SD) and MultiMediaCard™ (MMC) are registered trademarks or trademarks of their respective holders.



SMSC is committed to working toward a sustainable environment. We endeavor to make continual improvements in natural resource conservation through efficient product design and global operations thereby reducing greenhouse gas emissions generated by our products and facilities. Our environmental life cycle process seeks to reduce our carbon footprint through product life and recyclability and efficient use of materials, energy and transportation. We remain committed to promoting smart energy policies across our global organization.

Copyright ©2012 SMSC or its subsidiaries. All rights reserved. Although the information in this document has been checked and is believed to be accurate, no responsibility is assumed for inaccuracies. SMSC reserves the right to make changes to product descriptions and specifications at any time without notice. Contact your local SMSC sales office to obtain the latest specifications before placing your product order. The provision of this information does not convey any licenses under any patent rights or other intellectual property rights of SMSC or others. All sales are expressly conditional on your agreement to the terms and conditions of the most recently dated version of SMSC's standard Terms of Sale Agreement dated before the date of your order. Products may contain design defects or errors known as anomalies which may cause a product's functions to deviate from published specifications. Anomaly sheets are available upon request. SMSC products are not designed, intended, authorized or warranted for use in any life support or other application where product failure could cause or contribute to personal injury or severe property damage. Any and all such uses without prior written approval of an Officer of SMSC and further testing and/or modification will be fully at the risk of the customer. Copies of this document or other SMSC literature, as well as the Terms of Sale Agreement, may be obtained by visiting SMSC's website at <http://www.smisc.com>. SMSC, the SMSC logo, JukeBlox and the JukeBlox logo are registered trademarks of Standard Microsystems Corporation ("SMSC"). Other names mentioned may be trademarks of their respective holders. All claims made herein speak as of the date of this material. The company does not undertake to update such statements. (03/12)

For RoHS compliance and environmental information,
please visit www.smisc.com/rohs

www.smisc.com

