


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)	0.75			V	$I_F = 0.3\text{mA}$ $I_F = 10\text{mA}$ $V_R = 3\text{V}$ $V = 0, f = 1\text{MHz}$
	Forward Voltage (V_F)				1.5	
	Reverse Current (I_R)			10	μA	
	Capacitance (C_j)			100	pF	
Output	Operating Voltage Range (V_{CC})	3	1.6	15	V	$I_F = 0\text{mA}, V_{CC} = 5\text{V}$ $I_F = 0\text{mA}, V_{CC} = V_O = 15\text{V}$
	Supply Current I_6 (off)			5	mA	
	Output Current High (I_{OH})			100	μA	
Coupled	Supply Current I_6 (on)	0.3	1.6	5	mA	$I_F = 10\text{mA}, V_{CC} = 5\text{V}$ $R_L = 270\Omega, V_{CC} = 5\text{V}$
	Output Voltage, Low (V_{OL})			0.4	V	
	Turn-on Threshold Current I_F (on)					
	H11L1			1.6	mA	
	H11L2			10	mA	
	H11L3			5	mA	
	H11L4			2	mA	
	Turn-off Threshold Current I_F (off)					
	Hysteresis Ratio I_F (off) / I_F (on)			0.9		
	Input to Output Isolation Voltage V_{ISO}			5000	V_{RMS}	
				7000	V_{PK}	
	High to Low Propagation time t_{PHL}			1	μs	
	Fall Time t_f			0.05	μs	
	Low to High Propagation time t_{PLH}			2	μs	
	Rise Time t_r			0.1	μs	


Note 1 Measured with input leads shorted together and output leads shorted together for 1 minute

Note 2 Special Selections are available on request. Please consult the factory.


SWITCHING CHARACTERISTICS

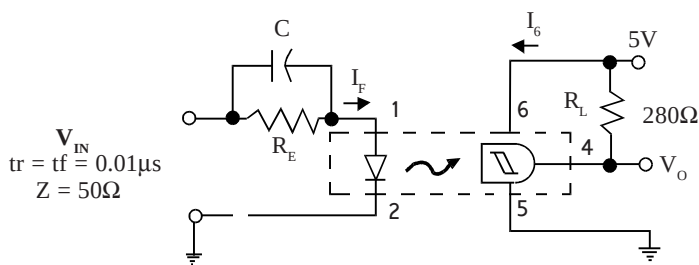


SWITCHING TEST CIRCUIT

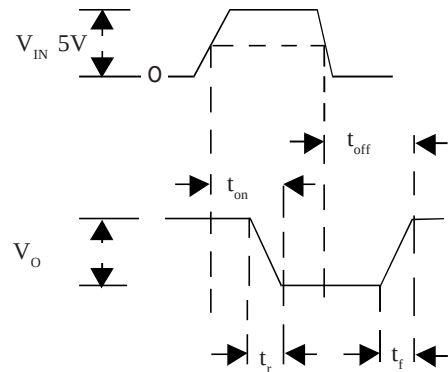


Transfer Characteristics

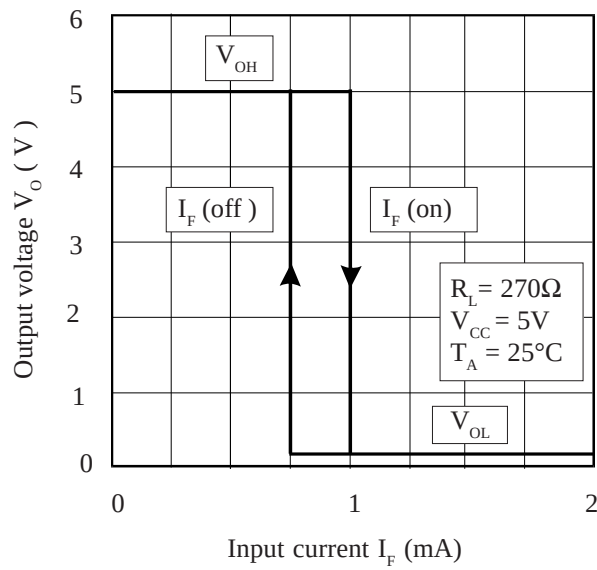


On Voltage vs. Load Current

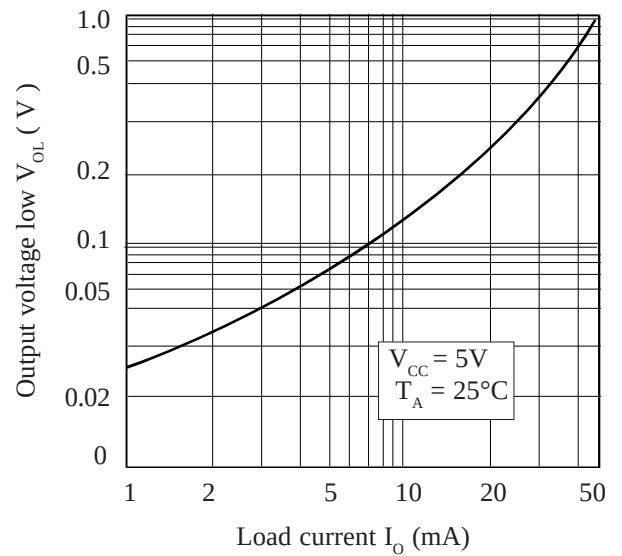


Threshold Current vs. Supply Voltage

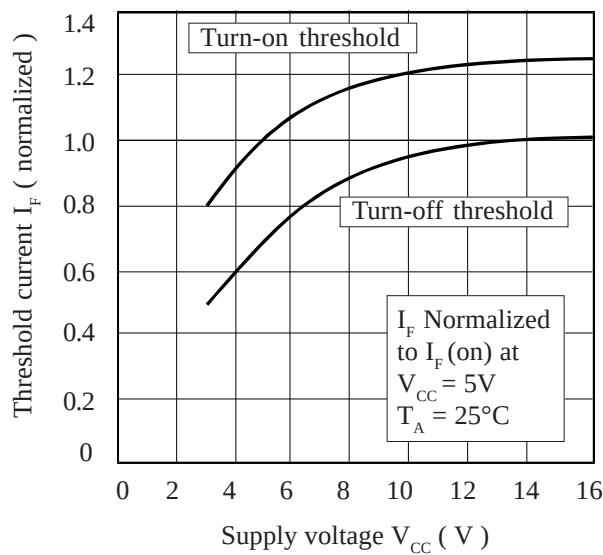

Forward Voltage vs. Forward Current

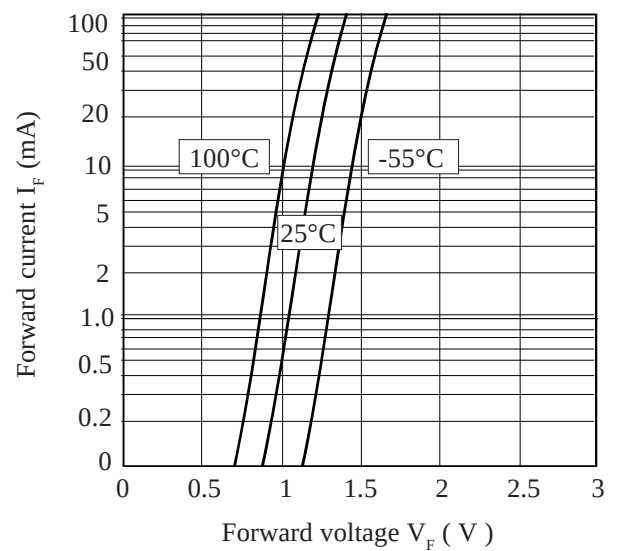

Threshold Current vs. Ambient Temperature

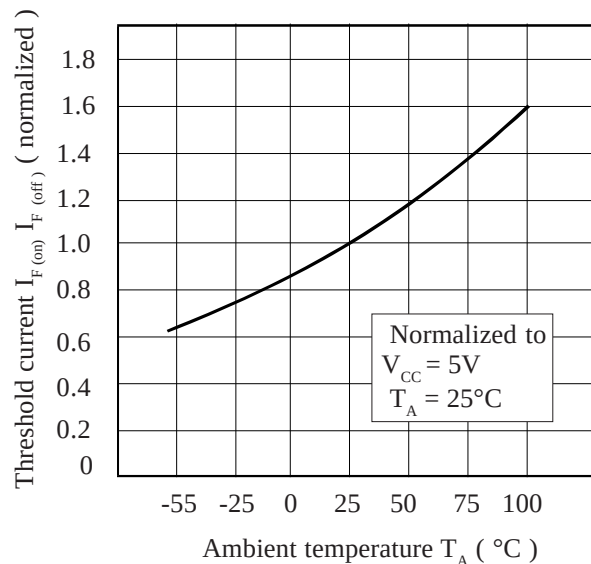

Supply Current vs. Supply Voltage

