Characteristics SLVU2.8

1 **Characteristics**


Absolute ratings ($T_{amb} = 25 \, ^{\circ}C$) Table 1.

Symbol	Parameter	Value	Unit
P _{PP}	Peak pulse power (8/20 μs)	600	W
I _{PP}	Peak pulse current (8/20 μs)	30	Α
T _{stg}	Storage temperature range	-65 to + 150	°C
T _j	Maximum junction temperaturee	-55 to + 150	°C
T _L	Maximum lead temperature for soldering during 10 s.	260	°C

Electrical characteristics values (T_{amb} = 25 °C) Table 2.


	I _{RM} @V _{RM}			V _{CL @} I _{PP}		V _{CL @} I _{PP} 8/20 μs		C I/O to I/O		
Order code	typ.	max.	max. 85 °C		max.		max.		typ.	max.
	nA	μΑ	μΑ	V	V	Α	V	Α	pF	pF
SLVU2.8-4A1	2	0.2	1	2.8	15	24	12	12	1.5	2.5
SLVU2.8-8A1	2	0.2	1	2.8	15	24	12	12	3	5


Figure 1. **Pulse waveform**

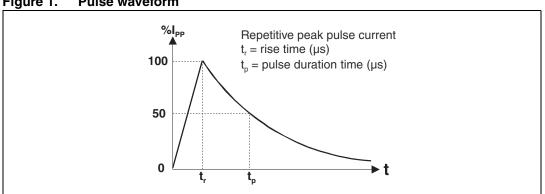

SLVU2.8 Characteristics

Figure 2. Relative peak pulse power versus initial junction temperature



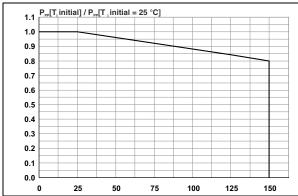

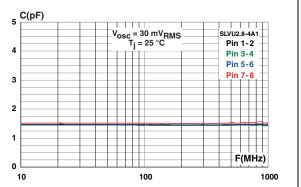
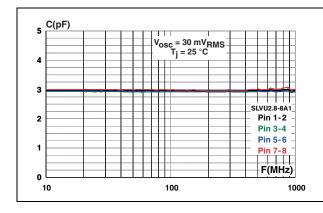


Figure 4. Junction capacitance versus frequency (SLVU2.8-8A1)

Figure 5. Junction capacitance versus reverse applied voltage (typical values)





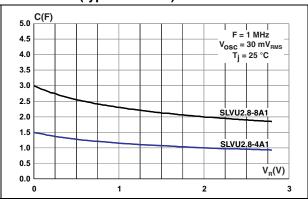


Figure 6. Leakage current versus junction temperature (typical values)

Figure 7. S21 attenuation (typical value)

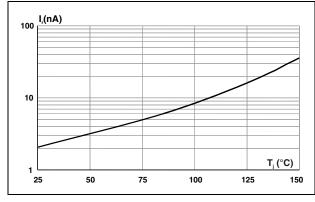

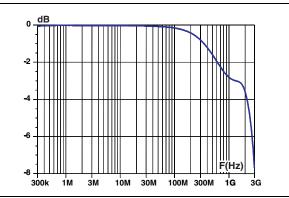

Characteristics SLVU2.8

Figure 8. Connection for 10/100 Mbps Ethernet with SLVU2.8-4A1

Figure 9. Connection for 1G Ethernet with SLVU2.8-8A1


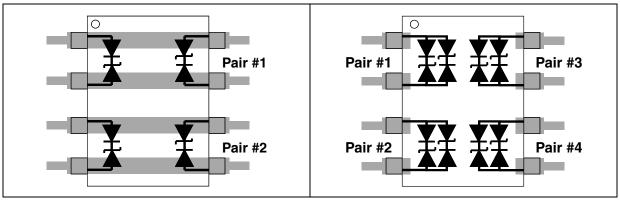


Figure 10. Schematic for 10/100 Mbps Ethernet

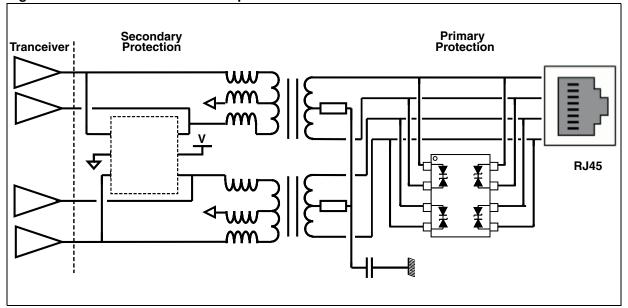

57

Secondary Protection (optional)


Tranceiver Primary Primary Protection

Figure 11. Schematic for 1 Gbps Ethernet

1. For further information, refer to application note: AN3007

2 Ordering information scheme

Figure 12. Ordering information scheme

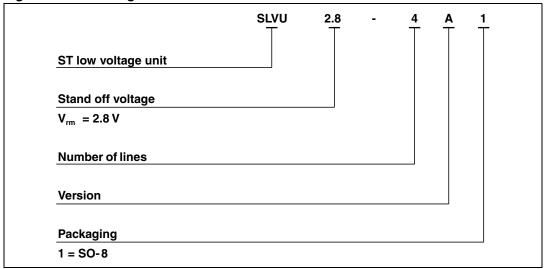

Package information SLVU2.8

3 Package information

- Case: JEDEC SO-8 molded plastic over planar junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Flammability: Epoxy is rated UL94V-0
- RoHS package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Table 3. SO-8 dimensions


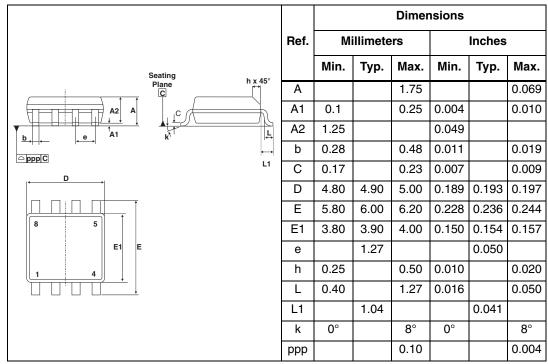


Figure 13. Foot print recommendations Figure 14. Marking

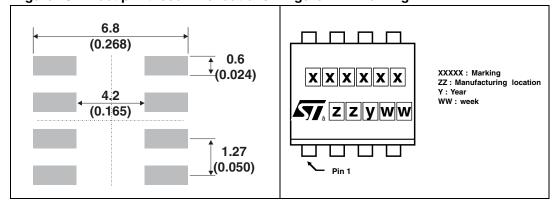

6/8 Doc ID 16191 Rev 2

4 Ordering information

Table 4. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
SLVU2.8-4A1	SLVU284	SO-8	78 mg	2500	Tape and reel
SLVU2.8-8A1	SLVU288	SO-8	78 mg	2500	Tape and reel

5 Revision history

Table 5. Document revision history

Date	Revision Changes	
01-Sep-2009	1	Initial release.
31-May-2011	2	Updated Ethernet standard compatibility on the cover page.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Doc ID 16191 Rev 2

8/8