

5.0SMDJxxS Series

Single Chip Design

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)



Part Number (Uni)	Part Number (Bi)	Marking		Reverse Stand off Voltage V_R (Volts)	Break-down Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (10/1000 μs) (V)	Maximum Peak Pulse Current I_{PP} (10/1000 μs) (A)	Maximum Clamping Voltage V_C @ I_{PP} (8/20 μs) (V)	Maximum Peak Pulse Current I_{PP} (8/20 μs) (A)	Maximum Reverse Leakage I_R @ V_R (μA)	Maximum Temperature coefficient of V_{BR} (%/C)	Agency Approval
		UNI	BI		Min	Max								
5.0SMDJ6.0AS	5.0SMDJ6.0CAS	5PAB	5BAB	6.0	6.67	7.37	10	10.3	485.4	13.3	2669.7	800.0	0.046	X
5.0SMDJ6.5AS	5.0SMDJ6.5CAS	5PAE	5BAE	6.5	7.22	7.98	10	11.2	446.4	14.5	2455.2	500.0	0.052	X
5.0SMDJ7.0AS	5.0SMDJ7.0CAS	5PAF	5BAF	7.0	7.78	8.60	10	12.0	416.7	15.5	2291.9	200.0	0.058	X
5.0SMDJ7.5AS	5.0SMDJ7.5CAS	5PAG	5BAG	7.5	8.33	9.21	1	12.9	387.6	16.7	2131.8	100.0	0.061	X
5.0SMDJ8.0AS	5.0SMDJ8.0CAS	5PAK	5BAK	8.0	8.89	9.83	1	13.6	367.6	17.6	2021.8	50.0	0.064	X
5.0SMDJ8.5AS	5.0SMDJ8.5CAS	5PAM	5BAM	8.5	9.44	10.4	1	14.4	347.2	18.6	1909.6	20.0	0.066	X
5.0SMDJ9.0AS	5.0SMDJ9.0CAS	5PAP	5BAP	9.0	10.0	11.1	1	15.4	324.7	19.9	1785.9	10.0	0.069	X
5.0SMDJ10AS	5.0SMDJ10CAS	5PAR	5BAR	10.0	11.1	12.3	1	17.0	294.1	22.0	1617.6	5.0	0.071	X
5.0SMDJ11AS	5.0SMDJ11CAS	5PAT	5BAT	11.0	12.2	13.5	1	18.2	274.7	23.5	1510.9	2.0	0.074	X
5.0SMDJ12AS	5.0SMDJ12CAS	5PAV	5BAV	12.0	13.3	14.7	1	19.9	251.3	25.7	1382.2	2.0	0.075	X
5.0SMDJ13AS	5.0SMDJ13CAS	5PAX	5BAX	13.0	14.4	15.9	1	21.5	232.6	27.8	1279.3	2.0	0.076	X
5.0SMDJ14AS	5.0SMDJ14CAS	5PAZ	5BAZ	14.0	15.6	17.2	1	23.2	215.5	30.0	1185.3	2.0	0.080	X
5.0SMDJ15AS	5.0SMDJ15CAS	5PBE	5BBE	15.0	16.7	18.5	1	24.4	204.9	31.5	1127.0	2.0	0.083	X
5.0SMDJ16AS	5.0SMDJ16CAS	5PBG	5BBG	16.0	17.8	19.7	1	26.0	192.3	33.6	1057.7	2.0	0.084	X
5.0SMDJ17AS	5.0SMDJ17CAS	5PBK	5BBK	17.0	18.9	20.9	1	27.6	181.2	35.7	996.6	2.0	0.085	X
5.0SMDJ18AS	5.0SMDJ18CAS	5PBM	5BBM	18.0	20.0	22.1	1	29.2	171.2	37.7	941.6	2.0	0.088	X
5.0SMDJ20AS	5.0SMDJ20CAS	5PBP	5BBP	20.0	22.2	24.5	1	32.4	154.3	41.9	848.7	2.0	0.091	X
5.0SMDJ22AS	5.0SMDJ22CAS	5PBR	5BBR	22.0	24.4	26.9	1	35.5	140.8	45.9	774.4	2.0	0.092	X
5.0SMDJ24AS	5.0SMDJ24CAS	5PBT	5BBT	24.0	26.7	29.5	1	38.9	128.5	50.3	706.8	2.0	0.092	X
5.0SMDJ26AS	5.0SMDJ26CAS	5PBV	5BBV	26.0	28.9	31.9	1	42.1	118.8	54.4	653.4	2.0	0.093	X
5.0SMDJ28AS	5.0SMDJ28CAS	5PBX	5BBX	28.0	31.1	34.4	1	45.4	110.1	58.7	605.6	2.0	0.094	X
5.0SMDJ30AS	5.0SMDJ30CAS	5PBZ	5BBZ	30.0	33.3	36.8	1	48.4	103.3	62.5	568.2	2.0	0.096	X
5.0SMDJ33AS	-	5PCB	-	33.0	36.7	40.6	1	53.3	93.9	68.9	516.5	2.0	0.097	X
-	5.0SMDJ33CAS	-	5BCB	33.0	36.7	40.6	1	53.3	84.4	68.9	516.5	2.0	0.097	X
5.0SMDJ36AS	-	5PCE	-	36.0	40.0	44.2	1	58.1	86.1	75.1	430.5	2.0	0.098	X
-	5.0SMDJ36CAS	-	5BCE	36.0	40.0	44.2	1	58.1	77.5	75.1	430.5	2.0	0.098	X
5.0SMDJ40AS	-	5PCF	-	40.0	44.4	49.1	1	64.5	77.6	83.3	388.0	2.0	0.099	X
-	5.0SMDJ40CAS	-	5BCF	40.0	44.4	49.1	1	64.5	69.8	83.3	388.0	2.0	0.099	X
5.0SMDJ43AS	-	5PCG	-	43.0	47.8	52.8	1	69.4	72.1	89.7	360.5	2.0	0.100	X
-	5.0SMDJ43CAS	-	5BCG	43.0	47.8	52.8	1	69.4	64.8	89.7	360.5	2.0	0.100	X
5.0SMDJ45AS	-	5PCK	-	45.0	50.0	55.3	1	72.7	68.8	93.9	344.0	2.0	0.101	X
-	5.0SMDJ45CAS	-	5BCK	45.0	50.0	55.3	1	72.7	61.9	93.9	344.0	2.0	0.101	X
5.0SMDJ48AS	-	5PCM	-	48.0	53.3	58.9	1	77.4	64.7	100.0	323.5	2.0	0.101	X
-	5.0SMDJ48CAS	-	5BCM	48.0	53.3	58.9	1	77.4	58.1	100.0	323.5	2.0	0.101	X
5.0SMDJ51AS	-	5PCP	-	51.0	56.7	62.7	1	82.4	60.7	106.5	303.5	2.0	0.101	X
-	5.0SMDJ51CAS	-	5BCP	51.0	56.7	62.7	1	82.4	54.6	106.5	303.5	2.0	0.101	X
5.0SMDJ54AS	-	5PCR	-	54.0	60.0	66.3	1	87.1	57.5	112.5	287.5	2.0	0.102	X
-	5.0SMDJ54CAS	-	5BCR	54.0	60.0	66.3	1	87.1	51.7	112.5	287.5	2.0	0.102	X
5.0SMDJ58AS	-	5PCT	-	58.0	64.4	71.2	1	93.6	53.5	120.9	267.5	2.0	0.103	X
-	5.0SMDJ58CAS	-	5BCT	58.0	64.4	71.2	1	93.6	48.1	120.9	267.5	2.0	0.103	X
5.0SMDJ60AS	-	5PCV	-	60.0	66.7	73.7	1	96.8	51.7	125.1	258.5	2.0	0.103	X
5.0SMDJ64AS	-	5PCX	-	64.0	71.1	78.6	1	103.0	43.7	133.1	243.0	2.0	0.104	X
5.0SMDJ70AS	-	5PCZ	-	70.0	77.8	86.0	1	113.0	39.9	146.0	221.5	2.0	0.105	X

For bidirectional type having V_R of 10 volts and less, the I_R limit is double.

5.0SMDJxxS Series

Single Chip Design

I-V Curve Characteristics

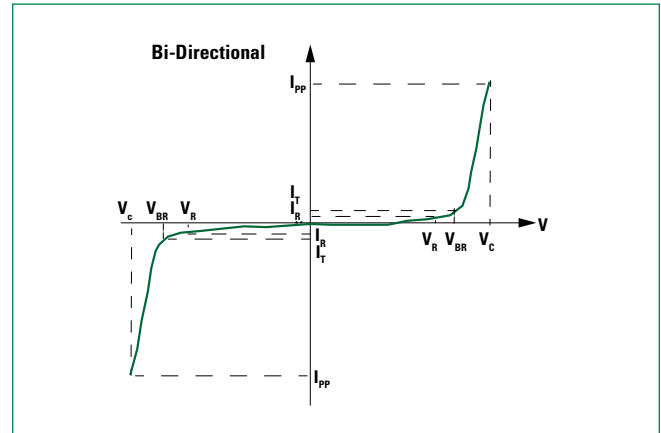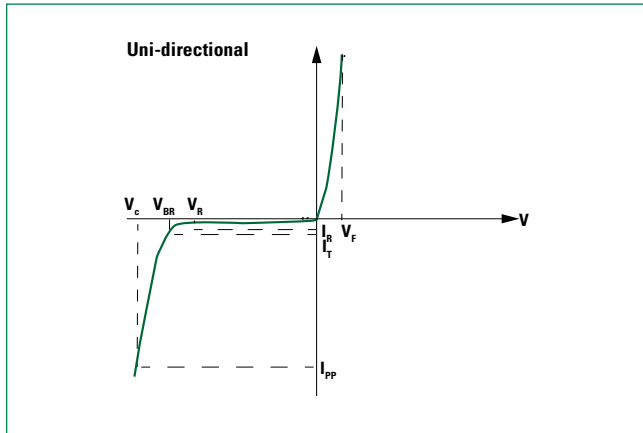

P_{PPM} Peak Pulse Power Dissipation – Max power dissipation
 V_R Stand-off Voltage – Maximum voltage that can be applied to the TVS without operation
 V_{BR} Breakdown Voltage – Maximum voltage that flows through the TVS at a specified test current (I_T)
 V_C Clamping Voltage – Peak voltage measured across the TVS at a specified I_{PPM} (peak impulse current)
 I_R Reverse Leakage Current – Current measured at V_R
 V_F Forward Voltage Drop for Uni-directional

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Figure 1:
TVS Transients Clamping Waveform


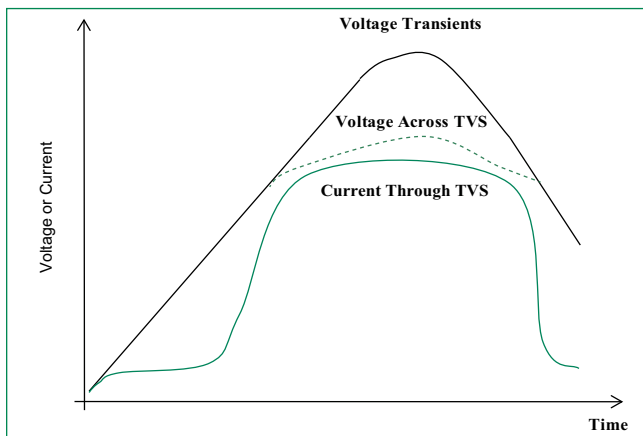


Figure 2:
Peak Pulse Power Rating

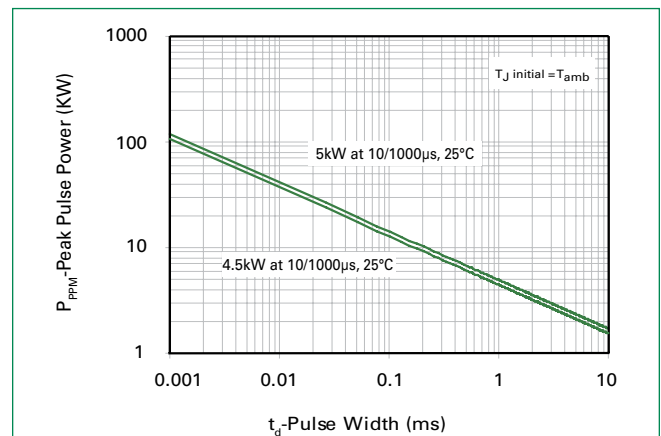

5.0SMDJxxS Series

Single Chip Design

Figure 3:
Peak Pulse Power Derating Curve

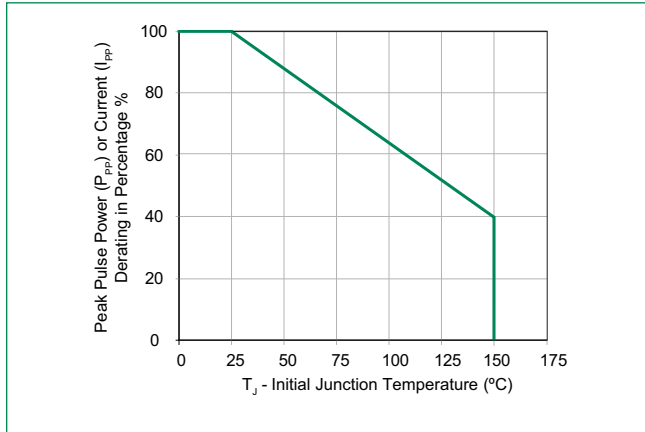


Figure 4:
Pulse Waveform

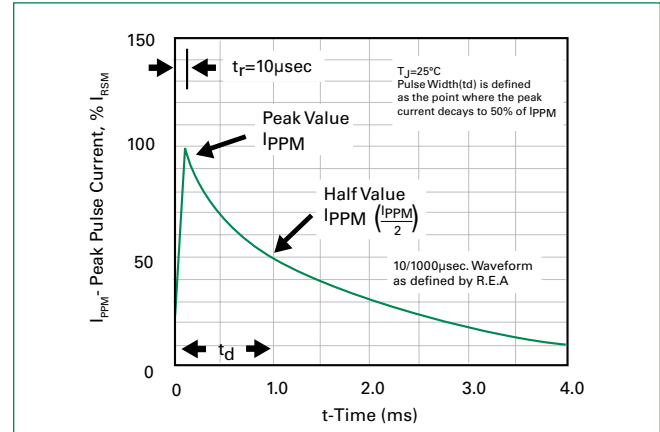


Figure 5:
Typical Junction Capacitance

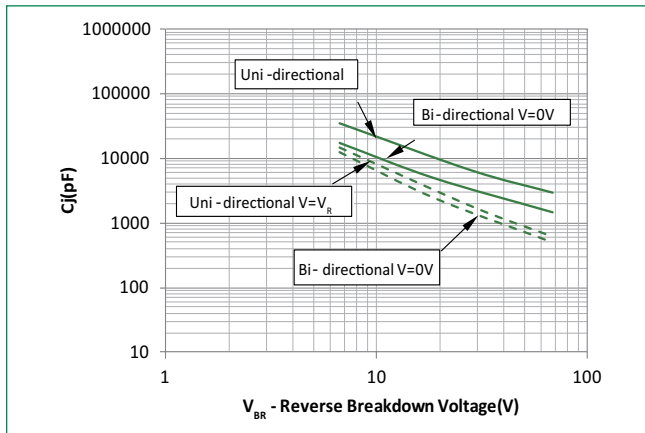


Figure 6:
Typical Transient Thermal Impedance

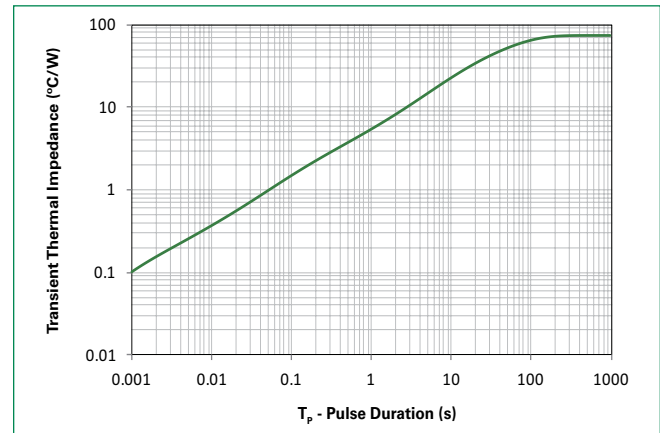


Figure 7:
Maximum Non-Repetitive Peak Forward Surge Current
Uni-Directional Only


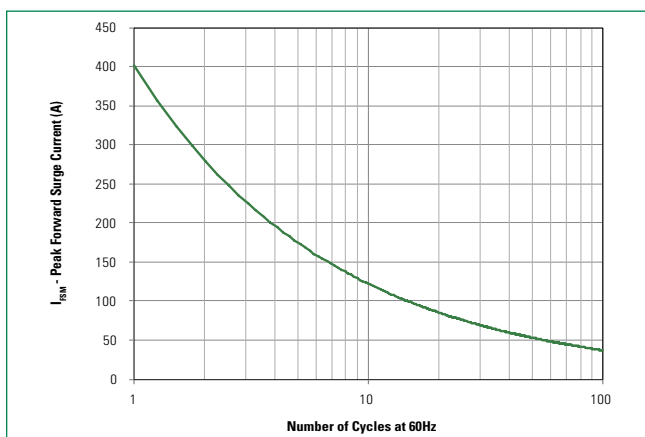


Figure 8:
Peak Forward Voltage Drop vs Peak Forward Current
(Typical Values)

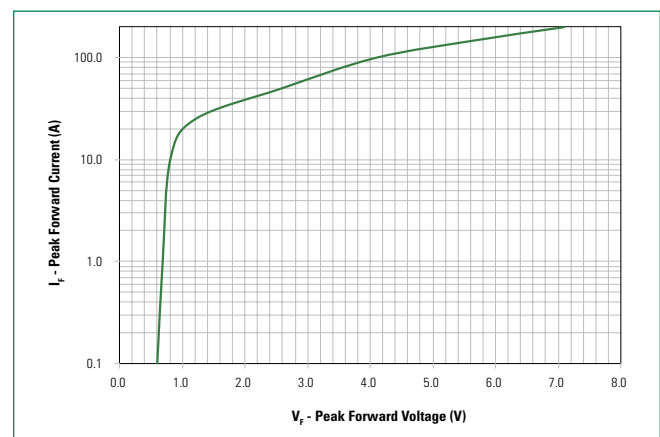


5.0SMDJxxS Series

Single Chip Design

Soldering Parameters

Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_L)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

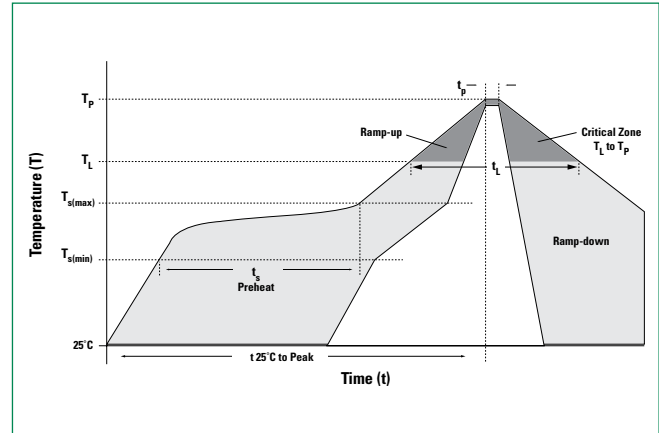


Physical Specifications

Weight	0.007 ounce, 0.21 grams
Case	JEDEC DO214AB. Molded compound body over glass passivated junction
Polarity	Color band denotes positive end (cathode) except for bidirectional versions.
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102

Environmental Specifications

High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Temperature Cycling	JESD22-A104
MSL	JEDEC-J-STD-020, Level 1
H3TRB	JESD22-A101
RSH	JESD22-A111

Dimensions

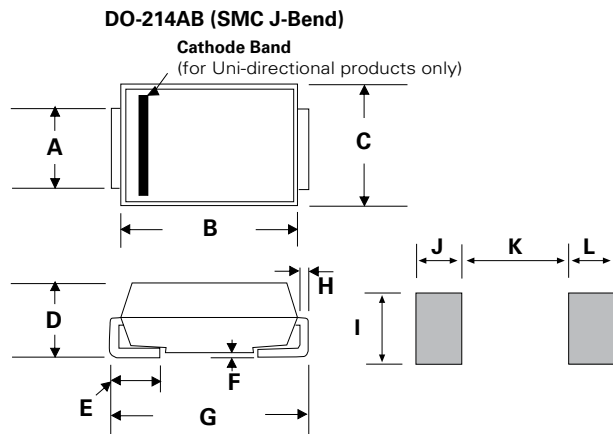

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.114	0.126	2.900	3.200
B	0.260	0.280	6.600	7.110
C	0.220	0.245	5.590	6.220
D	0.079	0.103	2.060	2.620
E	0.030	0.060	0.760	1.520
F	-	0.008	-	0.203
G	0.305	0.320	7.750	8.130
H	0.006	0.012	0.152	0.305
I	0.129	-	3.300	-
J	0.094	-	2.400	-
K	-	0.165	-	4.200
L	0.094	-	2.400	-


5.0SMDJxxS Series

Single Chip Design


Packaging Options

Part number	Component Package	Quantity	Packaging Option	Packaging Specification
5.0SMDJxxXS	DO-214AB	3000	Tape & Reel - 16mm tape/13" reel	EIA STD RS-481


Part Numbering System

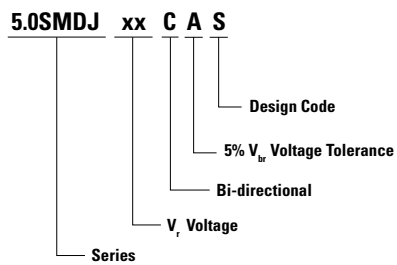

Part Marking System



Tape and Reel Specification

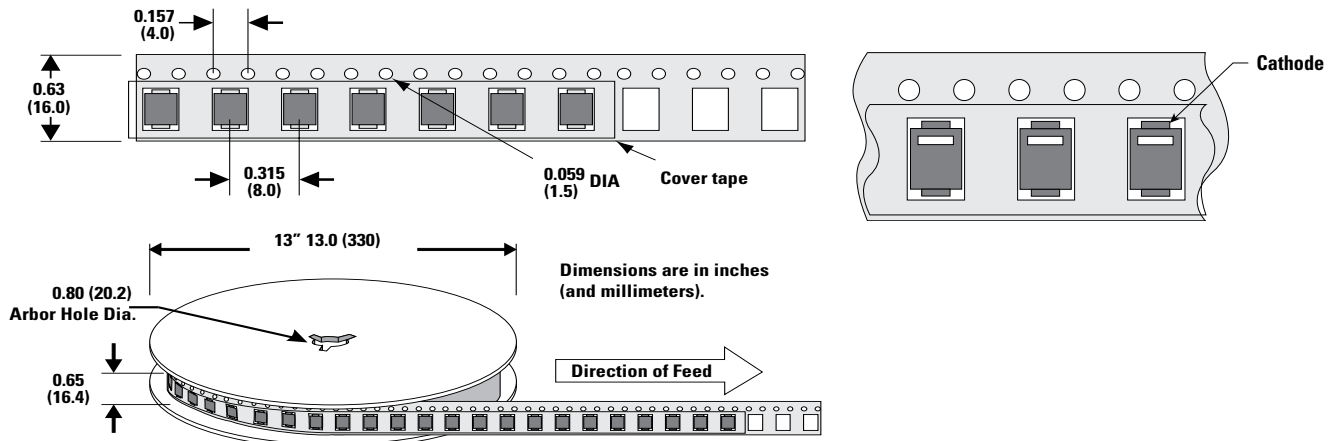

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.