



MECHANICAL DIMENSIONS



DIMENSIONS OF TAPE (UNIT:mm)

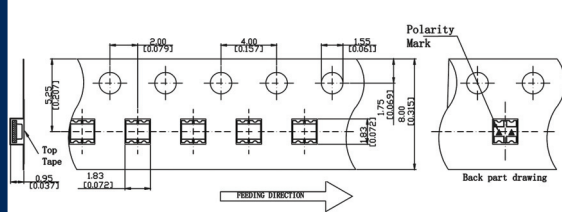

DIMENSIONS OF REEL (UNIT:mm)

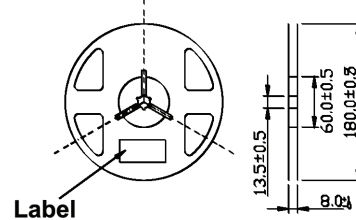

Recommended Soldering Pattern For Reflow Soldering

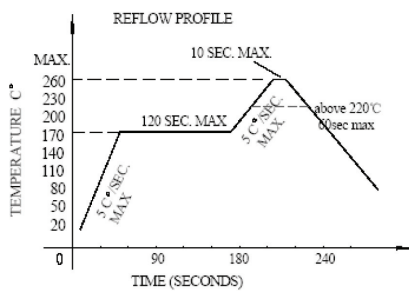


REFLOW SOLDERING		HAND SOLDERING	
Pre-heat	160~180°C	Temperature	300°C Max.
Pre-heat time	120 seconds Max.		
Peak temperature	260°C Max.	Soldering time	3 second Max (one time only)
Soldering time	10 seconds Max.		
Condition	Refer to temperature -profile		


OPTICAL AND ELECTRICAL CHARACTERISTICS CURVES

RED 630-642NM, RED-ORANGE 620-630NM, ORANGE 600-610NM, YELLOW 590-595NM, YELLOW 583-590NM, YELLOW GREEN 570-575NM, GREEN 562-570NM


FORWARD VOLTAGE VS FORWARD CURRENT (Ta=25°C)




RELATIVE INTENSITY VS FORWARD CURRENT (Ta=25°C)



DERATING




RELATIVE INTENSITY VS AMBIENT TEMPERATURE




GREEN 520-525NM, BLUE 470-475NM


FORWARD VOLTAGE VS FORWARD CURRENT (Ta=25°C)




RELATIVE INTENSITY VS FORWARD CURRENT (Ta=25°C)



DERATING



RELATIVE INTENSITY VS AMBIENT TEMPERATURE



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



A4703



ISO 9001



MDEI5980606BI_A