

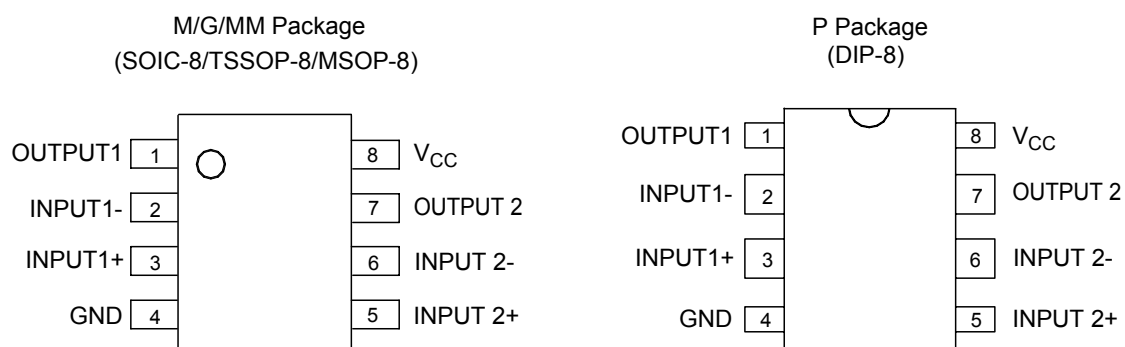
**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Pin Configuration**

Figure 2. Pin Configuration of AS393/393A (Top View)

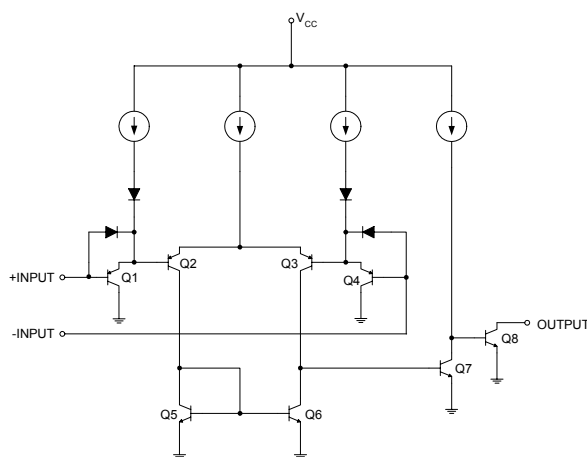
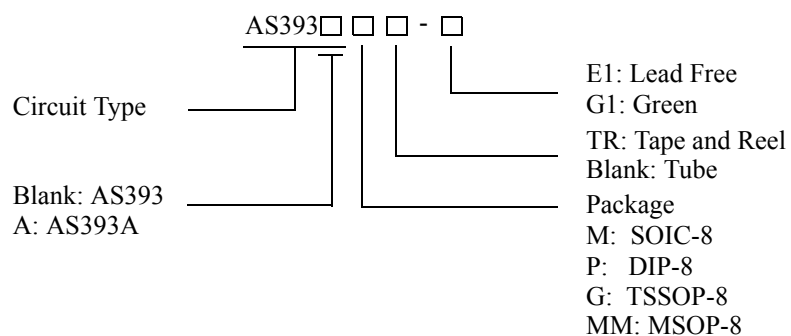
Functional Block Diagram

Figure 3. Functional Block Diagram of AS393/393A (Each comparator)

**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Ordering Information**

Package	Temperature Range	Part Number		Marking ID		Packing Type
		Lead Free	Green	Lead Free	Green	
SOIC-8	-40 to 85°C	AS393M-E1	AS393M-G1	AS393M-E1	AS393M-G1	Tube
		AS393MTR-E1	AS393MTR-G1	AS393M-E1	AS393M-G1	Tape & Reel
		AS393AM-E1	AS393AM-G1	AS393AM-E1	AS393AM-G1	Tube
		AS393AMTR-E1	AS393AMTR-G1	AS393AM-E1	AS393AM-G1	Tape & Reel
DIP-8	-40 to 85°C	AS393P-E1	AS393P-G1	AS393P-E1	AS393P-G1	Tube
		AS393AP-E1	AS393AP-G1	AS393AP-E1	AS393AP-G1	Tube
TSSOP-8	-40 to 85°C	AS393G-E1	AS393G-G1	EG3C	GG3C	Tube
		AS393GTR-E1	AS393GTR-G1	EG3C	GG3C	Tape & Reel
MSOP-8	-40 to 85°C		AS393MM-G1		AS393MM-G1	Tube
			AS393MMTR-G1		AS393MM-G1	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Absolute Maximum Ratings (Note 1)**

Parameter	Symbol	Value		Unit
Supply Voltage	V_{CC}	40		V
Differential Input Voltage	V_{ID}	40		V
Input Voltage	V_{IN}	-0.3 to 40		V
Input Current ($V_{IN} < -0.3V$) (Note 2)	I_{IN}	50		mA
Output Short-Circuit Current to Ground		Continuous		
Power Dissipation ($T_A=25^{\circ}C$)	P_D	DIP-8	780	mW
		SOIC-8	660	
		TSSOP-8	570	
		MSOP-8	450	
Operating Junction Temperature	T_J	150		$^{\circ}C$
Storage Temperature	T_{STG}	-65 to 150		$^{\circ}C$
Lead Temperature (Soldering, 10 sec)	T_{LEAD}	260		$^{\circ}C$

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: This input current will only exist when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistors becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also lateral NPN parasitic transistor action on the IC chip. This transistor action can cause the output voltages of the comparators to go to the $V+$ voltage level (or to ground for a large overdrive) for the time duration that an input is driven negative. This is not destructive and normal output states will re-establish when the input voltage, which was negative, again returns to a value greater than $-0.3 V_{DC}$ (at $25^{\circ}C$).

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}	2	36	V
Operating Temperature Range	T_A	-40	85	$^{\circ}C$

**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Electrical Characteristics**

Limits in standard typeface are for $T_A=25^{\circ}\text{C}$, **bold** typeface applies over $T_A=-40^{\circ}\text{C}$ to 85°C (Note 3), $V_{CC}=5\text{V}$, $\text{GND}=0\text{V}$, unless otherwise specified.

Parameter	Conditions		Min	Typ	Max	Unit
Input Offset Voltage	$V_O=1.4V$, $R_S=0\Omega$ $V_{CC}=5V$ to $30V$	AS393		1.0	5.0	mV
					7	
		AS393A		1.0	3.0	
					5	
Input Bias Current	I_{IN}^{+} or I_{IN}^{-} with output in Linear Range, $V_{CM}=0V$			25	250	nA
					400	
Input Offset Current	$I_{IN}^{+}-I_{IN}^{-}$, $V_{CM}=0V$			5.0	50	nA
					200	
Input Common Mode Voltage Range (Note 4)	$V_{CC}=30V$		0		$V_{CC}-1.5$	V
Supply Current	$R_L=\infty$	$V_{CC}=5V$		0.6	1.0	mA
					2	
		$V_{CC}=30V$		0.7	1.7	
					3	
Voltage Gain	$V_{CC}=15V$, $R_L\geq 15k\Omega$, $V_O=1V$ to $11V$		50	200		V/mV
Large Signal Response Time	$V_{IN}=\text{TTL Logic Swing}$, $V_{REF}=1.4V$, $V_{RL}=5V$, $R_L=5.1k$			200		ns
Response Time	$V_{RL}=5V$, $R_L=5.1K$			1.3		μs
Output Sink Current	$V_{IN-}=1V$, $V_{IN+}=0$, $V_O=1.5V$		6.0	16		mA
Output LeakageCurrent	$V_{IN-}=0V$, $V_{IN+}=1V$, $V_O=5V$			0.1		nA
	$V_{IN-}=0V$, $V_{IN+}=1V$, $V_O=30V$				1	μA
Saturation Voltage	$V_{IN-}=1V$, $V_{IN+}=0$, $I_{SINK}\leq 4mA$			200	400	mV
					500	
Thermal Resistance (Junction to Case)	DIP-8			93		$^{\circ}C/W$
	SOIC-8			138		

Note 3: These specifications are limited to $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$. Limits over temperature are guaranteed by design, but not tested in production.

Note 4: The input common-mode voltage of either input signal voltage should not be allowed to go negatively by more than 0.3V (at 25°C). The upper end of the common-mode voltage range is $V_{CC}-1.5\text{V}$ (at 25°C), but either or both inputs can go to $+36\text{V}$ without damages, independent of the magnitude of the V_{CC} .



Typical Performance Characteristics

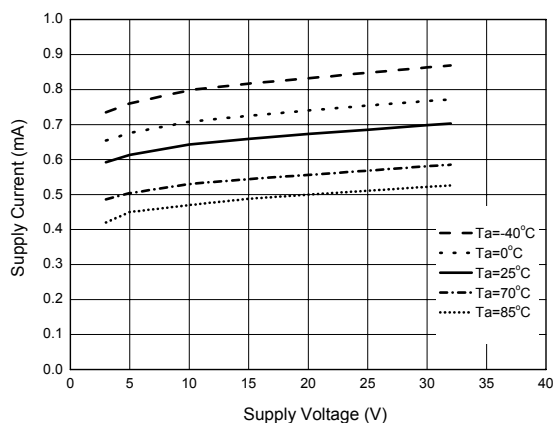


Figure 4. Supply Voltage vs. Supply Current

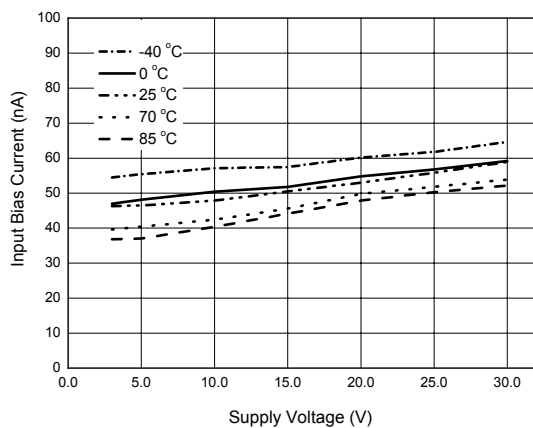


Figure 5. Supply Voltage vs. Input Bias Current

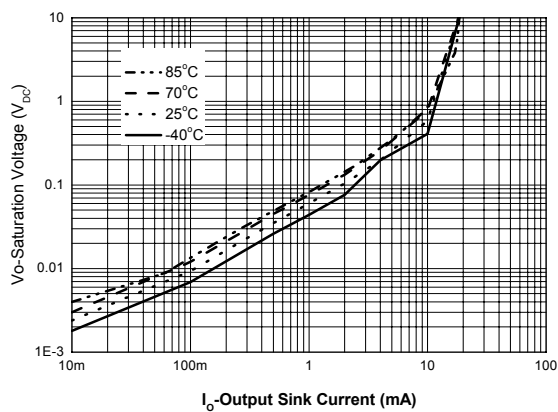


Figure 6. Output Sink Current vs. Saturation Voltage

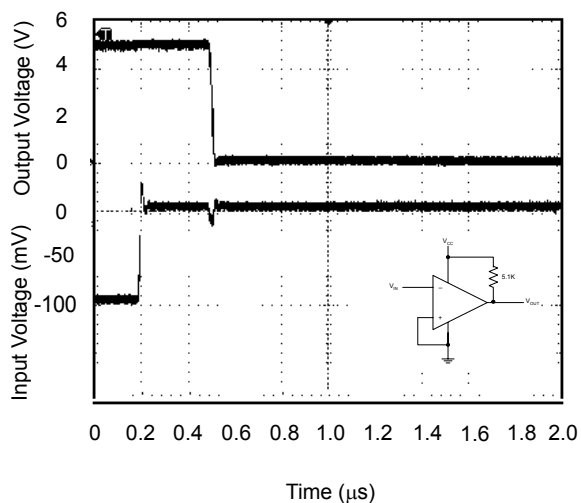


Figure 7. Response Time for 5mV Input Overdrive - Negative Transition



Typical Performance Characteristics (Continued)

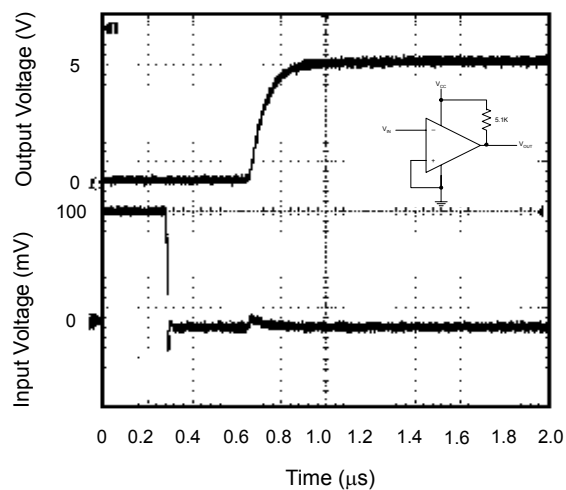


Figure 8. Response Time for 5mV Input Overdrive - Positive Transition

Typical Applications

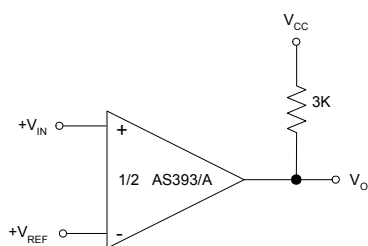


Figure 9. Basic Comparator

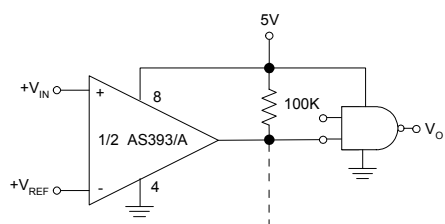


Figure 10. Driving CMOS

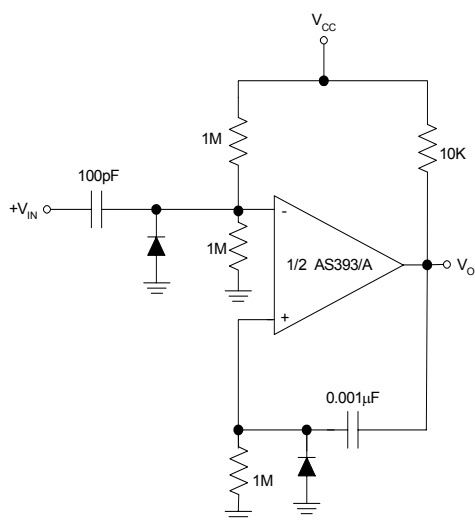
**Typical Applications (Continued)**

Figure 11. One Shot Multivibrator

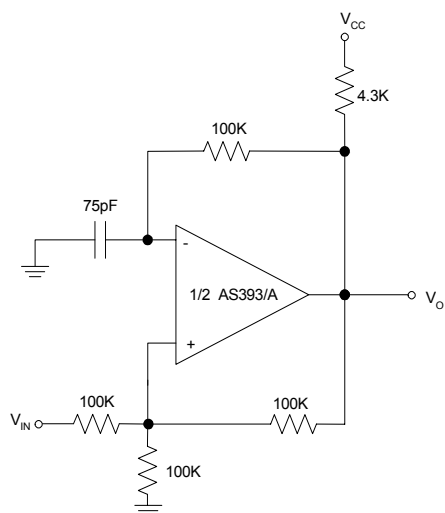
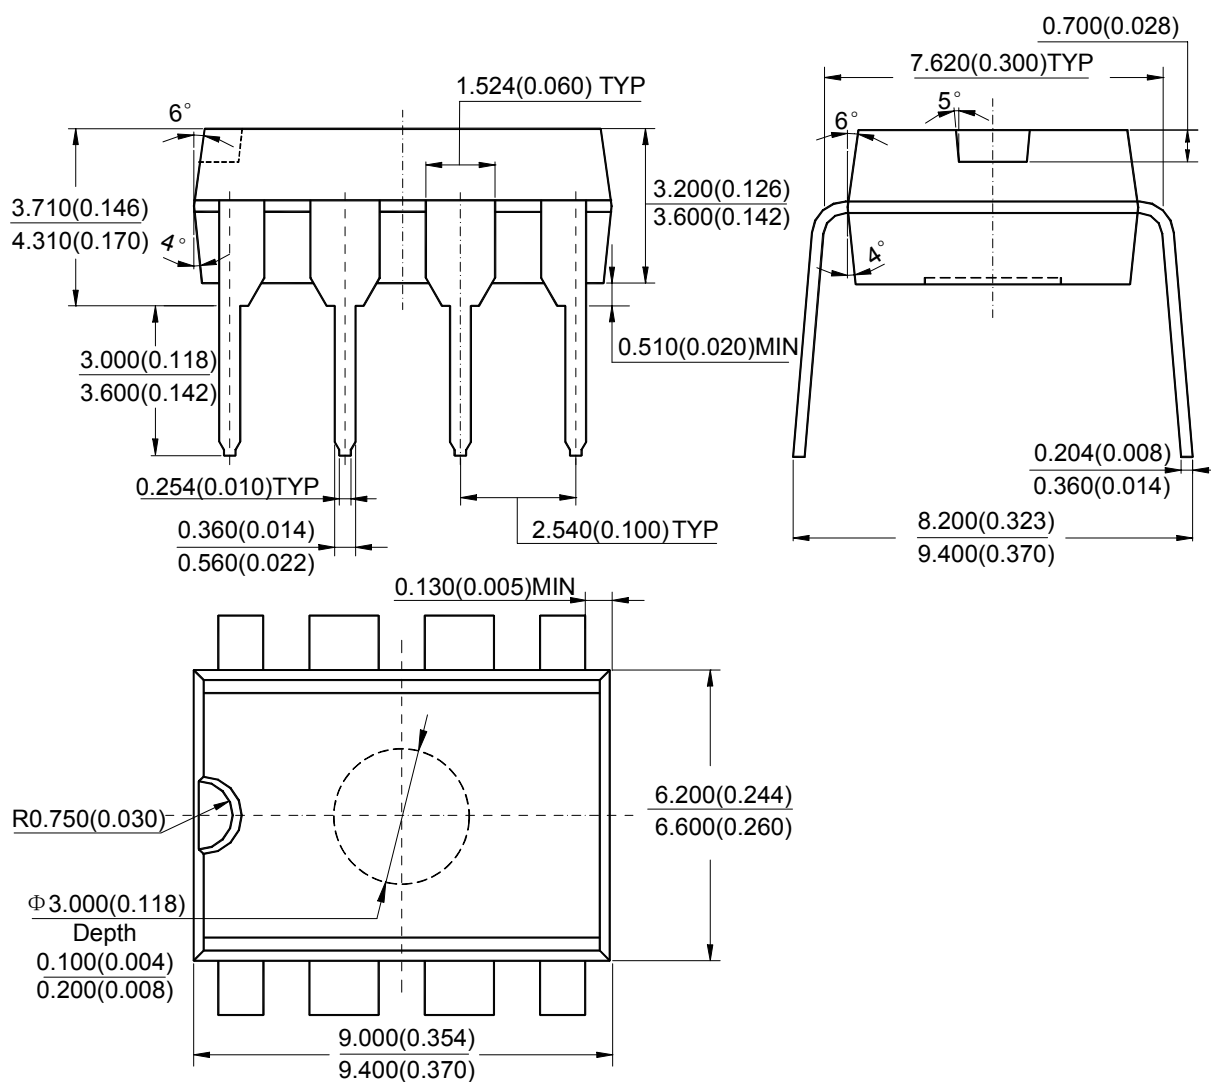
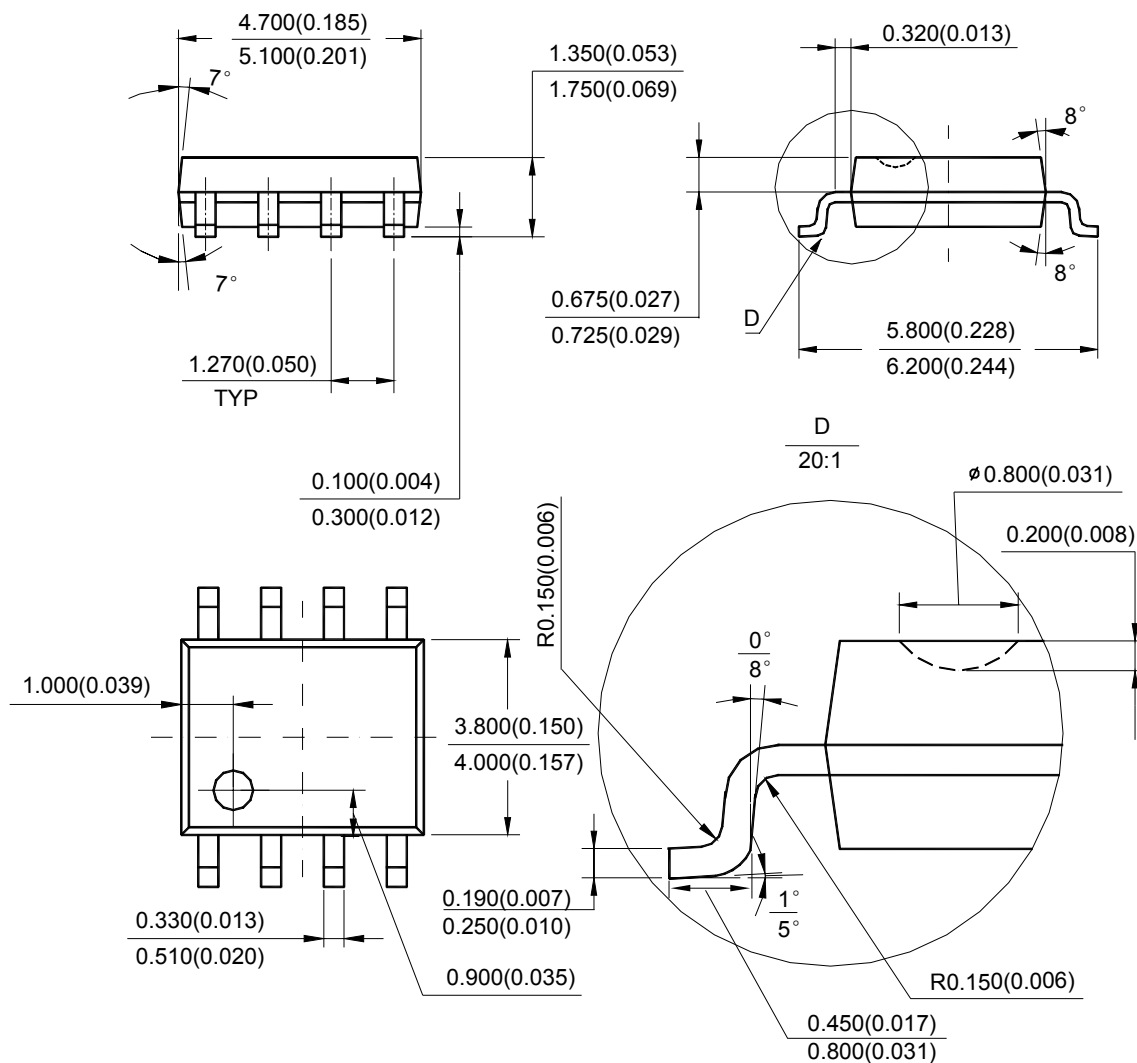



Figure 12. Squarewave Oscillator

**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Mechanical Dimensions****DIP-8****Unit: mm(inch)**


Note: Eject hole, oriented hole and mold mark is optional.

**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Mechanical Dimensions (Continued)****SOIC-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

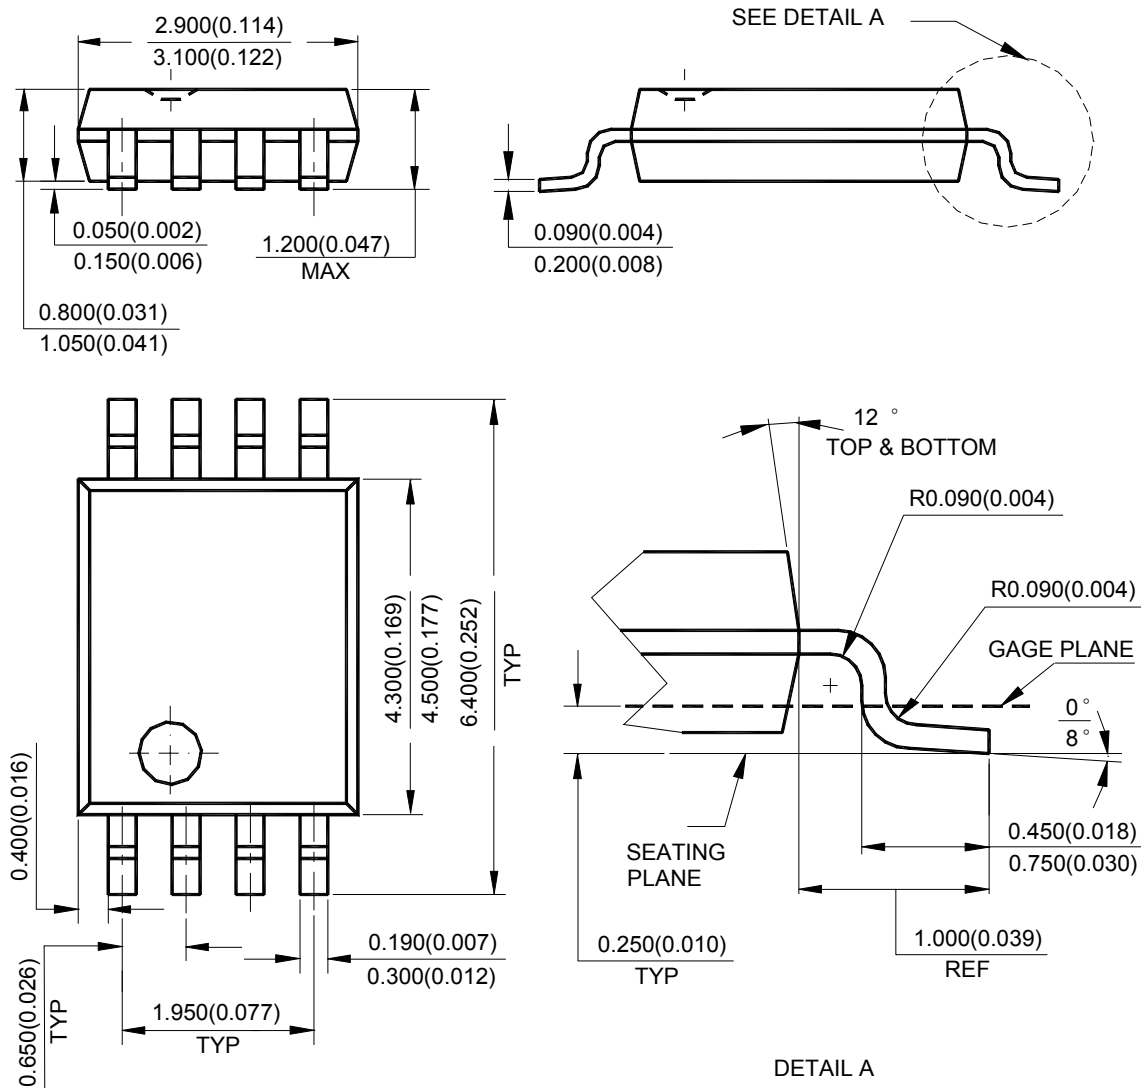**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Mechanical Dimensions (Continued)****TSSOP-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.

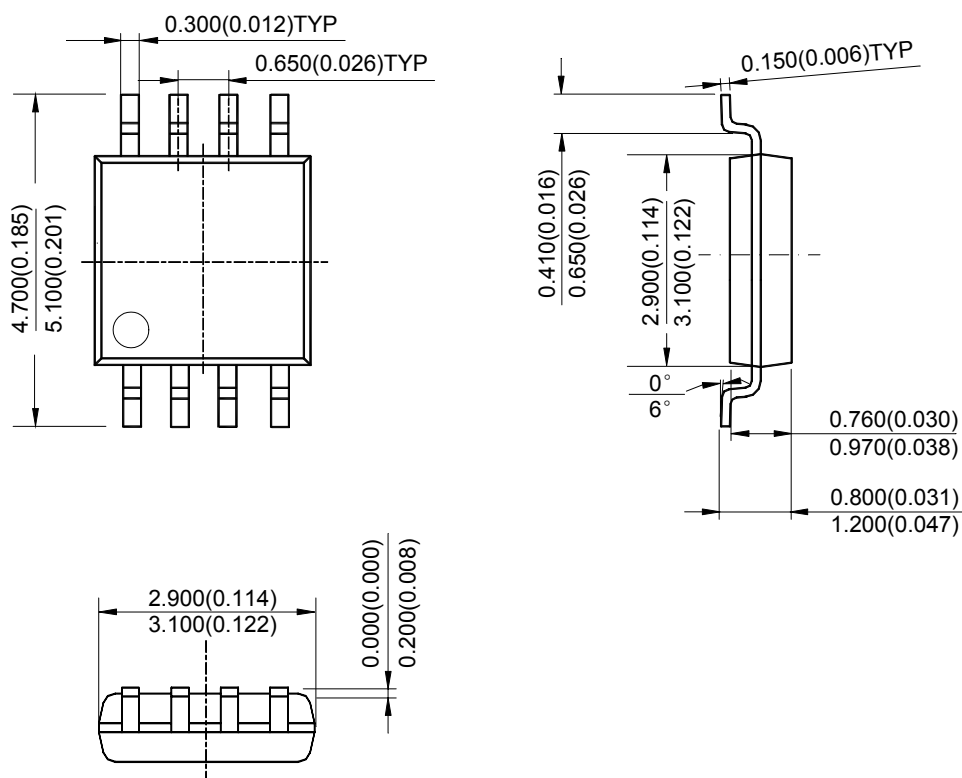**LOW POWER LOW OFFSET VOLTAGE DUAL COMPARATORS****AS393/393A****Mechanical Dimensions (Continued)****MSOP-8****Unit: mm(inch)**

Note: Eject hole, oriented hole and mold mark is optional.



BCD Semiconductor Manufacturing Limited

<http://www.bcdsemi.com>

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

- Headquarters

BCD Semiconductor Manufacturing Limited

No. 1600, Zi Xing Road, Shanghai ZiZhu Science-based Industrial Park, 200241, China
Tel: +86-21-24162266, Fax: +86-21-24162277

- Wafer Fab

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.

800 Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

REGIONAL SALES OFFICE

Shenzhen Office

Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. I.S., Nanshan District, Shenzhen, China
Tel: +86-755-8826 7951
Fax: +86-755-8826 7865

Taiwan Office

BCD Semiconductor (Taiwan) Company Limited

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808
Fax: +886-2-2656 2806

USA Office

BCD Semiconductor Corp.

30920 Huntwood Ave. Hayward, CA 94544, USA
Tel : +1-510-324-2988
Fax: +1-510-324-2788