


ECS-3951C/3953C SMD Clock Oscillator

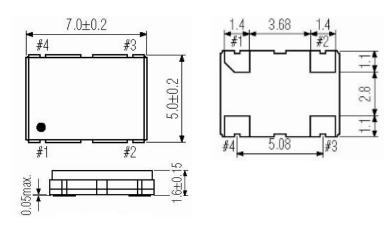

Package Dimensions (mm)






Figure 2) Land Pattern

Figure 1) Top, Side, and Bottom views

Pin Connections		
#1	Tri-State**	
#2	Ground	
#3	Output	
#4	VCC	

Tri-State Control Voltage		
Pad 1	Pad 3	
Open	Oscillation	
VCC x 0.9 Min.	Oscillation	
VCC x 0.1 Max.	No Oscillation	

^{**} Note: Internal pullup resistor from pin 1 to 4 allows active output if pin 1 is left open

ECS-3953C is also compatible with a supply voltage of +3.0V DC ±0.3V