

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part number (Note 1)	Marking code	Nominal Zener voltage	Test current	Zener Impedance			Leakage current		Surge current
		$V_Z @ I_Z$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_R
		V	mA	Ω	Ω	mA	μA	V	mA
		(Note 2) (Note 3)					Max		
1SMA4737	737A	7.5	34	4	700	0.50	5	5.0	605
1SMA4738	738A	8.2	31	4.5	700	0.50	5	6.0	550
1SMA4739	739A	9.1	28	5	700	0.50	5	7.0	500
1SMA4740	740A	10	25	7	700	0.25	5	7.6	454
1SMA4741	741A	11	23	8	700	0.25	1	8.4	414
1SMA4742	742A	12	21	9	700	0.25	1	9.1	380
1SMA4743	743A	13	19	10	700	0.25	1	9.9	344
1SMA4744	744A	15	17	14	700	0.25	1	11.4	304
1SMA4745	745A	16	15.5	16	700	0.25	1	12.2	285
1SMA4746	746A	18	14.0	20	750	0.25	1	13.7	250
1SMA4747	747A	20	12.5	22	750	0.25	1	15.2	225
1SMA4748	748A	22	11.5	23	750	0.25	1	16.7	205
1SMA4749	749A	24	10.5	25	750	0.25	1	18.2	190
1SMA4750	750A	27	9.5	35	750	0.25	1	20.6	170
1SMA4751	751A	30	8.5	40	1000	0.25	1	22.8	150
1SMA4752	752A	33	7.5	45	1000	0.25	1	25.1	135
1SMA4753	753A	36	7.0	50	1000	0.25	1	27.4	125
1SMA4754	754A	39	6.5	60	1000	0.25	1	29.7	115
1SMA4755	755A	43	6.0	70	1500	0.25	1	32.7	110
1SMA4756	756A	47	5.5	80	1500	0.25	1	35.8	95
1SMA4757	757A	51	5.0	95	1500	0.25	1	38.8	90
1SMA4758	758A	56	4.5	110	2000	0.25	1	42.6	80
1SMA4759	759A	62	4.0	125	2000	0.25	1	47.1	70
1SMA4760	760A	68	3.7	150	2000	0.25	1	51.7	65
1SMA4761	761A	75	3.3	175	2000	0.25	1	56.0	60
1SMA4762	762A	82	3.0	200	3000	0.25	1	62.2	55
1SMA4763	763A	91	2.8	250	3000	0.25	1	69.2	50
1SMA4764	764A	100	2.5	350	3000	0.25	1	76.0	45
1SMA110Z	110A	110	2.3	450	4000	0.25	1	83.6	-
1SMA120Z	120A	120	2.0	550	4500	0.25	1	91.2	-
1SMA130Z	130A	130	1.9	700	5000	0.25	1	98.8	-
1SMA150Z	150A	150	1.7	1000	6000	0.25	1	114.0	-
1SMA160Z	160A	160	1.6	1100	6500	0.25	1	121.6	-
1SMA180Z	180A	180	1.4	1200	7000	0.25	1	136.8	-
1SMA200Z	200A	200	1.2	1500	8000	0.25	1	152.0	-

Note:

- Tolerance and Type Number Designation. The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$
- Specials Available Include:
 - Nominal zener voltages between the voltages shown and tighter voltage tolerances
 - Matched sets
- Zener Voltage (V_Z) Measurement. Guarantees the zener voltage when measured at 90 seconds while maintaining the lead temperature (T_L) at $30^\circ\text{C} \pm 1^\circ\text{C}$, from the diode body
- Zener Impedance (Z_Z) Derivation. The zener impedance is derives from the 60 cycle AC voltage, which results when an ac current having and rms value equal to 10% of the DC zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}
- Surge Current (I_R) Non-Repetitive. The rating list in the electrical characteristics table is maximum peak, non-repetitive, reverse surge current of 1/2 square wave or equivalent sine wave pulse of 1/120 second duration superimposed on the test current, I_{ZT} per JEDEC registration; however, actual device capability is as described in Figure 10.

ORDERING INFORMATION

ORDERING CODE (Note 1, 2, 3)	PACKAGE	PACKING
1SMAxxx R3	SMA	1,800 / 7" reel
1SMAxxx R2	SMA	7,500 / 13" reel
1SMAxxx M2	SMA	7,500 / 13" reel
1SMAxxxHR3	SMA	1,800 / 7" reel
1SMAxxxHR2	SMA	7,500 / 13" reel
1SMAxxxHM2	SMA	7,500 / 13" reel
1SMAxxx F3	Folded SMA	1,800 / 7" reel
1SMAxxx F2	Folded SMA	7,500 / 13" reel
1SMAxxx F4	Folded SMA	7,500 / 13" reel
1SMAxxxHF3	Folded SMA	1,800 / 7" reel
1SMAxxxHF2	Folded SMA	7,500 / 13" reel
1SMAxxxHF4	Folded SMA	7,500 / 13" reel
1SMAxxx R3G	SMA	1,800 / 7" reel
1SMAxxx R2G	SMA	7,500 / 13" reel
1SMAxxx M2G	SMA	7,500 / 13" reel
1SMAxxxHR3G	SMA	1,800 / 7" reel
1SMAxxxHR2G	SMA	7,500 / 13" reel
1SMAxxxHM2G	SMA	7,500 / 13" reel
1SMAxxx F3G	Folded SMA	1,800 / 7" reel
1SMAxxx F2G	Folded SMA	7,500 / 13" reel
1SMAxxx F4G	Folded SMA	7,500 / 13" reel
1SMAxxxHF3G	Folded SMA	1,800 / 7" reel
1SMAxxxHF2G	Folded SMA	7,500 / 13" reel
1SMAxxxHF4G	Folded SMA	7,500 / 13" reel

Note :

1. "xxx" defines voltage from 7.5V (1SMA4737) to 200V (1SMA200Z)
2. "H" means AEC-Q101 qualified
3. "G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Power Temperature Derating Curve

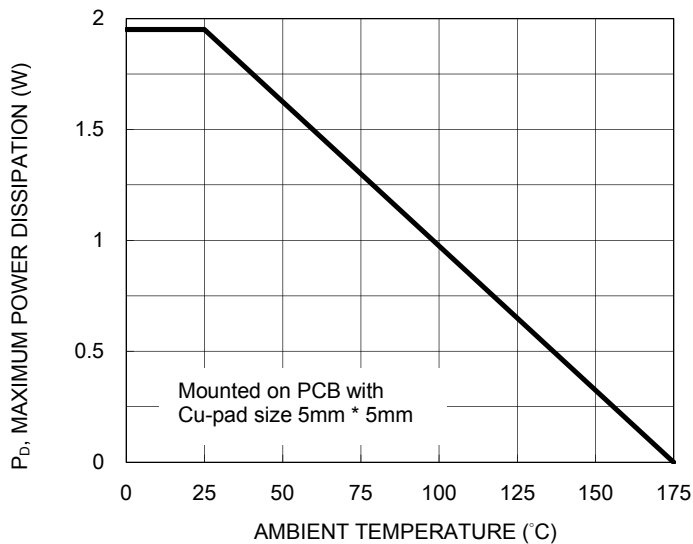


Fig.2 Typical Forward Characteristics

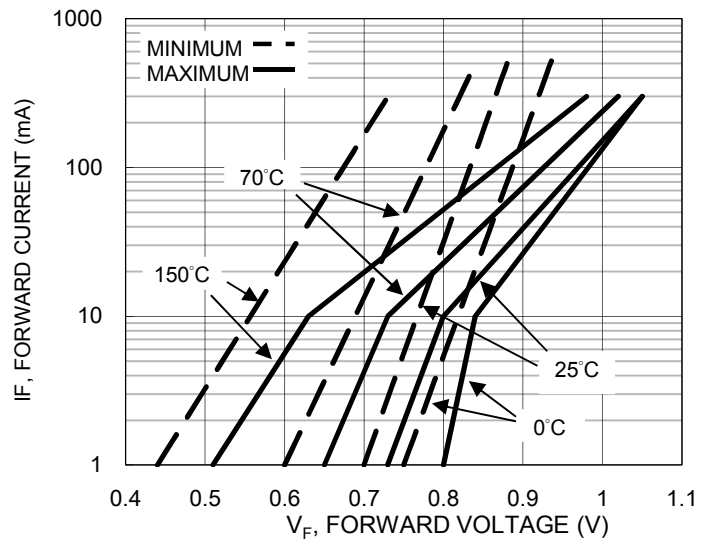


Fig.3 Effect Of Zener Current On Zener Impedance


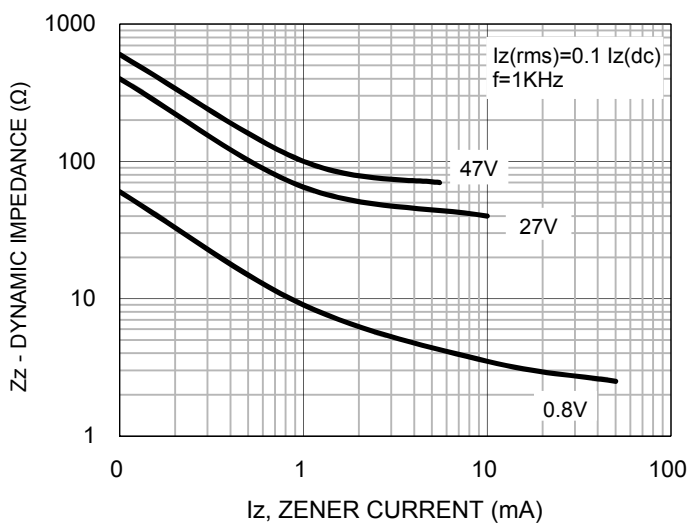


Fig.4 Effect Of Zener Voltage On Zener Impedance

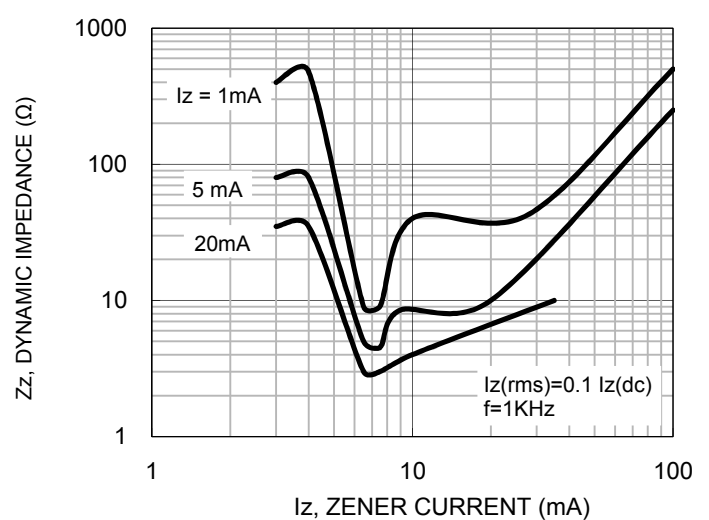

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Typical Capacitance versus V_z

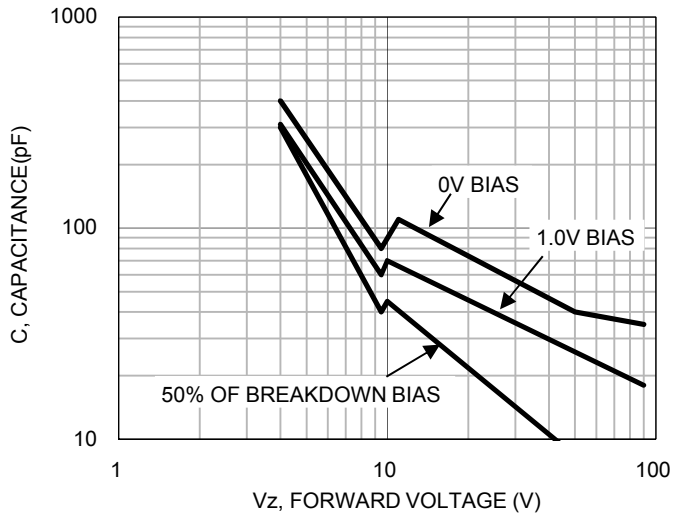


Fig.7 Typical Leakage Current


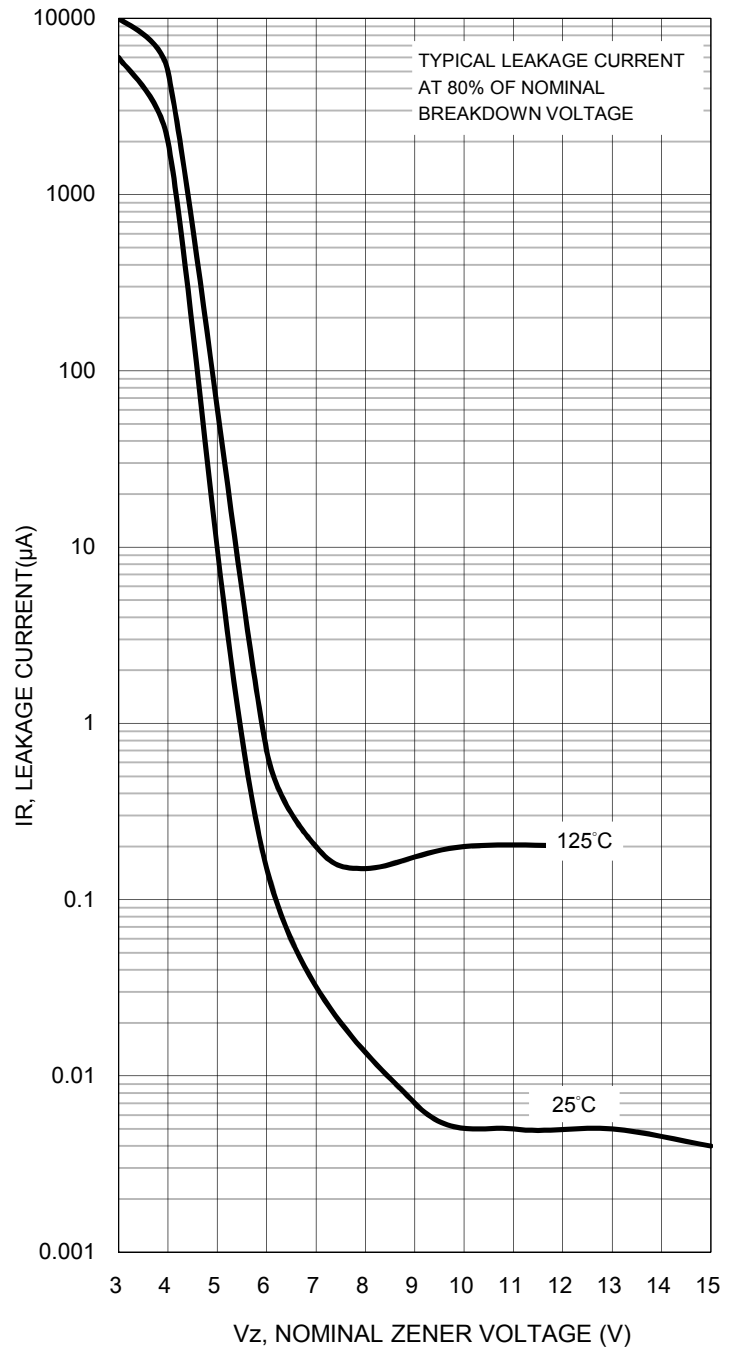


Fig.6 Temperature Coefficients

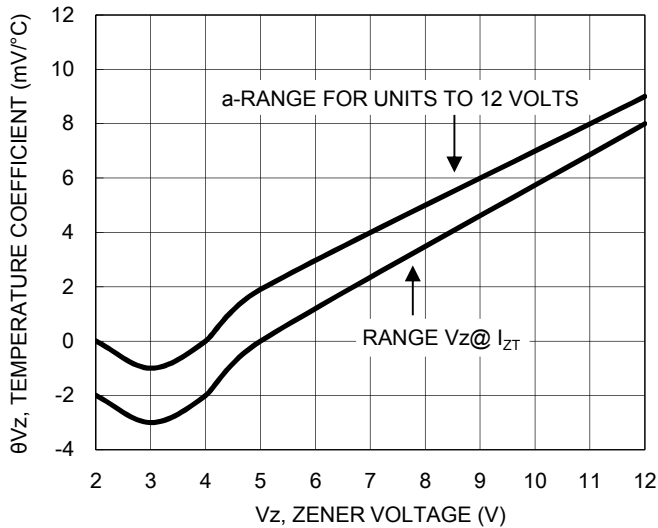

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.8 Temperature Coefficients

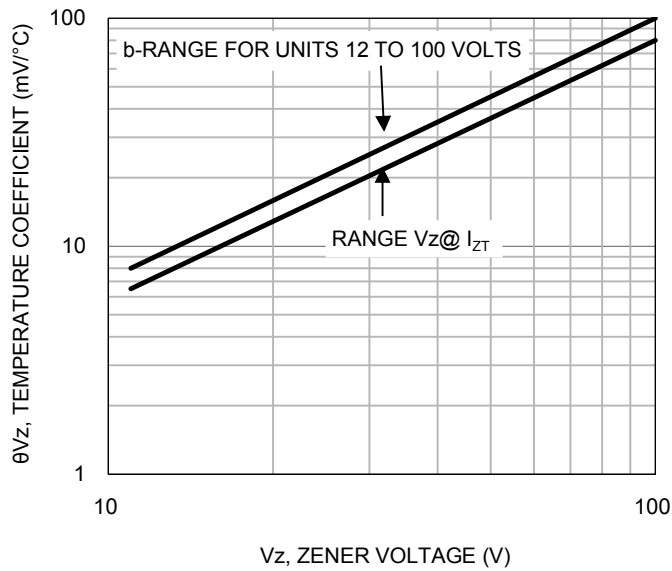


Fig.9 Effect Of Zener Current



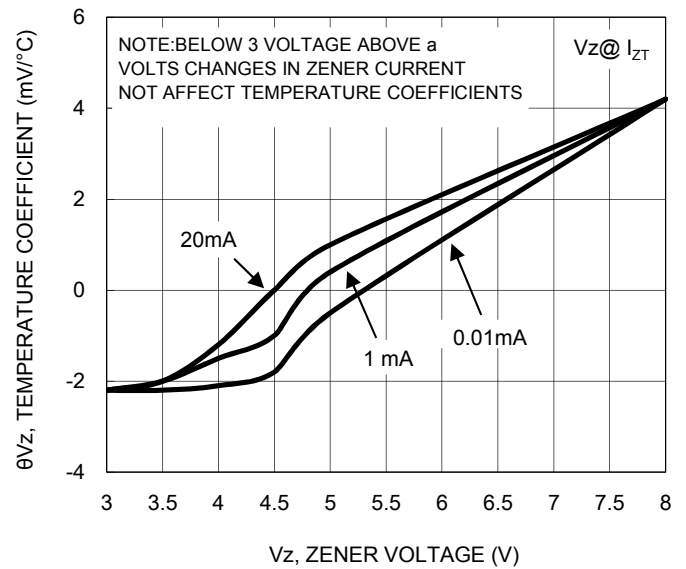


Fig.10 Maximum Surge Power

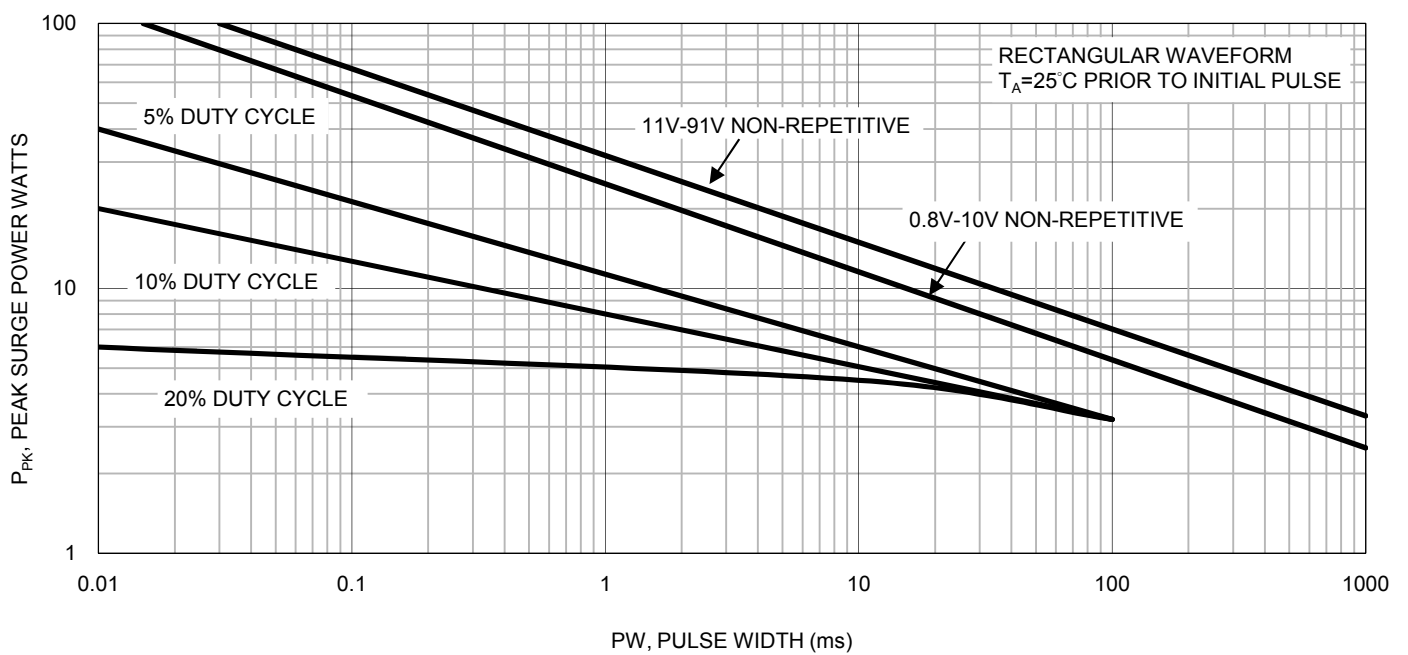


PACKAGE OUTLINE DIMENSIONS

DO-214AC (SMA)

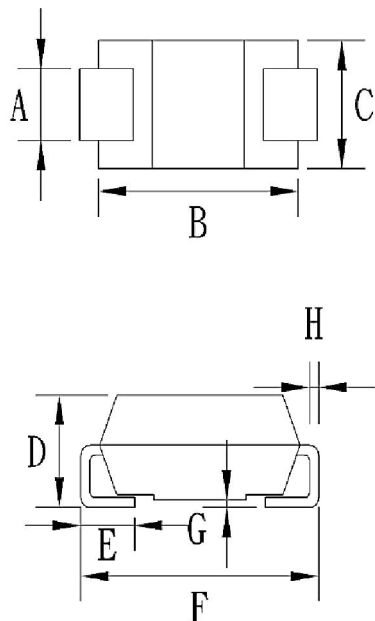

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.27	1.58	0.050	0.062
B	4.06	4.60	0.160	0.181
C	2.29	2.83	0.090	0.111
D	1.99	2.50	0.078	0.098
E	0.90	1.41	0.035	0.056
F	4.95	5.33	0.195	0.210
G	0.10	0.20	0.004	0.008
H	0.15	0.31	0.006	0.012

SUGGESTED PAD LAYOUT

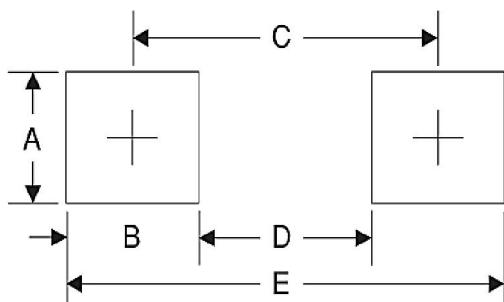

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.93	0.155
D	2.41	0.095
E	5.45	0.215

MARKING DIAGRAM



P/N =Marking Code
 G =Green Compound
 YW =Date Code
 F =Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.