

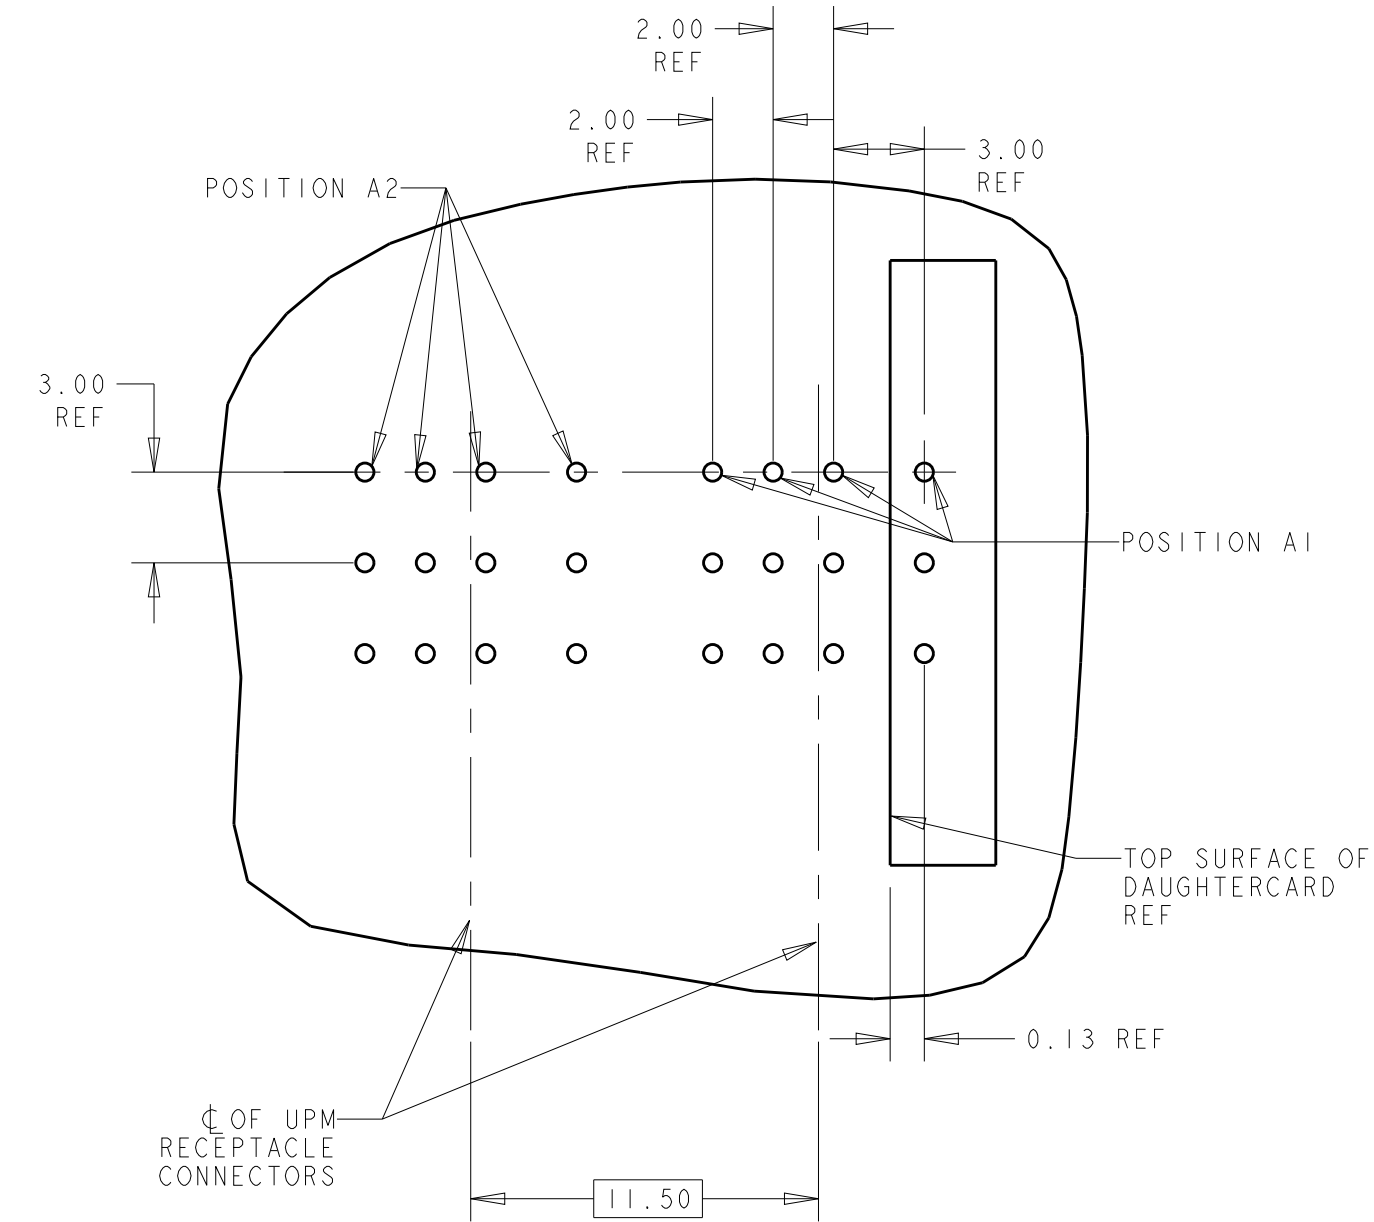
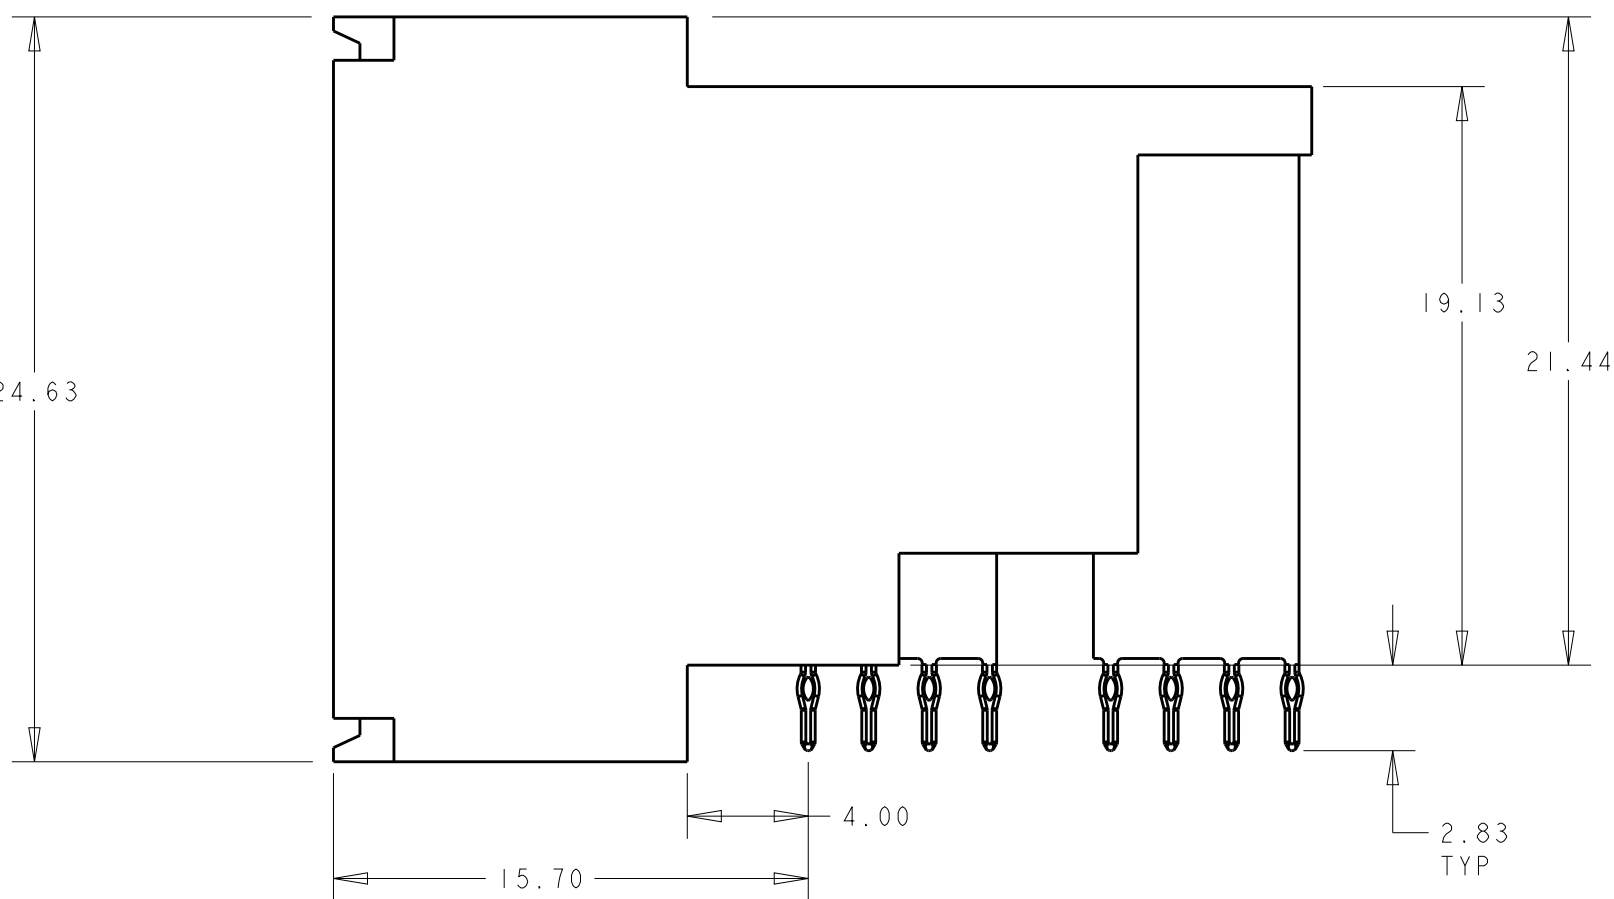


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00		A2	CORRECT DRAFT ERROR	09APR2013	OL	SZ


- 1 MATERIAL: HOUSING: POLYESTER. COLOR: BLACK, UL 94 V-0
CONTACT: COPPER ALLOY.
- 2 FINISH: CONTACT MATING AREA: 0.00076 mm MIN GOLD PLATE
OVER 0.00127 mm MIN NICKEL, OR 0.0005 mm MIN GOLD OVER 0.00064 mm PALLADIUM-NICKEL
OVER 0.00127 mm MIN NICKEL.
COMPLIANT TAIL AREA: 0.0005 mm MIN MATTE TIN PLATE OVER 0.00127 mm
NICKEL UNDERPLATE.
- 3 TAILS OF MATING UPM STYLE RECEPTACLE ARE OFFSET BY 0.75 mm FROM TAILS OF THIS
CONNECTOR. SEE CUSTOMER DRAWING 120992 FOR RECEPTACLE EXAMPLE. SEE APPLICATION
SPEC 114-1103 FOR MORE DETAILED DESCRIPTION OF THE TAIL OFFSETS.
- 4 PC BOARD HOLE SPECIFICATIONS:
DRILLED HOLE SIZE: 0.700±0.02 mm
FINISHED HOLE SIZE: 0.60±0.05 mm
PLATING THICKNESS:
0.025 - 0.050 mm COPPER
0.004 - 0.010 mm HASL TIN
0.0005 mm MIN IMMERSION TIN
0.0002 - 0.0005 mm OSP
0.0001mm MIN IMMERSION SILVER
0.0001-0.0005 mm IMMERSION GOLD OVER 0.004-0.005 mm NICKEL
- 5 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 6 MINIMUM REQUIRED PC BOARD THICKNESS IS 1.44mm.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE
GR-1217-CORE, ISSUE 1 NOVEMBER 1995.
- 8 POSITION A1 IS AT MATERIAL ID.

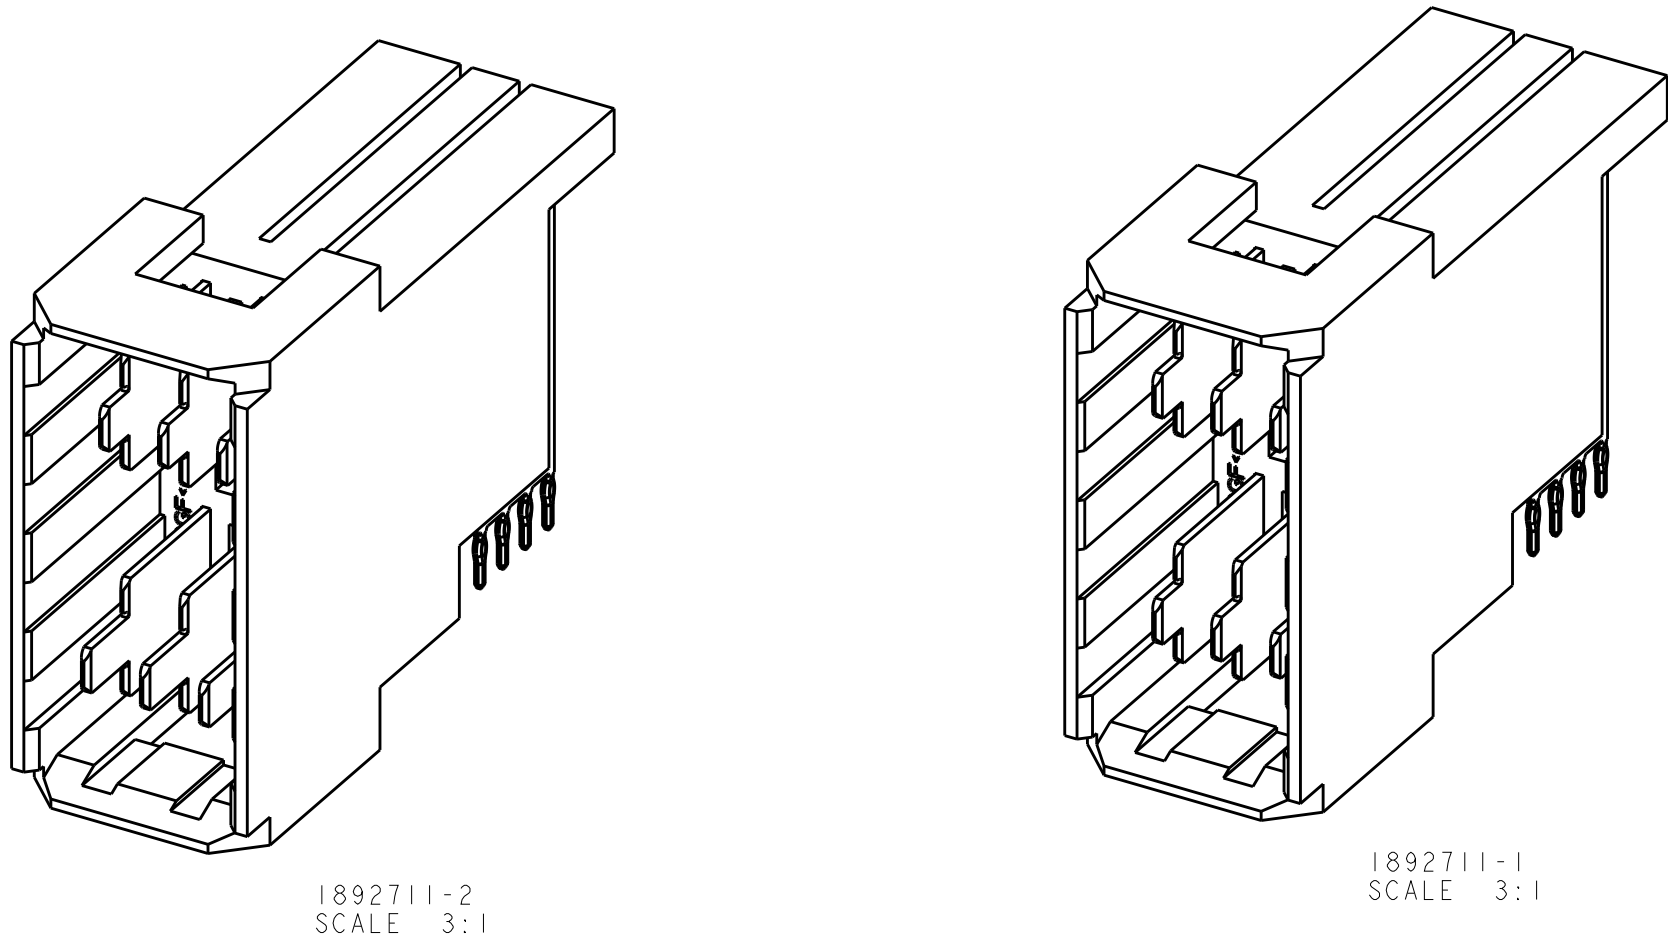

MATING VERTICAL UPM RECEPTACLE PCB LAYOUT 3

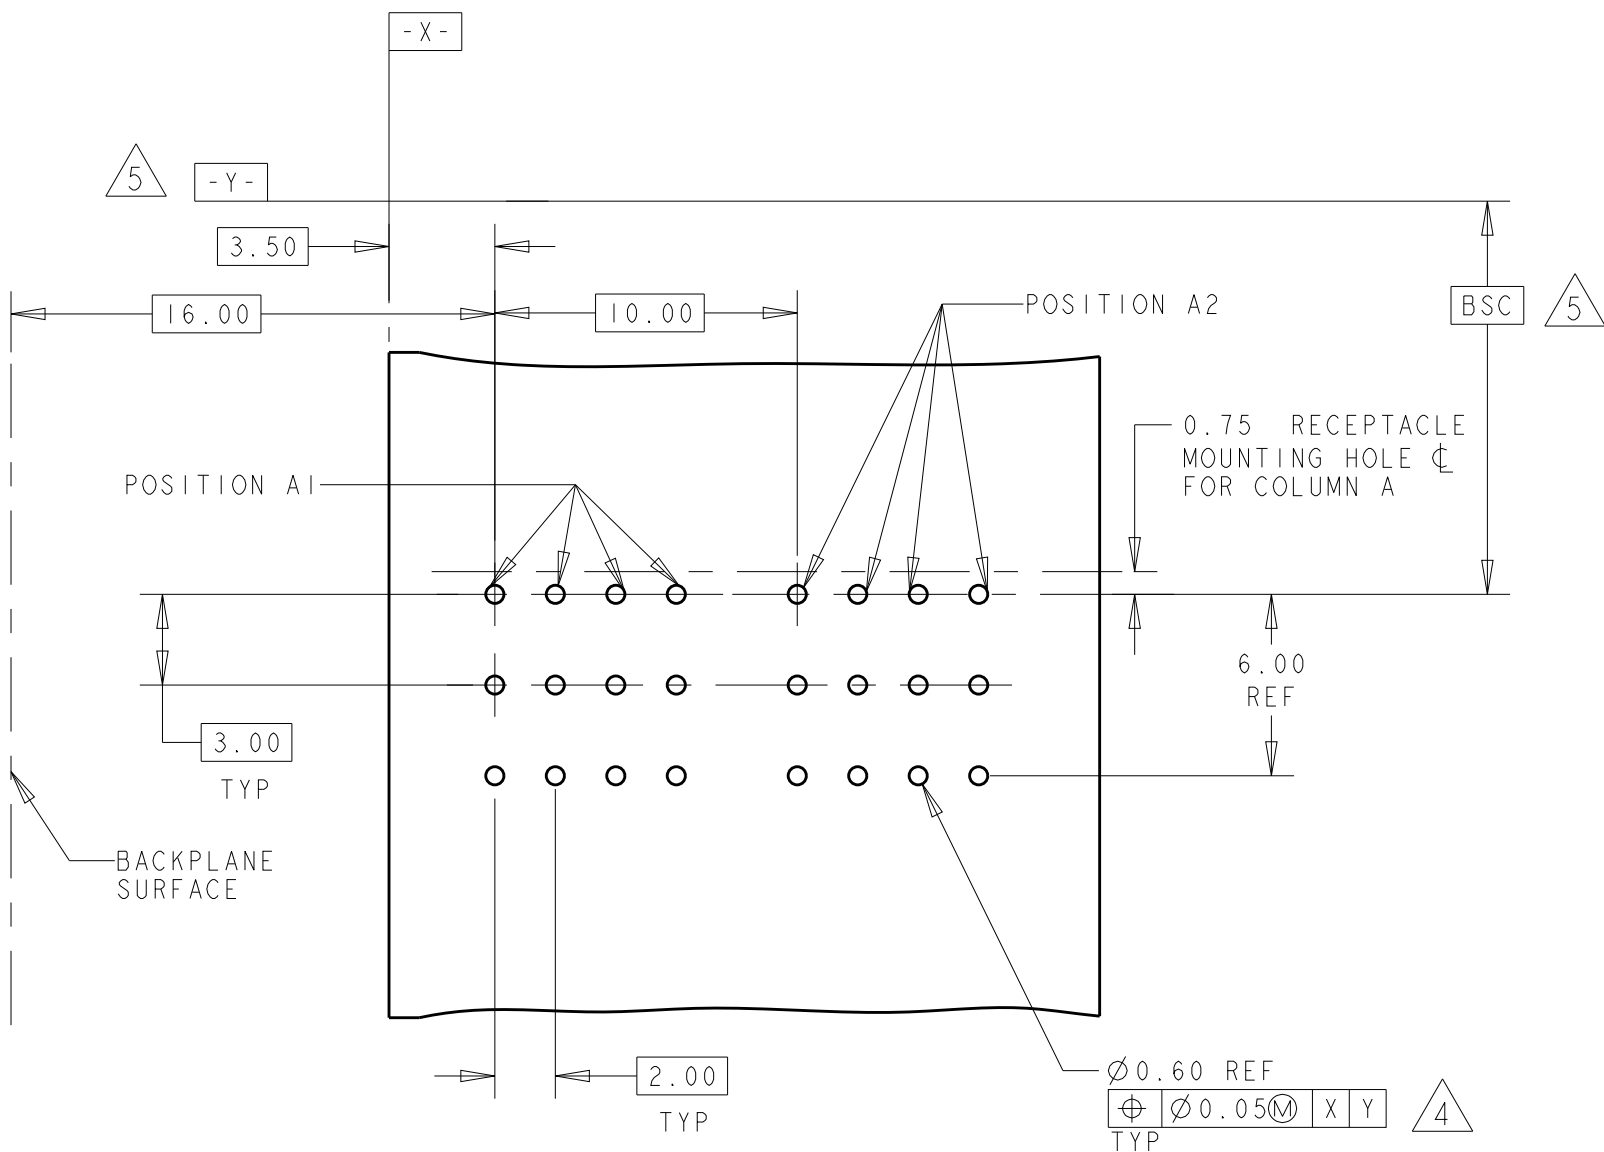

RECOMMENDED PCB LAYOUT 6

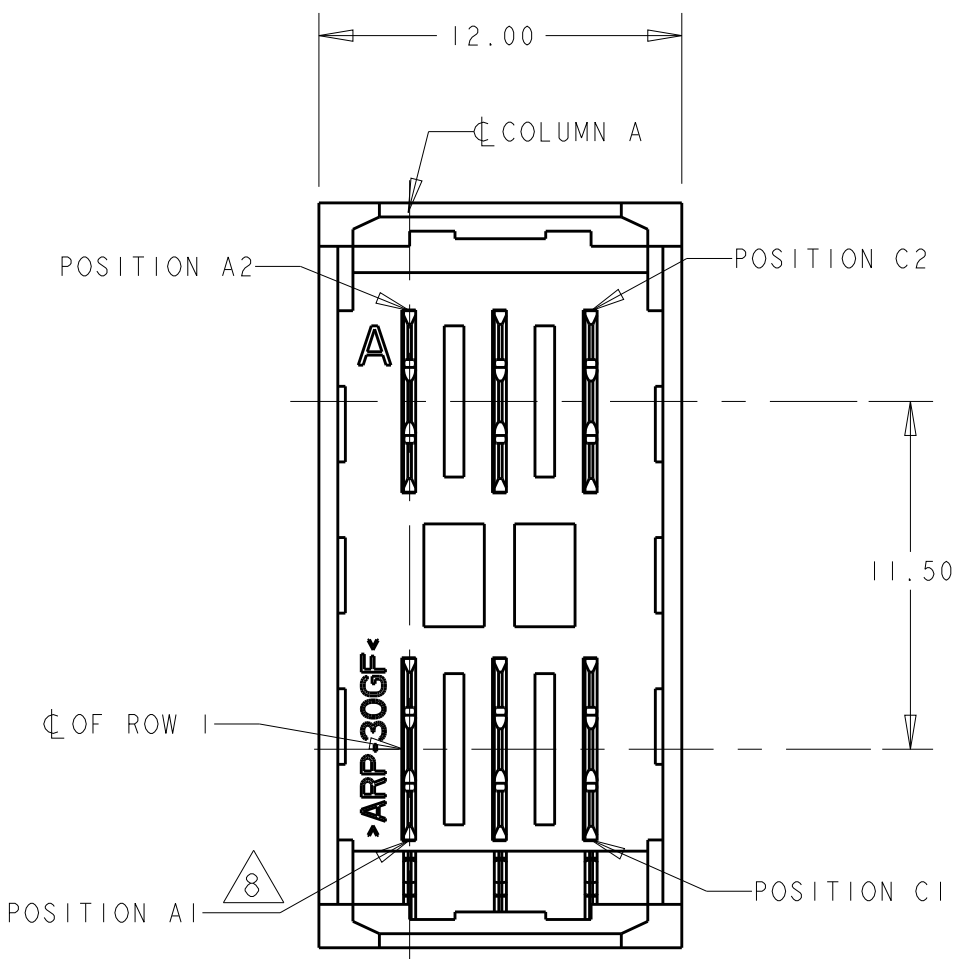

B1	C1	A1,A2,B2,C2	1892711-3
-	A1,B1,C1	A2,B2,C2	1892711-2
-	-	ALL	1892711-1
POSITION LOADED WITH 7.7 REF SHORT PIN		POSITION LOADED WITH 10.92 REF LONG PIN	PART NO
DWN: ORANDO LI 23JUN2009		Tyco Electronics Shanghai, P.R. China. 200233	
CHK: SUNY ZHAO 23JUN2009		NAME: STEVEN YAO 23JUN2009	
APVD: STEVEN YAO 23JUN2009		PRODUCT SPEC: 108-2289	
APPLICATION SPEC: -		SIZE: CAGE CODE: DRAWING NO: A100779C=1892711	
WEIGHT: -		RESTRICTED TO: -	
Customer Drawing		SCALE: 5:1 SHEET 1 OF 1 REV: A2	

DIMENSIONS:	
mm	
	0 PLC ±.25
	1 PLC ±.25
	2 PLC ±.25
	3 PLC ±.25
	4 PLC ±.25
	ANGLES ±1°
	FINISH 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC ±.25	
1 PLC ±.25	
2 PLC ±.25	
3 PLC ±.25	
4 PLC ±.25	
ANGLES ±1°	
FINISH 2	