
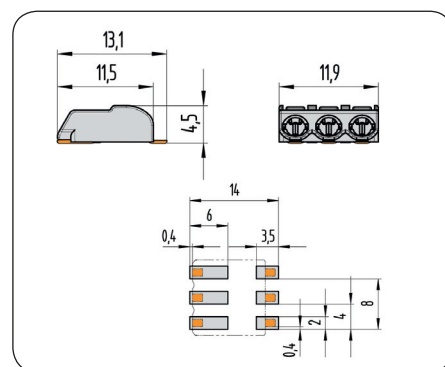
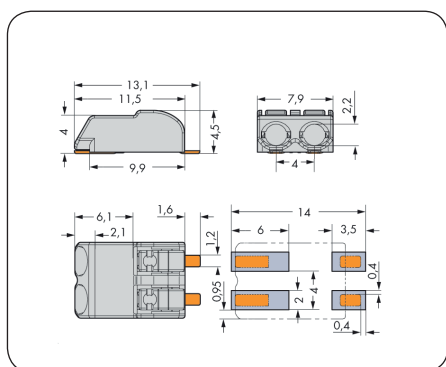
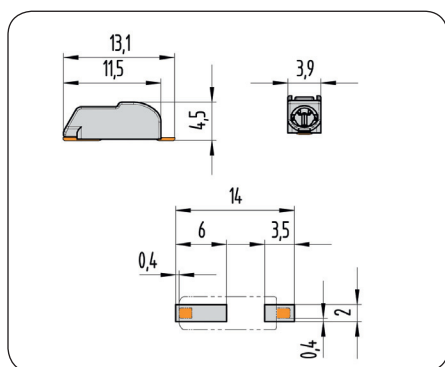





SMD Terminal Strips with Push-Buttons 2060 Series

Pin spacing 4 mm / 0.157 in		Pin spacing 4 mm / 0.157 in		Pin spacing 4 mm / 0.157 in	
0.2 - 0.75 mm ²	AWG 24 - 18	0.2 - 0.75 mm ²	AWG 24 - 18	0.2 - 0.75 mm ²	AWG 24 - 18
160 V/2.5 kV/2 9 A	600 V/9 A	160 V/2.5 kV/2 9 A	250 V/9 A	160 V/2.5 kV/2 9 A	250 V/9 A



Pole No.	Item No.	Pack Unit/ Pieces per Reel	Pole No.	Item No.	Pack Unit/ Pieces per Reel	Pole No.	Item No.	Pack Unit/ Pieces per Reel
SMD terminal strip with push-buttons in tape-and-reel packaging, light gray*			SMD terminal strip with push-buttons in tape-and-reel packaging, light gray*			SMD terminal strip with push-buttons in tape-and-reel packaging, light gray*		
1	2060-401/998-404	1500	2	2060-402/998-404	1000	3	2060-403/998-404	750
Reel diameter: 330 mm			Reel diameter: 330 mm			Reel diameter: 330 mm		

*Depending on reflow soldering temperatures and times, color deviations may occur for light gray connectors. These deviations will have no impact on functionality.

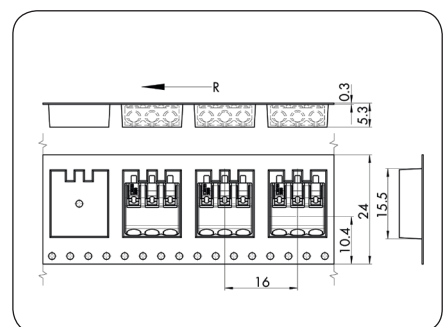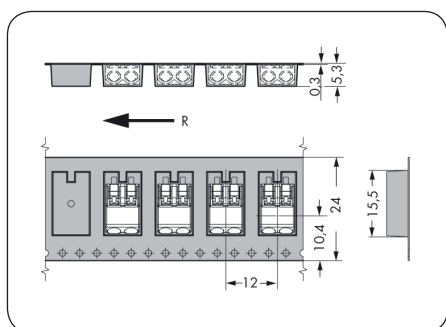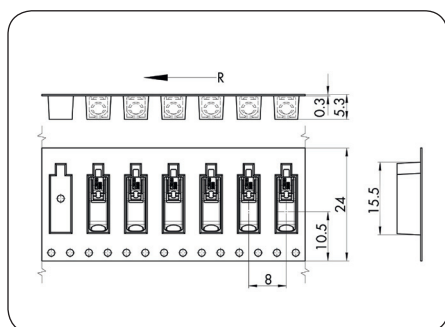

R = Feed Direction