


DATA SHEET

SPECIFICATIONS: USB-C to DisplayPort Adapter Cable 4K30

SPECIFICATIONS:

- UL2725 (7/0.08*1P+D+AL+MY)*5C+7/0.08*4C+7/0.16*2C+AB16/9/0.08T,OD=ø4.7±0.2mm, Jacket: PVC - Black
- Chipset: CH7213A
- Operating Temperature: 0 ~ 50°C
- Storage Temperature: -25 ~ 70°C
- P1: USB Type-C Male: Solder Type, Gold Flash Contact, Front Shell Nickel-Plated, Insulation: Black
- P2: DisplayPort 20P Male: Solder Type, Gold Flash Contacts, Front Shell Nickel-Plated, Insulation: Black
- Product is CE Marked and Conforms to 2011/65/EU RoHS2

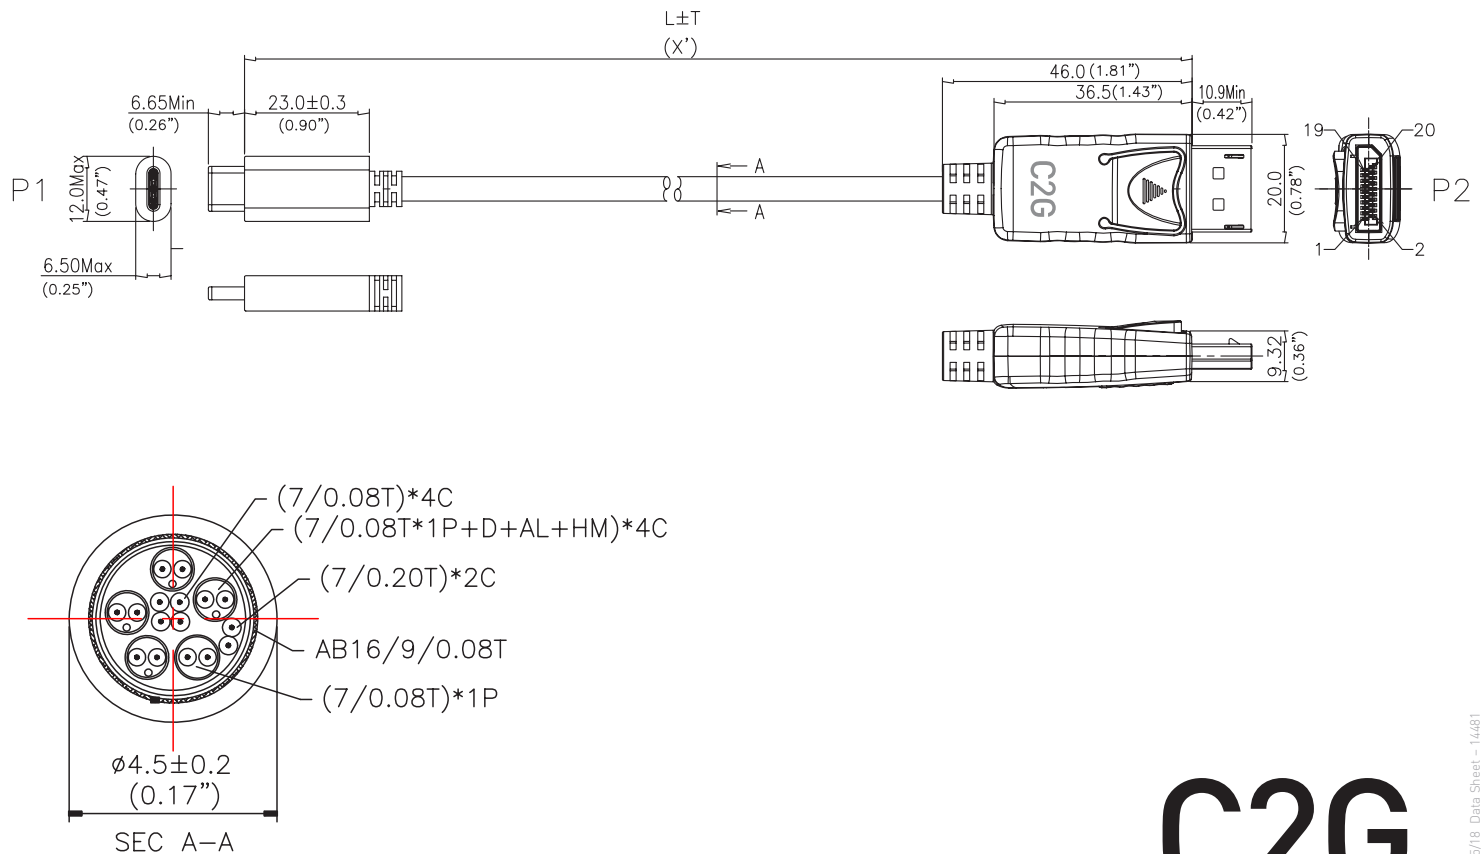

C2G
A brand of **legrand**

3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.CABL.911
www.c2g.com

Follow Us

