


### Temperature Re-rating Curve

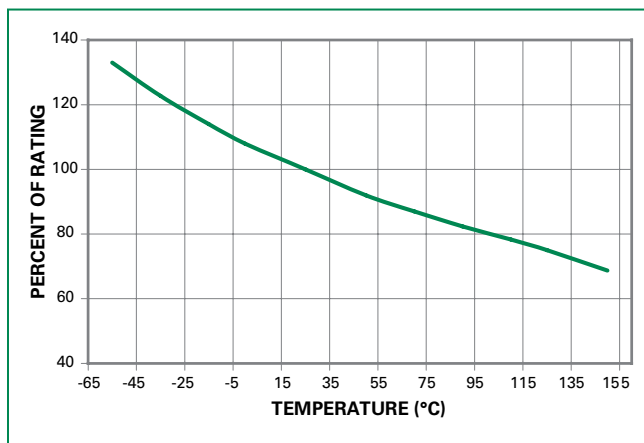

Note:


1. Re-rating depicted in this curve is in addition to the standard re-rating of 20% for continuous operation.

Example:

For continuous operation at 75 degrees celsius, the fuse should be rated as follows:


$$I = (0.80)(0.85)I_{RAT} = (0.68)I_{RAT}$$

### Average Time Current Curves

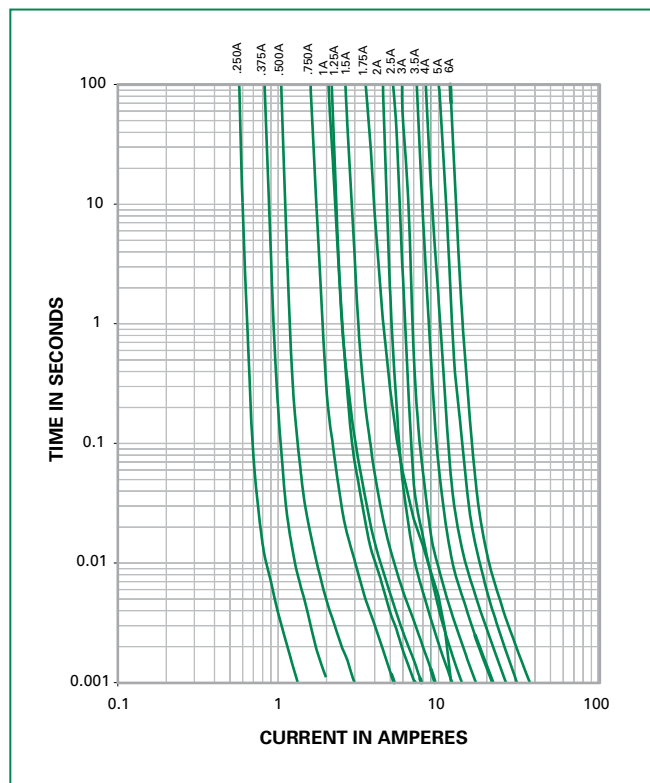

### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{S(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{S(max)}$ ) | 200°C                   |
|                                                        | - Time (Min to Max) ( $t_s$ )      | 60 – 180 seconds        |
| Average Ramp-up Rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max.         |
| $T_{S(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max.         |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_P$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 10 – 30 seconds         |
| Ramp-down Rate                                         |                                    | 6°C/second max.         |
| Time 25°C to peak Temperature ( $T_P$ )                |                                    | 8 minutes max.          |
| Do not exceed                                          |                                    | 260°C                   |

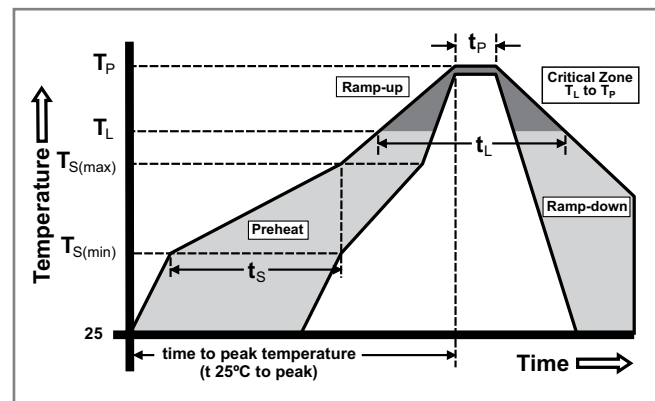

Wave Soldering


260°C, 10 seconds max.

### Product Characteristics

|                                   |                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>Materials</b>                  | <b>Body:</b> Advanced Ceramic<br><b>Terminations:</b> Ag / Ni / Sn (100% Lead-free)<br><b>Element Cover Coating:</b> Lead-free Glass |
| <b>Moisture Sensitivity Level</b> | IPC/JEDEC J-STD-020, Level 1                                                                                                         |
| <b>Solderability</b>              | IPC/EIC/JEDEC J-STD-002, Condition B                                                                                                 |
| <b>Humidity</b>                   | MIL-STD-202, Method 103, Conditions D                                                                                                |
| <b>Resistance to Solder Heat</b>  | MIL-STD-202, Method 210, Condition B                                                                                                 |

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| <b>Moisture Resistance</b>          | MIL-STD-202, Method 106                |
| <b>Thermal Shock</b>                | MIL-STD-202, Method 107, Condition B-3 |
| <b>Mechanical Shock</b>             | MIL-STD-202, Method 213, Condition A   |
| <b>Vibration</b>                    | MIL-STD-202, Method 201                |
| <b>Vibration, High Frequency</b>    | MIL-STD-202, Method 204, Condition D   |
| <b>Dissolution of Metallization</b> | IPC/EIC/JEDEC J-STD-002, Condition D   |
| <b>Terminal Strength</b>            | IEC 60127-4                            |


### Dimensions

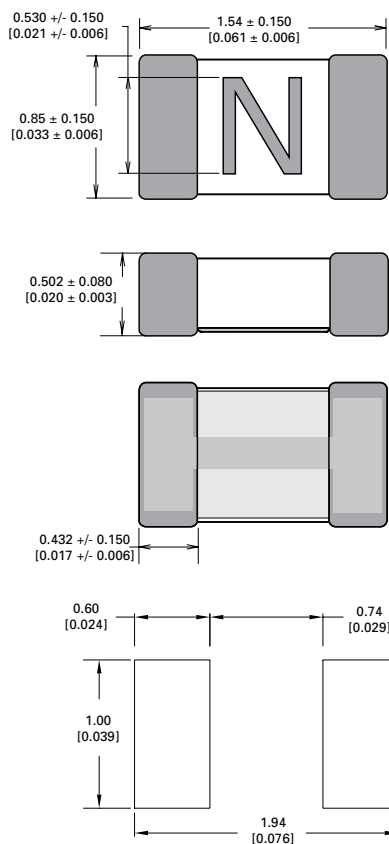

### Part Marking System

| Amp Code | Marking Code | Amp Code | Marking Code |
|----------|--------------|----------|--------------|
| .250     | <b>D</b>     | 002.     | <b>N</b>     |
| .375     | <b>E</b>     | 02.5     | <b>O</b>     |
| .500     | <b>F</b>     | 003.     | <b>P</b>     |
| .750     | <b>G</b>     | 03.5     | <b>R</b>     |
| 001.     | <b>H</b>     | 004.     | <b>S</b>     |
| 1.25     | <b>J</b>     | 005.     | <b>T</b>     |
| 01.5     | <b>K</b>     | 006.     | <b>U</b>     |
| 1.75     | <b>L</b>     |          |              |

### Part Numbering System

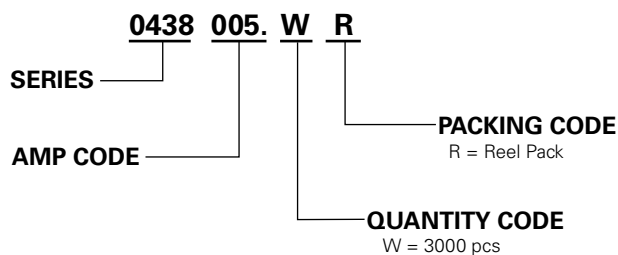

### Packaging

| Packaging Option  | Packaging Specification    | Quantity | Quantity & Packaging Code |
|-------------------|----------------------------|----------|---------------------------|
| 8mm Tape and Reel | EIA-481, IEC 60286, Part 3 | 3000     | WR                        |

**Disclaimer Notice -** Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).