

Rating and Characteristic Curves (1N5400-G Thru. 1N5408-G)

Fig.1 - Derating Curve Output Rectified Current

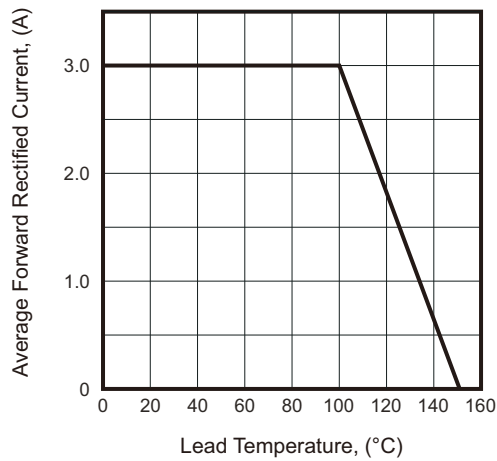


Fig.2 - Max. Non-Repetitive Peak Forward Surge Current Per Leg

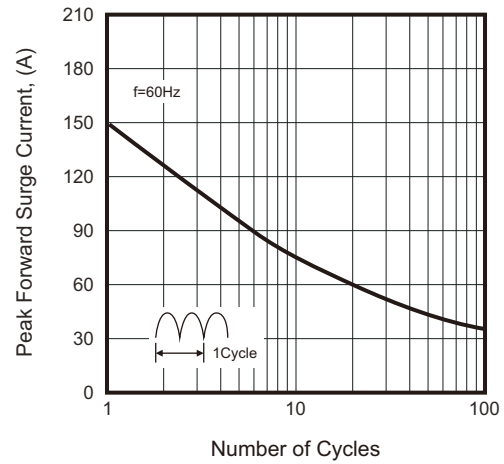


Fig.3 - Typical Forward Voltage Characteristics





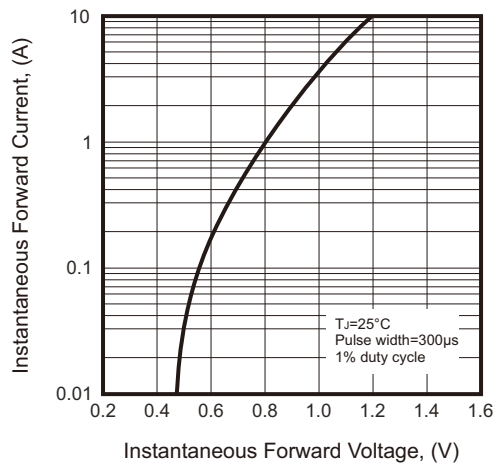


Fig.4 - Typical Reverse Leakage Characteristics

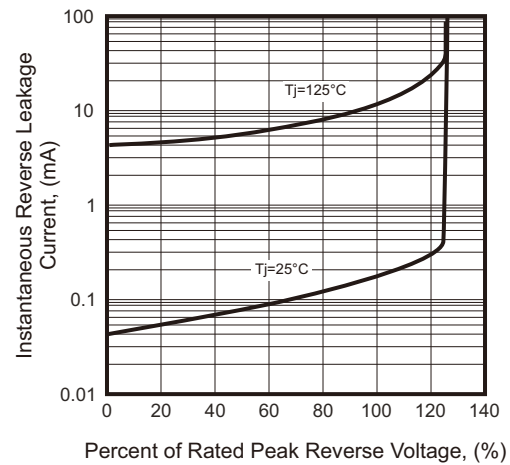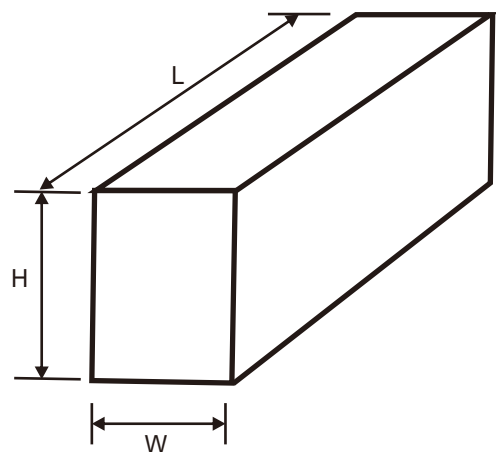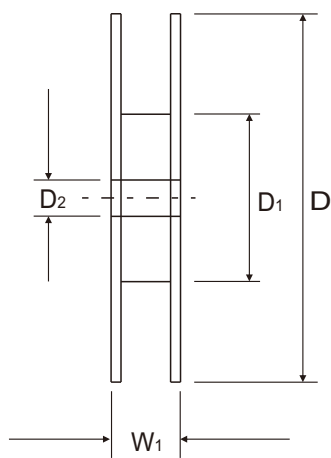

Taping Specification For Axial Lead Diodes

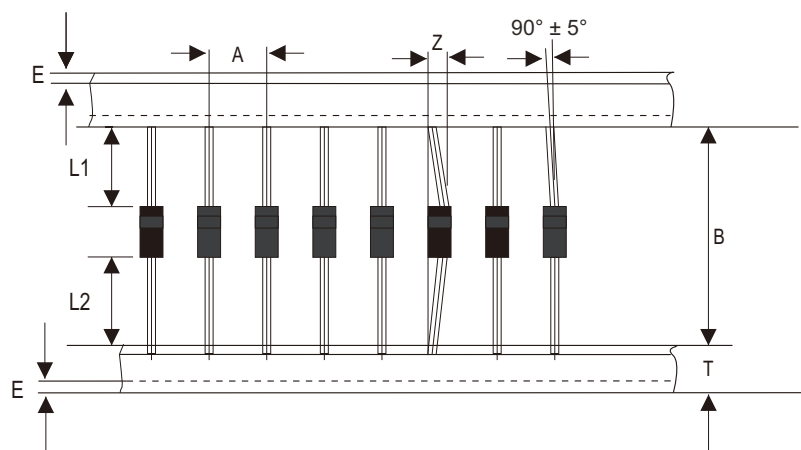

DO-27	SYMBOL	A	B	Z	T	E	L1-L2
	(mm)	10.00 ± 0.50	52.40 + 1.50 - 0.40	1.20 (max)	6.00 ± 0.40	0.80 (max)	1.00 (max)
	(inch)	0.394 ± 0.020	2.063 + 0.059 - 0.016	0.047 (max)	0.236 ± 0.016	0.031 (max)	0.039 (max)

DO-27	SYMBOL	L	W	H	D	D1	D2	W1
	(mm)	255.00 ± 5.00	75.00 ± 5.00	150.00 ± 5.00	330	85.70 ± 0.30	16.60 ± 0.40	79.00 ± 1.00
	(inch)	10.039 ± 0.197	2.953 ± 0.197	5.906 ± 0.197	12.992	3.374 ± 0.012	0.654 ± 0.016	3.110 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

Marking Code

Part Number	Marking code	Packaging
1N5400-G	1N5400	AMMO
1N5401-G	1N5401	
1N5402-G	1N5402	
1N5404-G	1N5404	
1N5406-G	1N5406	
1N5407-G	1N5407	
1N5408-G	1N5408	
1N5400T-G	1N5400	REEL
1N5401T-G	1N5401	
1N5402T-G	1N5402	
1N5404T-G	1N5404	
1N5406T-G	1N5406	
1N5407T-G	1N5407	
1N5408T-G	1N5408	
1N5400B-G	1N5400	BULK
1N5401B-G	1N5401	
1N5402B-G	1N5402	
1N5404B-G	1N5404	
1N5406B-G	1N5406	
1N5407B-G	1N5407	
1N5408B-G	1N5408	



XX = Product type marking code

Note:

1) Suffix code after part number to specify packaging item .

Packaging	Code
AMMO PACK	NA
REEL PACK	T
BULK PACK	B

Standard Packaging

Case Type	AMMO PACK
	BOX (pcs)
DO-27	1,200

Case Type	BULK PACK
	BOX (pcs)
DO-27	200

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
DO-27	1,200	13

Company reserves the right to improve product design , functions and reliability without notice.

REV:C