

Short

Short body external thread banana plugs. Brass body, beryllium copper spring, nickel plated.


Supplied with lug and nut.

460: 4-40x3/8

461: 4-40x1/2

462: 6-32x3/8

463: 6-32x1/2

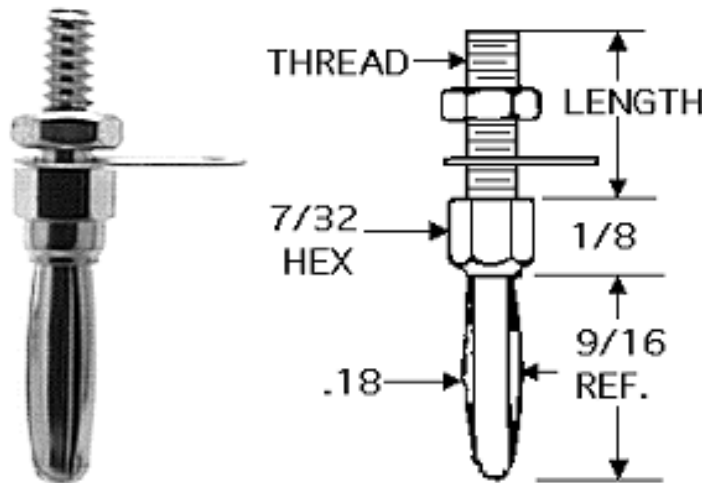

Standard

Standard body, external threaded stud, banana plugs. Brass body, beryllium copper spring, nickel plated.

Supplied with lug and nut.

Rated at 15 Amps AC.

401: 6-32x3/8


103: 6-32x1/2

404: 6-32x3/4

405: 8-32x3/8

406: 8-32x1/2

407: 8-32x3/4

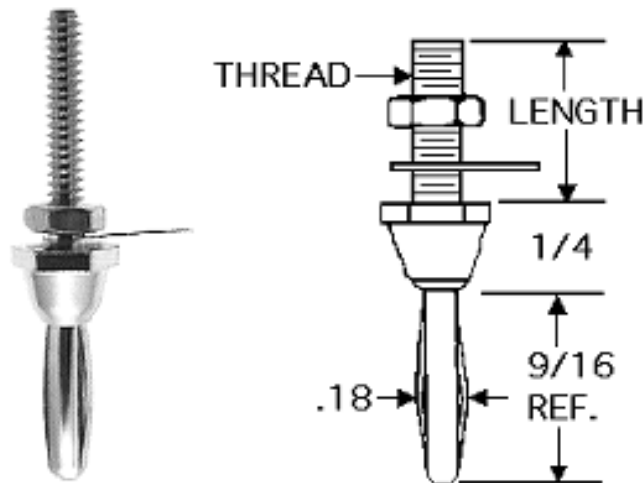

Standard

Standard body, external threaded stud, banana plugs. Brass body, beryllium copper spring, nickel plated.

Supplied with lug and nut.

Rated at 15 Amps AC.

102: 6-32x3/8


432: 6-32x1/2

433: 6-32x3/4

434: 8-32x3/8

435: 8-32x1/2

436: 8-32x3/4

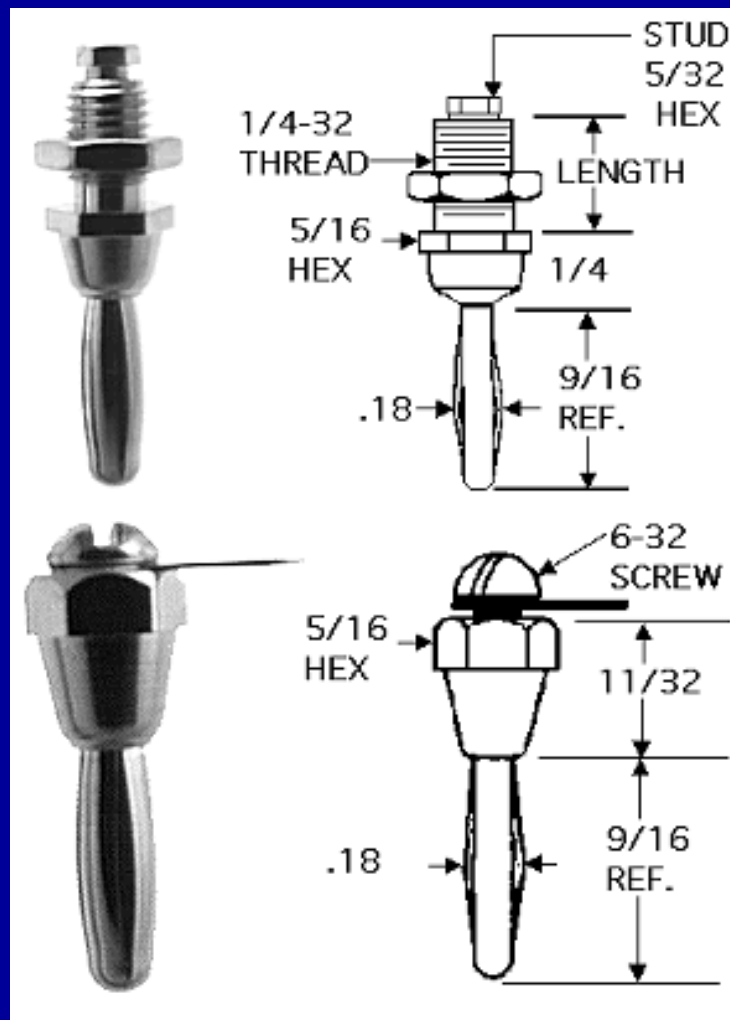

145

Standard banana plug. Brass body, beryllium copper spring, nickel plated.

Supplied with threaded stud and nut.

Rated at 15 Amps AC.

100

Standard body internal thread banana plug. Brass body, beryllium copper spring, nickel plated.

Supplied with lug and 6-32 screw.

Rated at 15 Amps AC.