
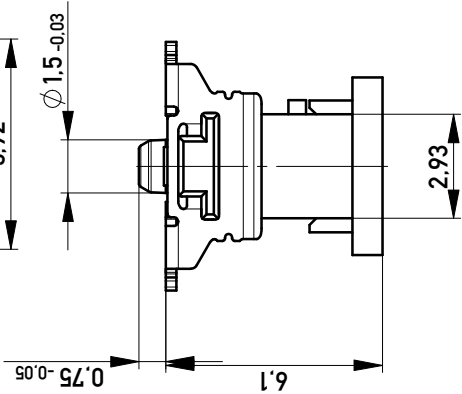
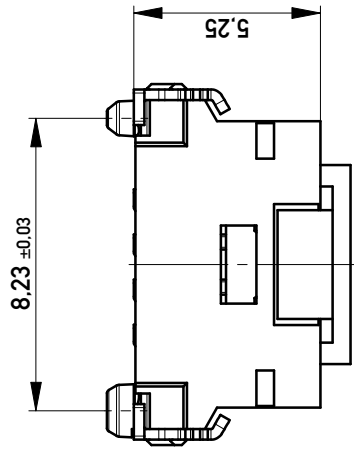
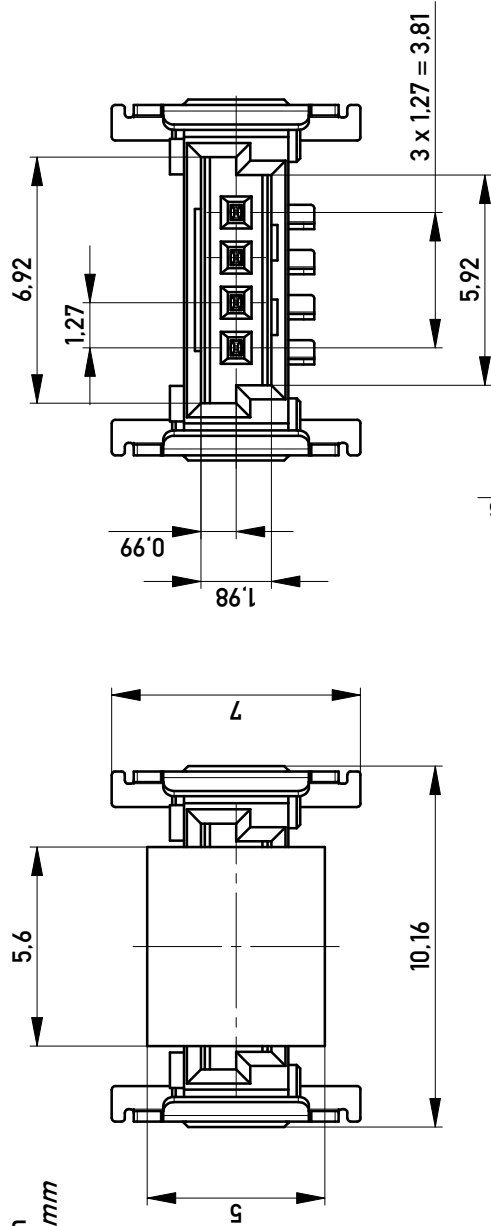


Anforderungsstufe 1
Performance Level 1


Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating





Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

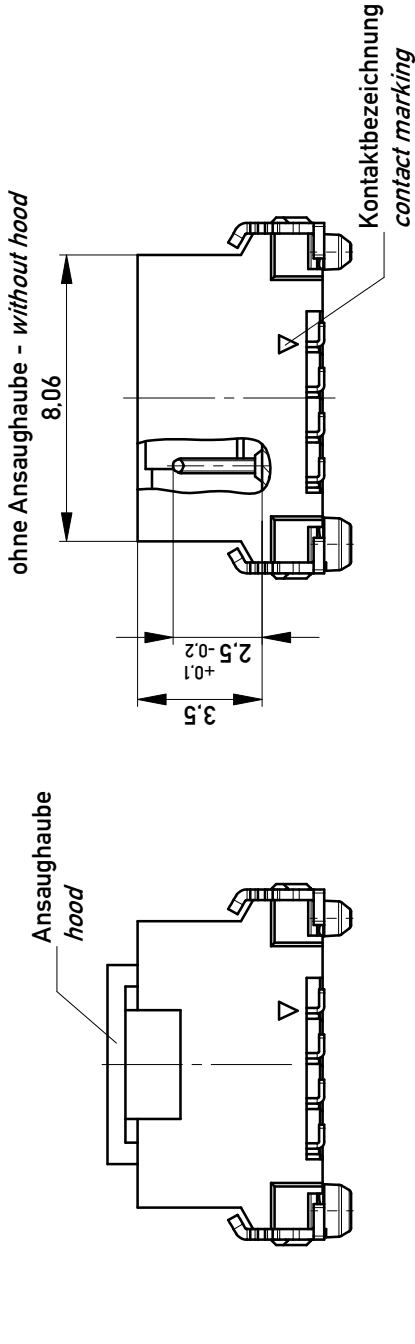


Leiterplatten-Layout für SMT PCB-Layout for SMT

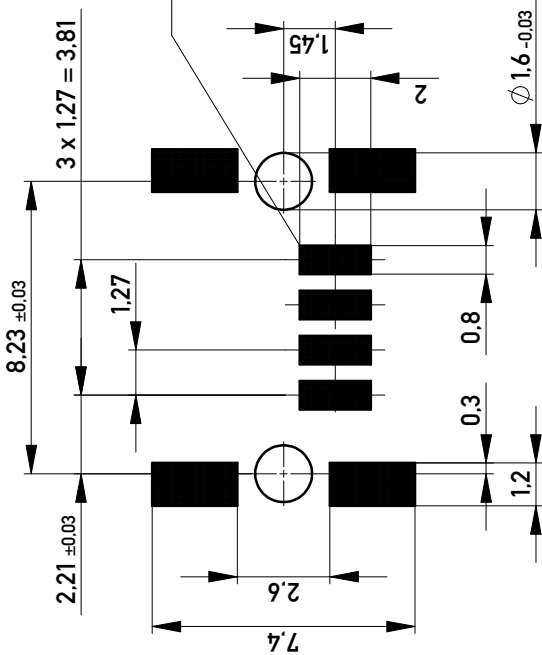


ohne Ansaughaube - without hood

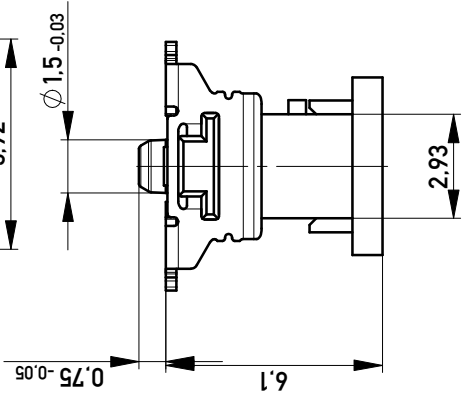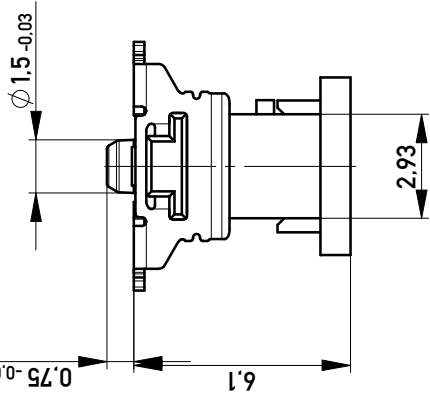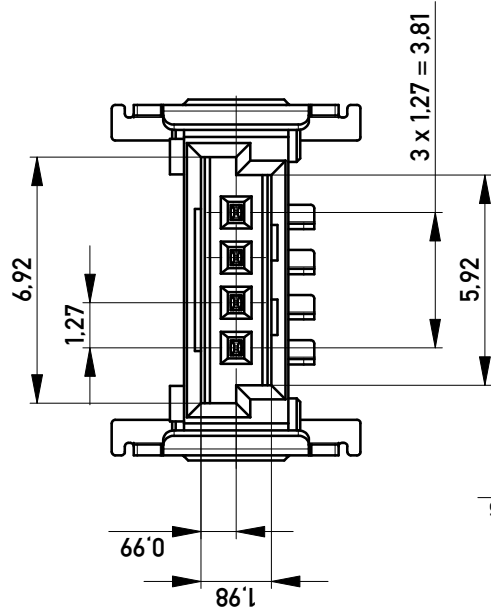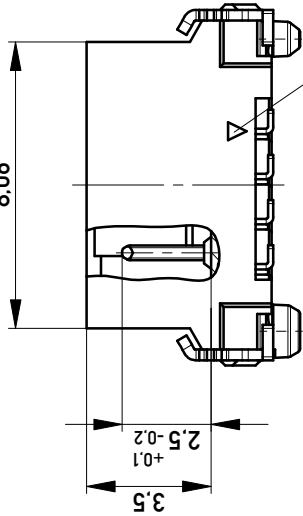

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 650 Stück
packaging unit: 650 pcs

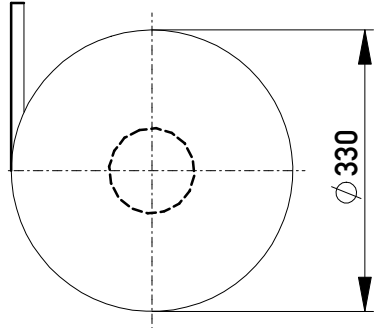

Abspulrichtung - Reel off Direction

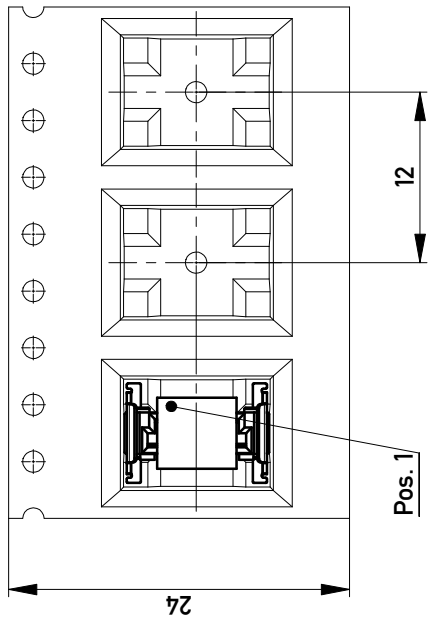

vergrößerte Löt pads enlarged solder pads		Scale 5:1		Tolerances		All Dimensions in mm		Designation		M 1,27 SRC P, 4-polig BA1 M 1,27 SRC P, 4-pin		www.ERNI.com		284697		SRCP	
Information:		Subject to modification without prior notice. Drawing will not be updated.		All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		e		29.08.2018		Date		Index		A3		Class	

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.