

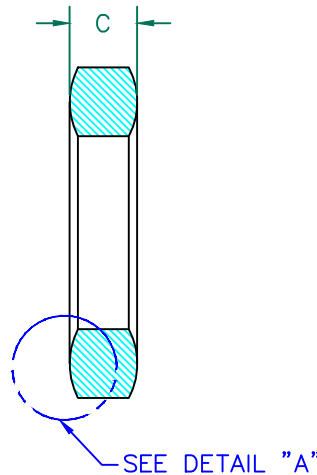


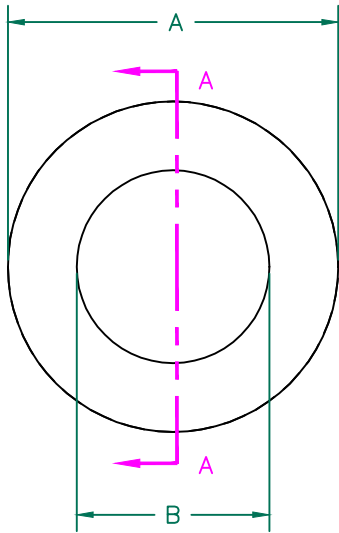


SECTION A-A

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	60 Ω	135 Ω	285 Ω
Minimum	- Ω	108 Ω	- Ω

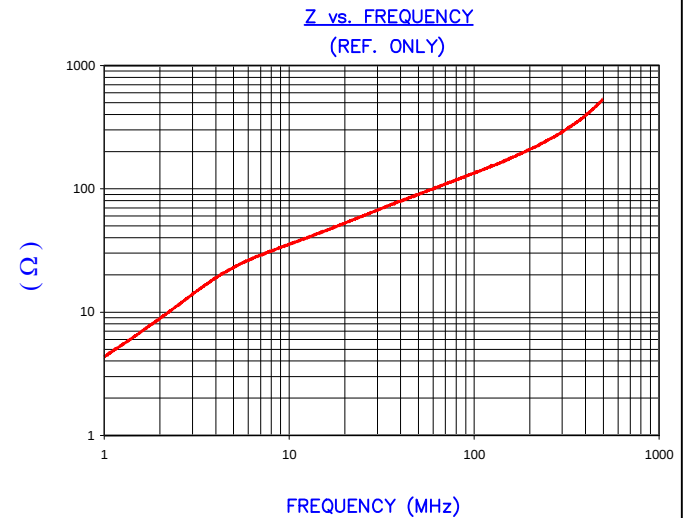

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture, REF.3131

**UNCONTROLLED
DOCUMENT**



DETAIL "A"
SCALE 3:1



NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC):mm [Inches]

BARE DIMENSIONS		28B2400-000	
A	60.96 [2.400]	+	1.22 [.048]
B	35.56 [1.400]	+	0.71 [.028]
C	12.70 [.500]	+	0.38 [.015]

WEIGHT/1000 109.37 kgs [241.12 Lbs]

DIMENSIONS ARE IN MM [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird™				
J	UPDATE COMPANY LOGO	05/22/15	QIU					
H	UPDATE Z SPECS AND COMPANY LOGO	06/25/04	JRK					
G	CHG P/N FROM 00*, REMOVE COATING SPECS	06/25/04	JRK					
F	UPDATE COATING DIMS, REM FLAT from CHAMFER DETAIL, ADJUST R. DIM, UPDATE PART WGT. UPDATE Z SPECS	10/15/03	JRK					
E	UPDATE FORMAT & Z SPECS, CURVE&TOLS	07/23/03	JRK	PROJECT/PART NUMBER:		REV	DRAWN BY:	
REV	DESCRIPTION	DATE	INT	28B2400-000		J	DJB	
				DATE:	07/03/90	SCALE:	.75:1	MATERIAL:
				CAD #	28B2400-000-J	TOOL #	B2400	FERRITE