

4


3

2

1

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	-			SEE SHEET 1 OF 2		

D










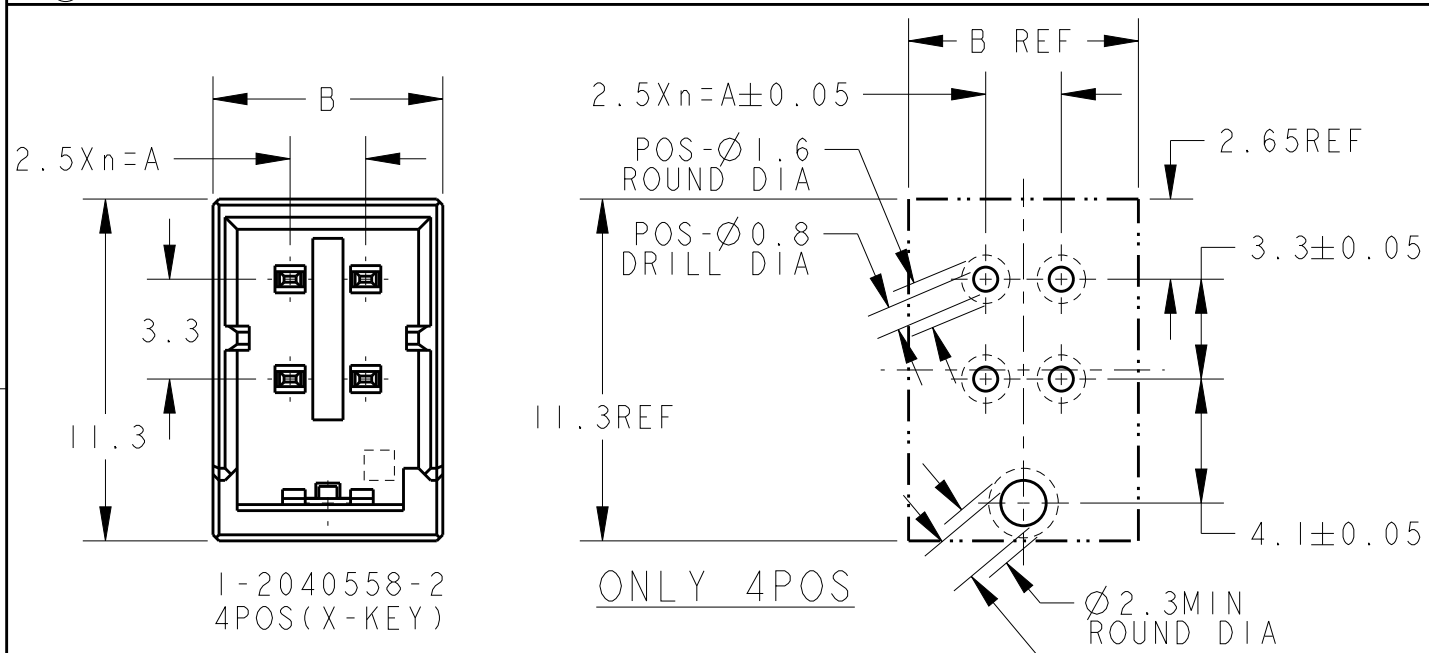


推奨基板取付穴寸法 : コネクタ搭載面 (非累積公差)
PC基板厚 : 1.0~1.6±0.1
RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE
(NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

C

B

A

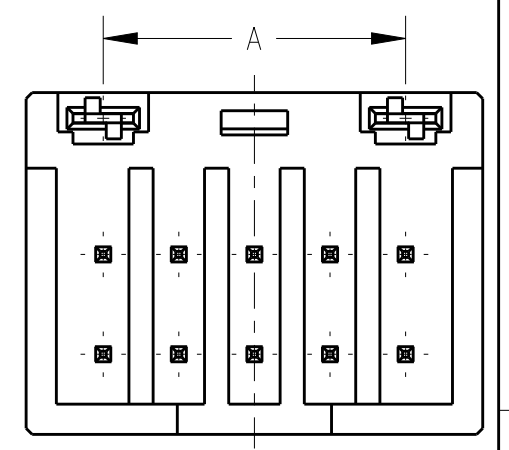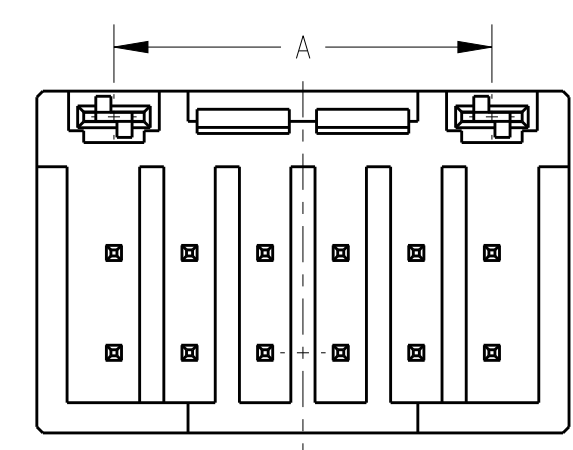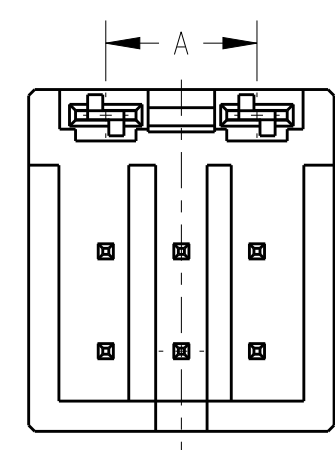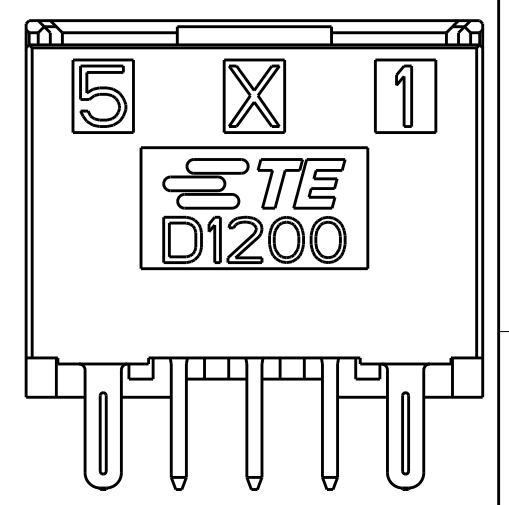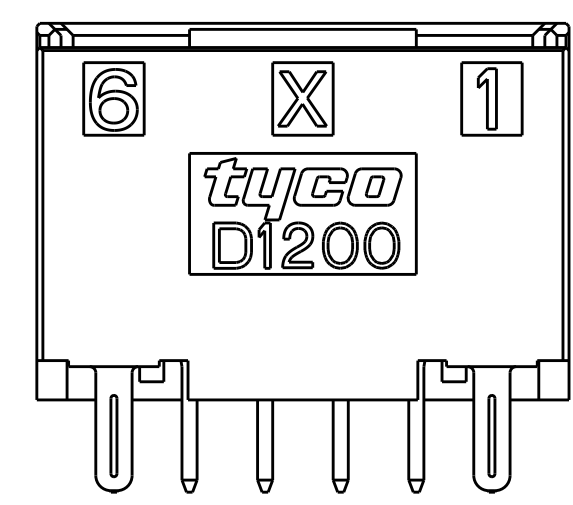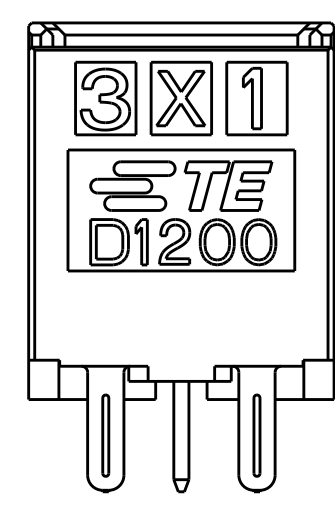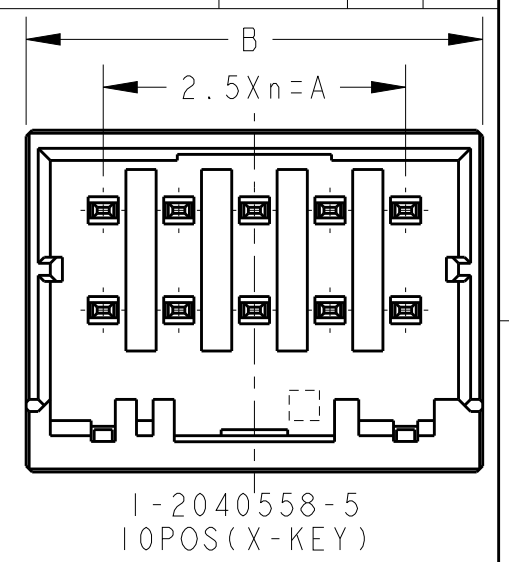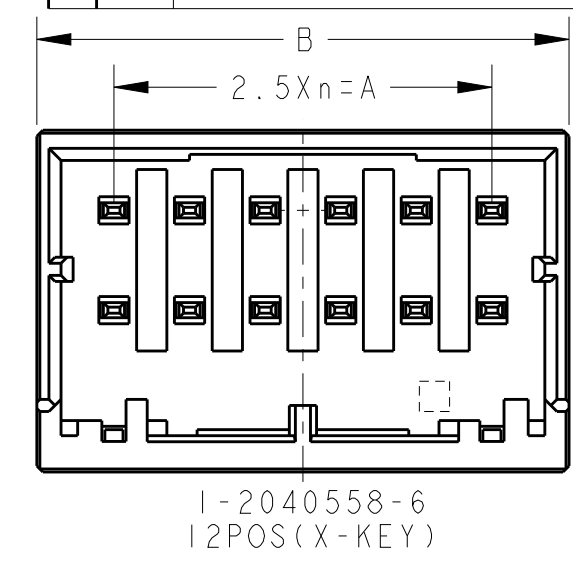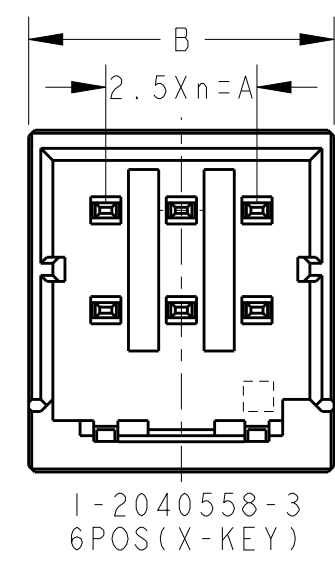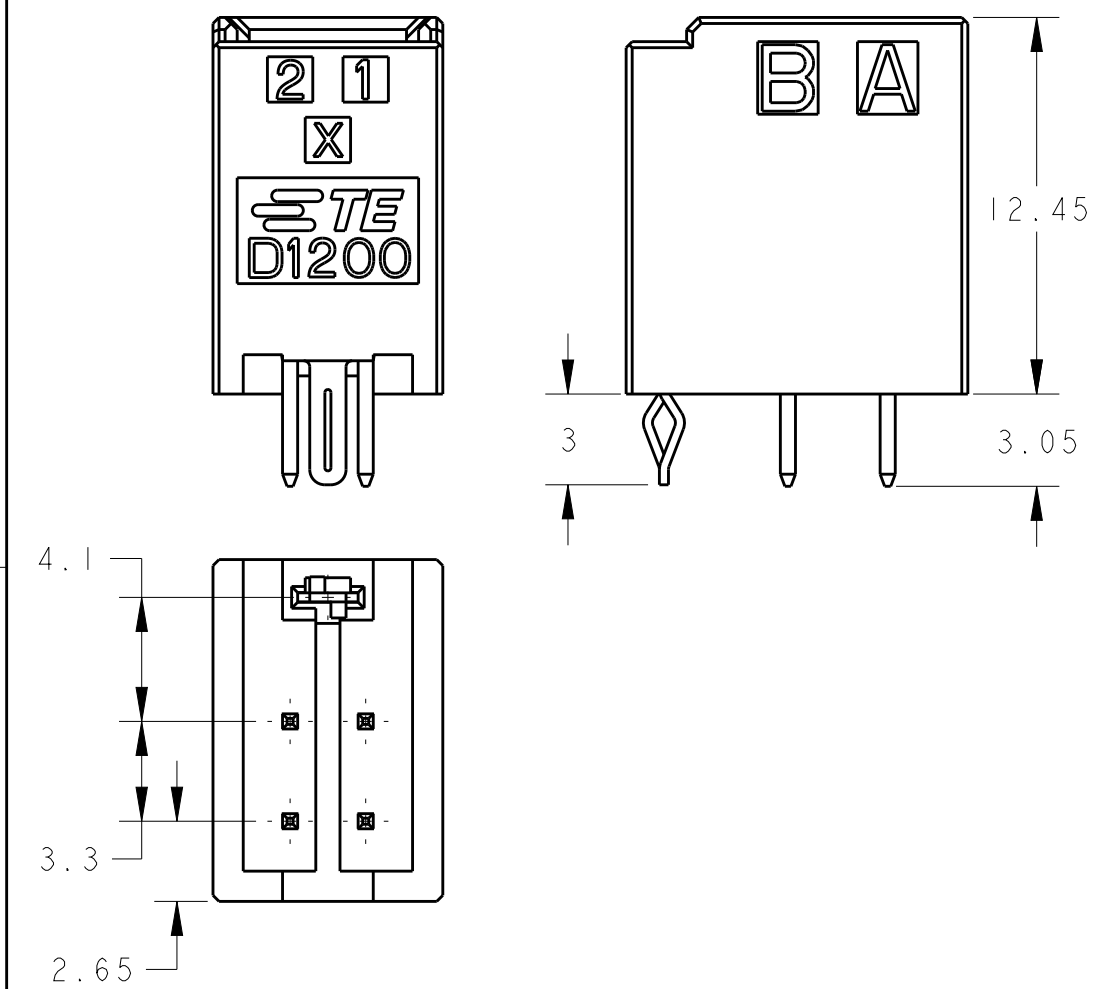

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. MAEBASHI 13MAY2008	TE Connectivity	
DIMENSIONS: mm		CHK T. KUDO 13MAY2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. MANABE 13MAY2008	NAME DYNAMIC DI200D 2.5mmPITCH HDR ASSY (V-TYPE) TIN PLATE 4-20POS	
0 PLC ±		PRODUCT SPEC 108-78298	SIZE A3	
1 PLC ±		APPLICATION SPEC 114-5377	CAGE CODE 00779	
2 PLC ±		WEIGHT -	DRAWING NO C-2040558	
3 PLC ±		CUSTOMER DRAWING	RESTRICTED TO -	
4 PLC ±			SCALE 2:1	
ANGLES ±			SHEET 2 OF 2	
FINISH -			REV C	