


For 1/4" x 1 1/4" Fuses

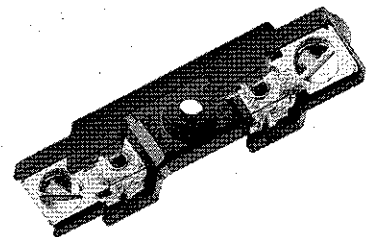

Series 8000

Construction: Blocks are molded flame retarded thermoplastic. Clips are spring-bronze.
Voltage Rating: 300V
Agency Approvals: UL Recognized under Components Program; File E14853A, Guide IZLT2
 CSA Certified Class 6225-01, File 47235


Anti-Rotation Pin: Single pole blocks may be ordered without the antirotation pin simply by adding an "X" to the number of poles (Example: BK/S-8000-1X).

Carton Quantity: 10; shelf package: 100.
Bulk Carton: Single-pole and 2-pole fuse blocks-1,000; Multiple-pole fuse blocks-3-8 pole: 200; 9-12 pole: 50. When ordering bulk quantities, prefix "BK" to catalog number. (Example: BK/S-8001-1-SNP).


Bolt-in Mounting

Series	Terminal	Angle	Cat. No.	Amperes	Poles (Suffix)
8000	Solder	40°	S-8002-1-SNP	CSA 21A	UL 25A
8100	3/16" Quick Connect	40°	S-8102-1-SNP	UL 20A	CSA 16A
8200	1/2" Quick Connect	40°	S-8202-1-SNP	UL 20A	CSA 16A
8300	Screw	—	S-8301-1-SNP	UL 30A	CSA 10A


Series	Terminal	Angle	Cat. No.	Amperes	Poles (Suffix)
8000	Solder	40°	S-8001-1-SNP	CSA 21A	UL 25A
8100	3/16" Quick Connect	40°	S-8101-1-SNP	UL 20A	CSA 16A
8200	1/2" Quick Connect	40°	S-8201-1-SNP	UL 20A	CSA 16A

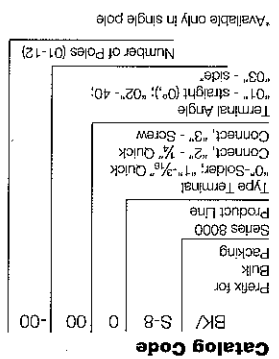

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

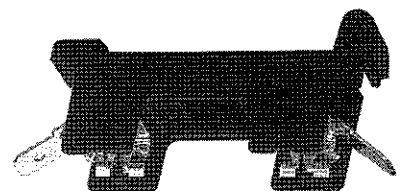

BIF document 2057

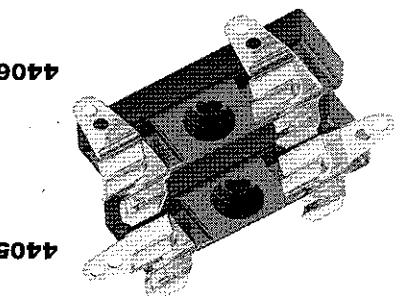


4406


4405

1/4" x 1 1/4" Single Pole


Construction: Bakelite base; spring-bronze, Albaloy-plate clips; 30 amperes, 250 volts; base width 1/2" (12.7mm).
No. 4405—0° Solder Terminals. Integral terminal and clip.

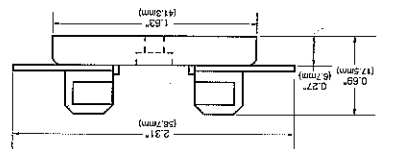


No. 4406—Side Solder Terminal. Spare Fuseblock

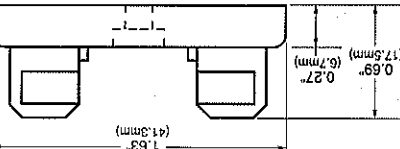

No. 2499—Side Quick-Connect Terminals. 1/4" (6.4mm); 15 amperes, 250 volts. UL Recognized, Guide IZLT2, File E14853.

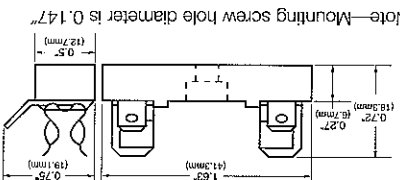

Note—Mounting screw hole diameter is 0.147" (3.7mm). Counterbore diameter, 0.314" (8.0mm). Max. Mounting Screw No. 6.

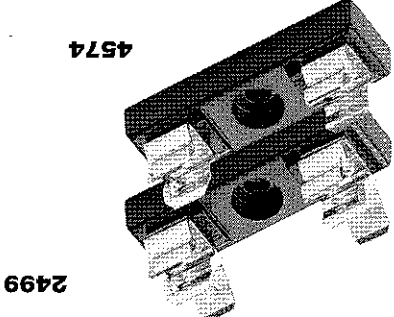

2499

4574



BIF document: 2101