



0.35mm Pitch 5863 Series

0.35mm ピッチ 嵌合高さ 0.8mm 金具付き SMT
0.35mm Pitch, Stacking Height=0.8mm, With Metal tabs, SMT


● Plug

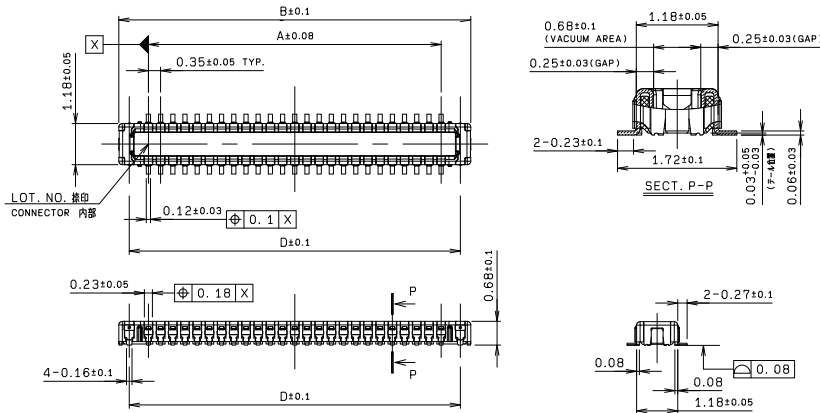

MATING CONDITION





MOUNTING LAYOUT

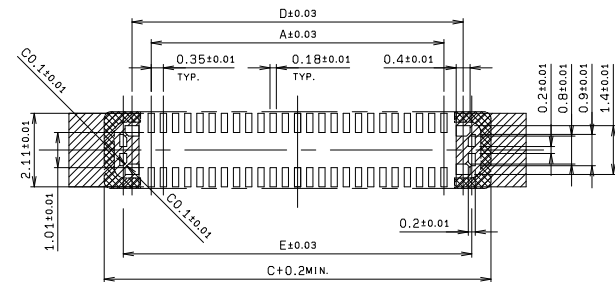

MOUNTING LAYOUT

⊞ : 絶縁エリア
INSULATION AREA



● Receptacle

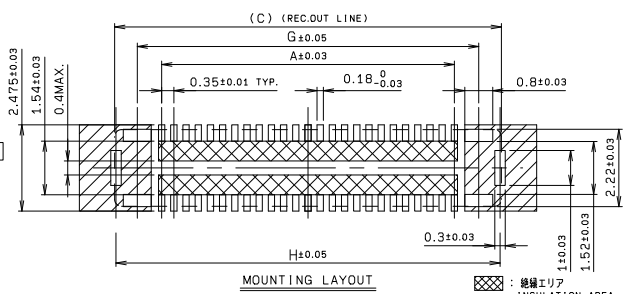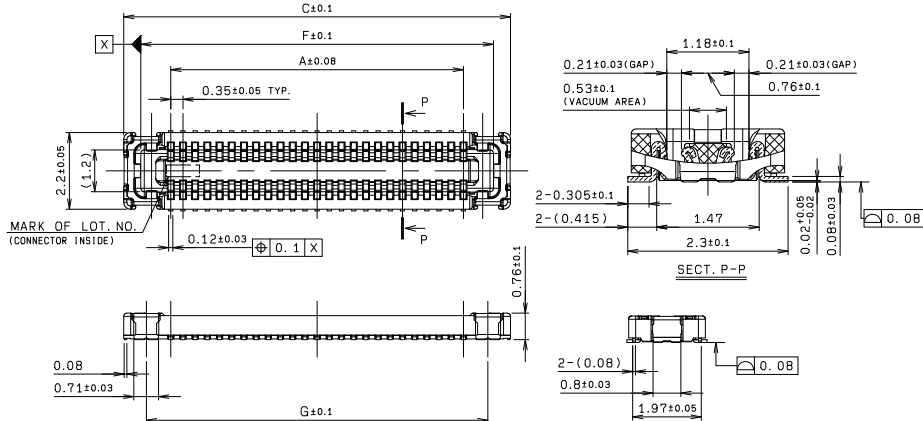


MOUNTING LAYOUT

⊞ : 絶縁エリア
INSULATION AREA

● Packaging

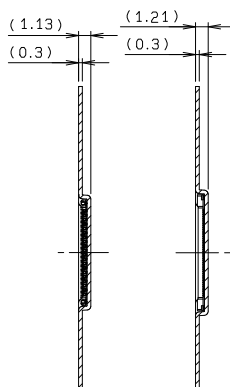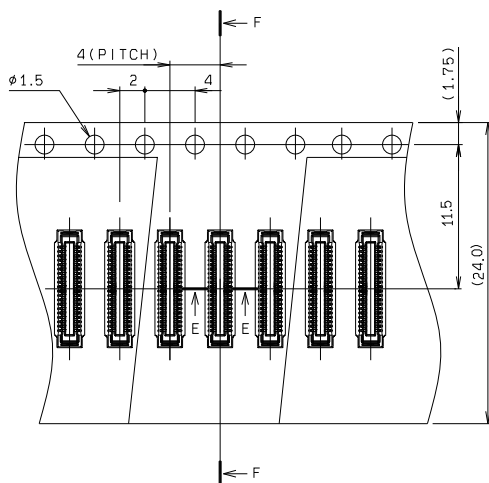

SECT. F-F



SECT. E-E

極数 NO. OF POS.	A	B	C	D	E	F	G	H
40	6.65	8.35	9.35	7.75	8.25	8.37	8.05	9.27
50	8.4	10.1	11.1	9.5	10.0	10.12	9.8	11.02
60	10.15	11.85	12.85	11.25	11.75	11.87	11.55	12.77

注文コード/Ordering Code

Plug

Part No. 14 5863 0XX 024 829+

Receptacle

Part No. 24 5863 0XX 104 829+

極数 No. of Pos.

極数 No. of Pos.

RoHS 対応品

RoHS Compliant Product

梱包数量 : 15,000 個 / リール

PACKING QUANTITY: 15,000/Reel

本カタログには推奨めっきを掲載しております。めっき種類・仕様、ならびに生産対応可能極数については営業部にご確認願います。
Recommended plating types are mentioned in this catalogue. For other plating types and their specifications, and available numbers of positions, please feel free to contact our sales department.