


## Block Diagram

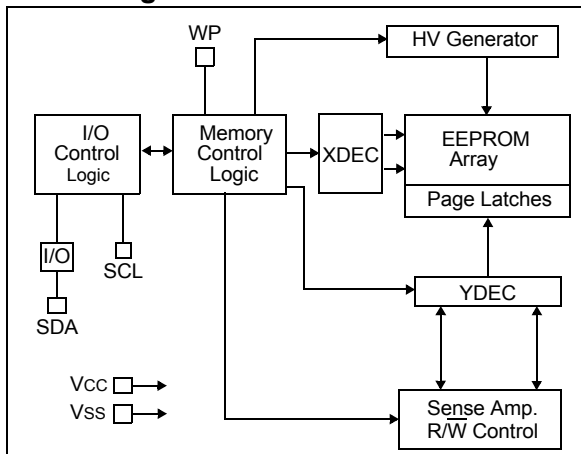

# 24AA01/24LC01B/24FC01

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings (†)

|                                                     |                                |
|-----------------------------------------------------|--------------------------------|
| V <sub>CC</sub> .....                               | 6.5V                           |
| All inputs and outputs w.r.t. V <sub>SS</sub> ..... | -0.3V to V <sub>CC</sub> +1.0V |
| Storage temperature .....                           | -65°C to +150°C                |
| Ambient temperature with power applied.....         | -40°C to +125°C                |
| ESD protection on all pins .....                    | ≥4 kV                          |

† **NOTICE:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**TABLE 1-1: DC CHARACTERISTICS**

| DC CHARACTERISTICS |                                       |                                         | Industrial (I): T <sub>A</sub> = -40°C to +85°C, V <sub>CC</sub> = +1.7V to +5.5V<br>Extended (E): T <sub>A</sub> = -40°C to +125°C, V <sub>CC</sub> = +2.5V to +5.5V (24LC01B)<br>Extended (E): T <sub>A</sub> = -40°C to +125°C, V <sub>CC</sub> = +1.7V to +5.5V (24FC01) |      |                     |       |                                                                                  |
|--------------------|---------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------------|-------|----------------------------------------------------------------------------------|
| Param. No.         | Symbol                                | Characteristic                          | Min.                                                                                                                                                                                                                                                                         | Typ. | Max.                | Units | Conditions                                                                       |
| D1                 | V <sub>IH</sub>                       | High-Level Input Voltage                | 0.7 V <sub>CC</sub>                                                                                                                                                                                                                                                          | —    | —                   | V     |                                                                                  |
| D2                 | V <sub>IL</sub>                       | Low-Level Input Voltage                 | —                                                                                                                                                                                                                                                                            | —    | 0.3 V <sub>CC</sub> | V     |                                                                                  |
| D3                 | V <sub>HYS</sub>                      | Hysteresis of Schmitt Trigger Inputs    | 0.05 V <sub>CC</sub>                                                                                                                                                                                                                                                         | —    | —                   | V     | (Note)                                                                           |
| D4                 | V <sub>OL</sub>                       | Low-Level Output Voltage                | —                                                                                                                                                                                                                                                                            | —    | 0.40                | V     | I <sub>OL</sub> = 3.0 mA, V <sub>CC</sub> = 2.5V                                 |
| D5                 | I <sub>LI</sub>                       | Input Leakage Current                   | —                                                                                                                                                                                                                                                                            | —    | ±1                  | μA    | V <sub>IN</sub> = V <sub>SS</sub> or V <sub>CC</sub>                             |
| D6                 | I <sub>LO</sub>                       | Output Leakage Current                  | —                                                                                                                                                                                                                                                                            | —    | ±1                  | μA    | V <sub>OUT</sub> = V <sub>SS</sub> or V <sub>CC</sub>                            |
| D7                 | C <sub>IN</sub> ,<br>C <sub>OUT</sub> | Pin Capacitance<br>(all inputs/outputs) | —                                                                                                                                                                                                                                                                            | —    | 10                  | pF    | V <sub>CC</sub> = 5.0V (Note)<br>T <sub>A</sub> = 25°C, F <sub>CLK</sub> = 1 MHz |
| D8                 | I <sub>CCWRITE</sub>                  | Operating Current                       | —                                                                                                                                                                                                                                                                            | —    | 3                   | mA    | V <sub>CC</sub> = 5.5V, SCL = 400 kHz                                            |
| D9                 | I <sub>CCREAD</sub>                   |                                         | —                                                                                                                                                                                                                                                                            | —    | 1                   | mA    | V <sub>CC</sub> = 5.5V, SCL = 400 kHz                                            |
| D10                | I <sub>CCS</sub>                      | Standby Current                         | —                                                                                                                                                                                                                                                                            | —    | 1                   | μA    | SDA = SCL = V <sub>CC</sub><br>WP = V <sub>SS</sub> , I-Temp.                    |
|                    |                                       |                                         | —                                                                                                                                                                                                                                                                            | —    | 3                   | μA    | SDA = SCL = V <sub>DD</sub><br>WP = V <sub>SS</sub> , E-Temp. (24FC01)           |
|                    |                                       |                                         | —                                                                                                                                                                                                                                                                            | —    | 5                   | μA    | SDA = SCL = V <sub>CC</sub><br>WP = V <sub>SS</sub> , E-Temp. (24LC01B)          |

**Note:** This parameter is periodically sampled and not 100% tested.

# 24AA01/24LC01B/24FC01

**TABLE 1-2 AC CHARACTERISTICS**

| AC CHARACTERISTICS |         |                            | Industrial (I): TA = -40°C to +85°C, VCC = +1.7V to +5.5V<br>Extended (E): TA = -40°C to +125°C, VCC = +2.5V to +5.5V (24LC01B)<br>Extended (E): TA = -40°C to +125°C, VCC = +1.7V to +5.5V (24FC01) |      |      |       |                                     |
|--------------------|---------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------------------------------------|
| Param. No.         | Symbol  | Characteristic             | Min.                                                                                                                                                                                                 | Typ. | Max. | Units | Conditions                          |
| 1                  | FCLK    | Clock Frequency            | —                                                                                                                                                                                                    | —    | 400  | kHz   | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 100  | kHz   | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 1000 | kHz   | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 2                  | THIGH   | Clock High Time            | 600                                                                                                                                                                                                  | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 4000                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 260                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 3                  | TLOW    | Clock Low Time             | 1300                                                                                                                                                                                                 | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 4700                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 500                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 4                  | TR      | SDA and SCL Rise Time      | —                                                                                                                                                                                                    | —    | 300  | ns    | 2.5V ≤ VCC ≤ 5.5V (Note 1)          |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 1000 | ns    | 1.7V ≤ VCC < 2.5V (24AA01) (Note 1) |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 1000 | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01) (Note 1) |
| 5                  | TF      | SDA and SCL Fall Time      | —                                                                                                                                                                                                    | —    | 300  | ns    | (Note 1)                            |
| 6                  | THD:STA | Start Condition Hold Time  | 600                                                                                                                                                                                                  | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 4000                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 250                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 7                  | TSU:STA | Start Condition Setup Time | 600                                                                                                                                                                                                  | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 4700                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 250                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 8                  | THD:DAT | Data Input Hold Time       | 0                                                                                                                                                                                                    | —    | —    | ns    | (Note 2)                            |
| 9                  | TSU:DAT | Data Input Setup Time      | 100                                                                                                                                                                                                  | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 250                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 50                                                                                                                                                                                                   | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 10                 | TSU:STO | Stop Condition Setup Time  | 600                                                                                                                                                                                                  | —    | —    | ns    | 2.5V ≤ VCC ≤ 5.5V                   |
|                    |         |                            | 4000                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC < 2.5V (24AA01)          |
|                    |         |                            | 250                                                                                                                                                                                                  | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 11                 | TSU:WP  | WP Setup Time              | 0                                                                                                                                                                                                    | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 12                 | THD:WP  | WP Hold Time               | 1000                                                                                                                                                                                                 | —    | —    | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01)          |
| 13                 | TAA     | Output Valid from Clock    | —                                                                                                                                                                                                    | —    | 900  | ns    | 2.5V ≤ VCC ≤ 5.5V (Note 2)          |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 3500 | ns    | 1.7V ≤ VCC < 2.5V (24AA01) (Note 2) |
|                    |         |                            | —                                                                                                                                                                                                    | —    | 450  | ns    | 1.7V ≤ VCC ≤ 5.5V (24FC01) (Note 2) |

**Note 1:** Characterized but not 100% tested.

**2:** As a transmitter, the device must provide an internal minimum delay time to bridge the undefined region (minimum 300 ns) of the falling edge of SCL to avoid unintended generation of Start or Stop conditions.

**3:** CB = total capacitance of one bus line in pF.

**4:** This parameter is not tested but ensured by characterization. For endurance estimates in a specific application, please consult the Total Endurance™ Model which can be obtained from Microchip's website at [www.microchip.com](http://www.microchip.com).

# 24AA01/24LC01B/24FC01

TABLE 1-2 AC CHARACTERISTICS (CONTINUED)

| AC CHARACTERISTICS (Continued) |        |                                                                                  | Industrial (I): TA = -40°C to +85°C, VCC = +1.7V to +5.5V<br>Extended (E): TA = -40°C to +125°C, VCC = +2.5V to +5.5V (24LC01B)<br>Extended (E): TA = -40°C to +125°C, VCC = +1.7V to +5.5V (24FC01) |      |      |        |                                             |
|--------------------------------|--------|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|--------|---------------------------------------------|
| Param. No.                     | Symbol | Characteristic                                                                   | Min.                                                                                                                                                                                                 | Typ. | Max. | Units  | Conditions                                  |
| 14                             | TBUF   | Bus Free Time: The time the bus must be free before a new transmission can start | 1300                                                                                                                                                                                                 | —    | —    | ns     | 2.5V ≤ VCC ≤ 5.5V                           |
|                                |        |                                                                                  | 4700                                                                                                                                                                                                 | —    | —    | ns     | 1.7V ≤ VCC < 2.5V (24AA01)                  |
|                                |        |                                                                                  | 500                                                                                                                                                                                                  | —    | —    | ns     | 1.7V ≤ VCC ≤ 5.5V (24FC01)                  |
| 15                             | TOF    | Output Fall Time from VIH Minimum to VIL Maximum                                 | 20+0.1CB                                                                                                                                                                                             | —    | 250  | ns     | 2.5V ≤ VCC ≤ 5.5V (24LC01B) (Notes 1 and 3) |
|                                |        |                                                                                  | —                                                                                                                                                                                                    | —    | 250  | ns     | 1.7V ≤ VCC < 2.5V (24AA01) (Note 1)         |
| 16                             | TSP    | Input Filter Spike Suppression (SDA and SCL pins)                                | —                                                                                                                                                                                                    | —    | 50   | ns     | (Note 1)                                    |
| 17                             | TWC    | Write Cycle Time (byte or page)                                                  | —                                                                                                                                                                                                    | —    | 5    | ms     |                                             |
| 18                             |        | Endurance                                                                        | 1,000,000                                                                                                                                                                                            | —    | —    | cycles | 25°C, 5.5V, Page Mode (Note 4)              |


**Note 1:** Characterized but not 100% tested.

**2:** As a transmitter, the device must provide an internal minimum delay time to bridge the undefined region (minimum 300 ns) of the falling edge of SCL to avoid unintended generation of Start or Stop conditions.

**3:** CB = total capacitance of one bus line in pF.

**4:** This parameter is not tested but ensured by characterization. For endurance estimates in a specific application, please consult the Total Endurance™ Model which can be obtained from Microchip's website at [www.microchip.com](http://www.microchip.com).

FIGURE 1-1: BUS TIMING DATA

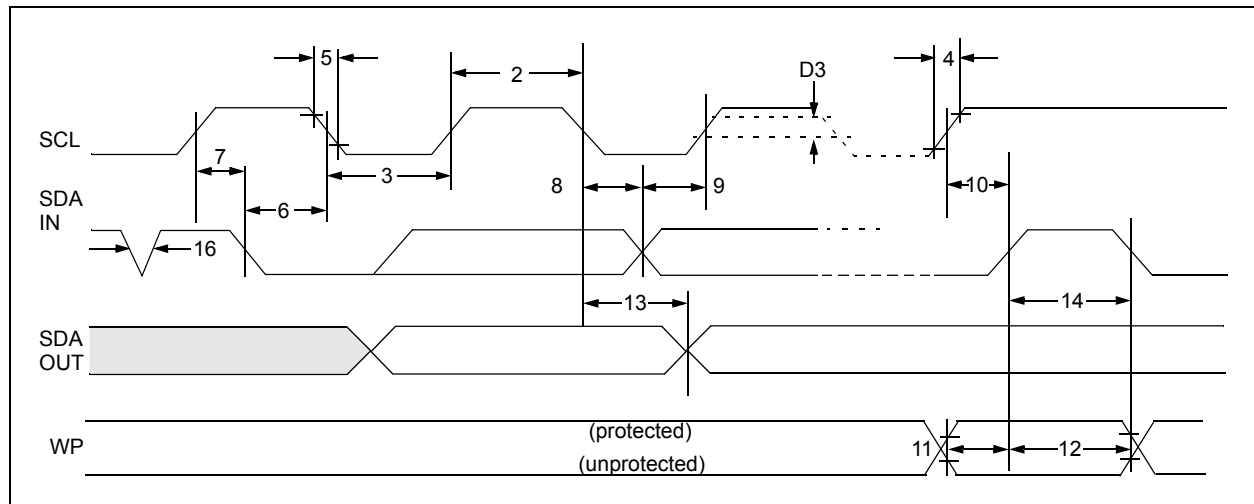

## 2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 2-1](#).

**TABLE 2-1: PIN FUNCTION TABLE**

| Name | DFN | MSOP | PDIP | SC-70 | SOIC | SOT-23 | TDFN <sup>(1)</sup> | TSSOP | UDFN <sup>(1)</sup> | Description             |
|------|-----|------|------|-------|------|--------|---------------------|-------|---------------------|-------------------------|
| A0   | 1   | 1    | 1    | —     | 1    | —      | 1                   | 1     | 1                   | Not Connected           |
| A1   | 2   | 2    | 2    | —     | 2    | —      | 2                   | 2     | 2                   | Not Connected           |
| A2   | 3   | 3    | 3    | —     | 3    | —      | 3                   | 3     | 3                   | Not Connected           |
| Vss  | 4   | 4    | 4    | 2     | 4    | 2      | 4                   | 4     | 4                   | Ground                  |
| SDA  | 5   | 5    | 5    | 3     | 5    | 3      | 5                   | 5     | 5                   | Serial Address/Data I/O |
| SCL  | 6   | 6    | 6    | 1     | 6    | 1      | 6                   | 6     | 6                   | Serial Clock            |
| WP   | 7   | 7    | 7    | 5     | 7    | 5      | 7                   | 7     | 7                   | Write-Protect Input     |
| Vcc  | 8   | 8    | 8    | 4     | 8    | 4      | 8                   | 8     | 8                   | Power Supply            |

**Note 1:** The exposed pad on the TDFN/UDFN package can be connected to Vss or left floating.

### 2.1 A0, A1, A2

The A0, A1 and A2 pins are not used by the 24XX01. They may be left floating or tied to either Vss or Vcc.

### 2.2 Serial Address/Data Input/Output (SDA)

The SDA input is a bidirectional pin used to transfer addresses and data into and out of the device. Since it is an open-drain terminal, the SDA bus requires a pull-up resistor to Vcc (typical 10 kΩ for 100 kHz, 2 kΩ for 400 kHz and 1 MHz).

For normal data transfer, SDA is allowed to change only during SCL low. Changes during SCL high are reserved for indicating Start and Stop conditions.

### 2.3 Serial Clock (SCL)

The SCL input is used to synchronize the data transfer to and from the device.

### 2.4 Write-Protect (WP)

This pin must be connected to either Vss or Vcc.

If tied to Vss, normal memory operation is enabled (read/write the entire memory 00-7F).

If tied to Vcc, write operations are inhibited. The entire memory will be write-protected. Read operations are not affected.

## 3.0 FUNCTIONAL DESCRIPTION

The 24XX01 supports a bidirectional, 2-wire bus and data transmission protocol. A device that sends data onto the bus is defined as transmitter, while defining a device receiving data as a receiver. The bus has to be controlled by a master device which generates the Serial Clock (SCL), controls the bus access and generates the Start and Stop conditions, while the 24XX01 works as slave. Both master and slave can operate as transmitter or receiver, but the master device determines which mode is activated.

## 4.0 BUS CHARACTERISTICS

The following **bus protocol** has been defined:

- Data transfer may be initiated only when the bus is not busy.
- During data transfer, the data line must remain stable whenever the clock line is high. Changes in the data line while the clock line is high will be interpreted as a Start or Stop condition.

Accordingly, the following bus conditions have been defined (Figure 4-1).

### 4.1 Bus Not Busy (A)

Both data and clock lines remain high.

### 4.2 Start Data Transfer (B)

A high-to-low transition of the SDA line while the clock (SCL) is high determines a Start condition. All commands must be preceded by a Start condition.

### 4.3 Stop Data Transfer (C)

A low-to-high transition of the SDA line while the clock (SCL) is high determines a Stop condition. All operations must be ended with a Stop condition.

## 4.4 Data Valid (D)

The state of the data line represents valid data when, after a Start condition, the data line is stable for the duration of the high period of the clock signal.

The data on the line must be changed during the low period of the clock signal. There is one clock pulse per bit of data.

Each data transfer is initiated with a Start condition and terminated with a Stop condition. The number of data bytes transferred between the Start and Stop conditions is determined by the master device and is, theoretically, unlimited (although only the last eight will be stored when doing a write operation). When an overwrite does occur, it will replace data based on the first-in first-out (FIFO) principle.


## 4.5 Acknowledge

Each receiving device, when addressed, is obliged to generate an acknowledge after the reception of each byte. The master device must generate an extra clock pulse which is associated with this Acknowledge bit.

**Note:** The 24XX01 does not generate any Acknowledge bits if an internal programming cycle is in progress.

The device that acknowledges has to pull down the SDA line during the acknowledge clock pulse in such a way that the SDA line is stable-low during the high period of the acknowledge-related clock pulse. Moreover, setup and hold times must be taken into account. During reads, a master must signal an end of data to the slave by not generating an Acknowledge bit on the last byte that has been clocked out of the slave. In this case, the slave (24XX01) will leave the data line high to enable the master to generate the Stop condition.

**FIGURE 4-1: DATA TRANSFER SEQUENCE ON THE SERIAL BUS**

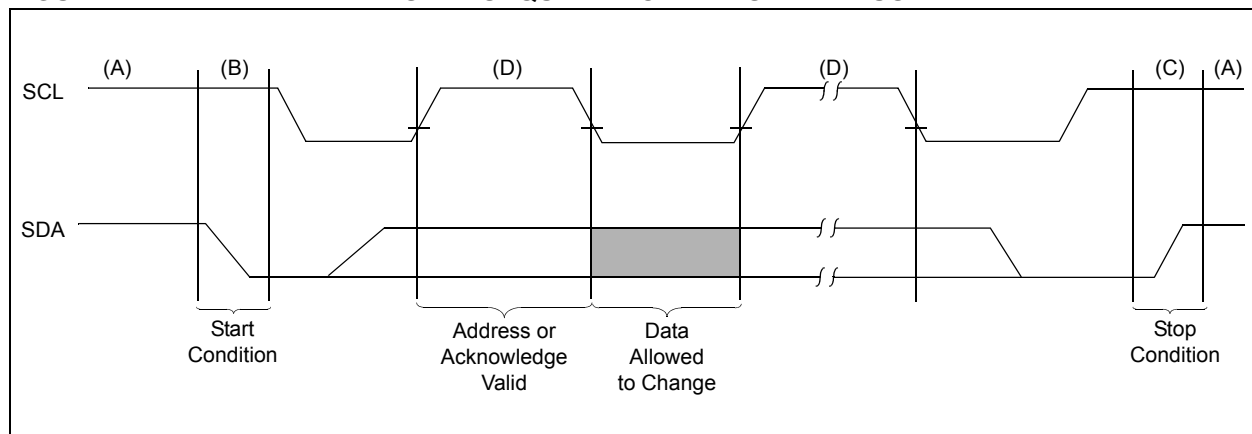


## 5.0 DEVICE ADDRESSING

A control byte is the first byte received following the Start condition from the master device. The control byte consists of a four-bit control code. For the 24XX01, this is set as '1010' binary for read and write operations. The next three bits of the control byte are "don't cares" for the 24XX01. The combination of the 4-bit control code and the next three bits are called the slave address.

The last bit of the control byte is the Read/Write (R/W) bit and it defines the operation to be performed. When set to '1', a read operation is selected. When set to '0', a write operation is selected. Following the Start condition, the 24XX01 monitors the SDA bus, checking the device type identifier being transmitted. Upon receiving a valid slave address and the R/W bit, the slave device outputs an Acknowledge signal on the SDA line. Depending on the state of the R/W bit, the 24XX01 will select a read or write operation.


The next byte received defines the address of the first data byte within the selected block (Figure 5-2). Because only A6...A0 are used, the upper address bit is a "don't care".

FIGURE 5-1: CONTROL BYTE ALLOCATION

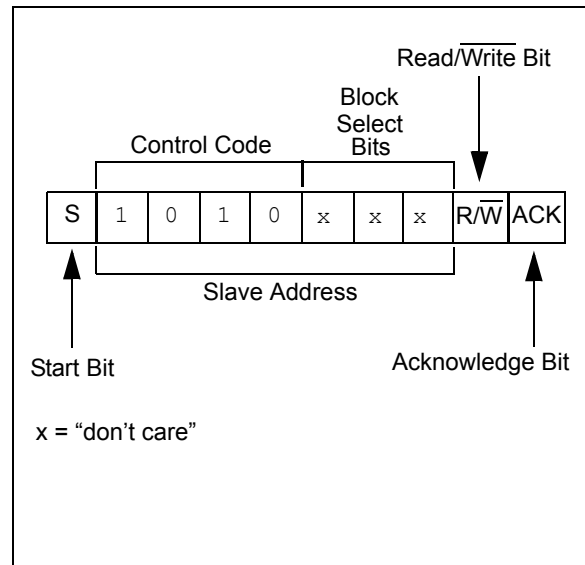

| Operation | Control Code | Block Select  | R/W |
|-----------|--------------|---------------|-----|
| Read      | 1010         | Block Address | 1   |
| Write     | 1010         | Block Address | 0   |

FIGURE 5-2: ADDRESS SEQUENCE BIT ASSIGNMENTS

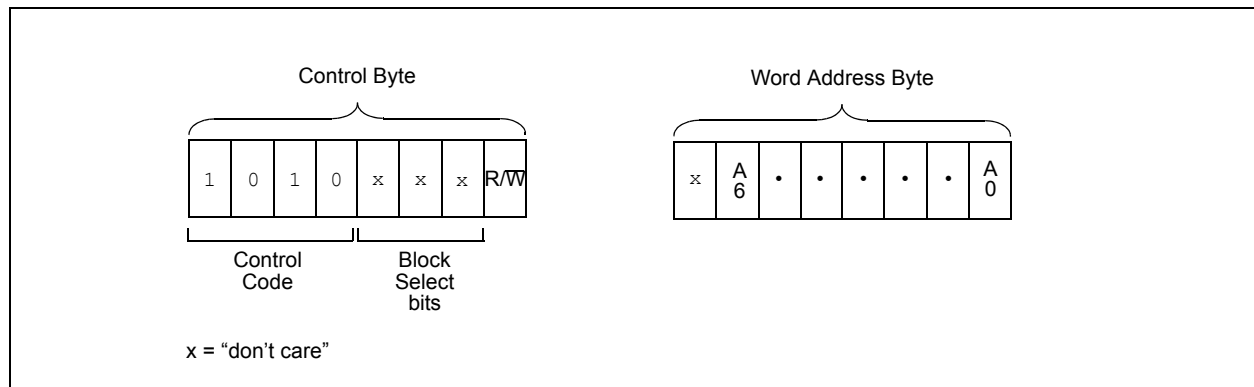

## 6.0 WRITE OPERATION

### 6.1 Byte Write

Following the Start condition from the master, the device code (4 bits), the block address (3 bits, “don’t cares”) and the R/W bit, which is a logic-low, is placed onto the bus by the master transmitter. This indicates to the addressed slave receiver that a byte with a word address will follow after it has generated an Acknowledge bit during the ninth clock cycle. Therefore, the next byte transmitted by the master is the word address and will be written into the Address Pointer of the 24XX01. After receiving another Acknowledge signal from the 24XX01, the master device will transmit the data word to be written into the addressed memory location. The 24XX01 acknowledges again and the master generates a Stop condition. This initiates the internal write cycle, and, during this time, the 24XX01 will not generate Acknowledge signals (Figure 6-1).

### 6.2 Page Write


The write control byte, word address and first data byte are transmitted to the 24XX01 in the same way as in a byte write. However, instead of generating a Stop condition, the master transmits up to 8 data bytes to the 24XX01, which are temporarily stored in the on-chip page buffer and will be written into the memory once the master has transmitted a Stop condition. Upon receipt of each word, the three lower-order Address Pointer bits, which form the byte counter, are internally incremented by one. The higher-order five bits of the word address remain constant. If the master should transmit more than eight words prior to generating the Stop condition, the Address Pointer will roll over and the previously received data will be overwritten. As with the byte write operation, once the Stop condition is received, an internal write cycle will begin (Figure 6-2).

**Note:** Page write operations are limited to writing bytes within a single physical page **regardless** of the number of bytes actually being written. Physical page boundaries start at addresses that are integer multiples of the page buffer size (or ‘page size’) and end at addresses that are integer multiples of page size – 1. If a page write command attempts to write across a physical page boundary, the result is that the data wraps around to the beginning of the current page (overwriting data previously stored there), instead of being written to the next page, as might be expected. It is therefore necessary for the application software to prevent page write operations that would attempt to cross a page boundary.


### 6.3 Write Protection

The WP pin allows the user to write-protect the entire array (00-7F) when the pin is tied to VCC. If tied to VSS, the write protection is disabled.

**FIGURE 6-1: BYTE WRITE**

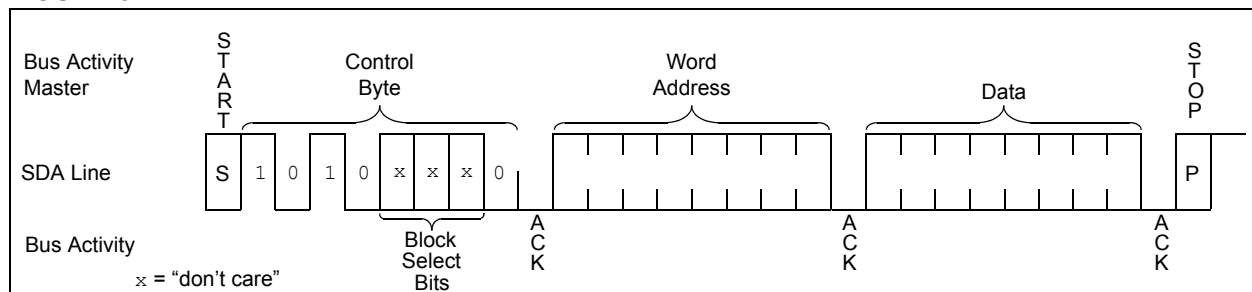


**FIGURE 6-2: PAGE WRITE**

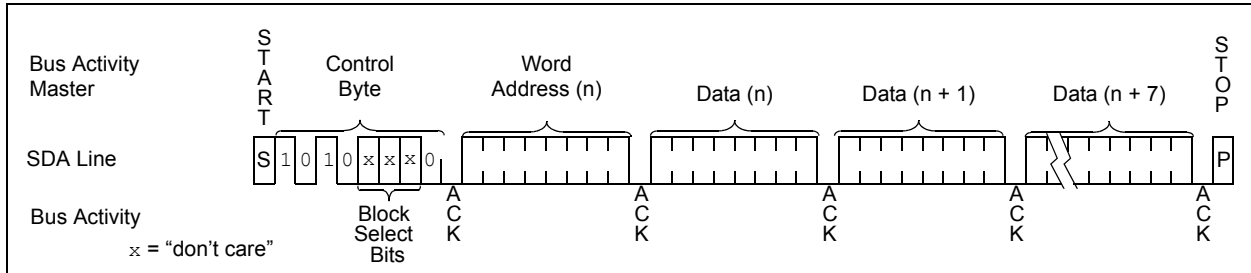

## 7.0 ACKNOWLEDGE POLLING


Since the device will not acknowledge during a write cycle, this can be used to determine when the cycle is complete (this feature can be used to maximize bus throughput). Once the Stop condition for a write command has been issued from the master, the device initiates the internally-timed write cycle. ACK polling can then be initiated immediately. This involves the master sending a Start condition followed by the control byte for a write command ( $R/\overline{W} = 0$ ). If the device is still busy with the write cycle, no ACK will be returned. If the cycle is complete, the device will return the ACK and the master can then proceed with the next read or write operation. See [Figure 7-1](#) for a flow diagram of this operation.

**FIGURE 7-1: ACKNOWLEDGE POLLING FLOW**

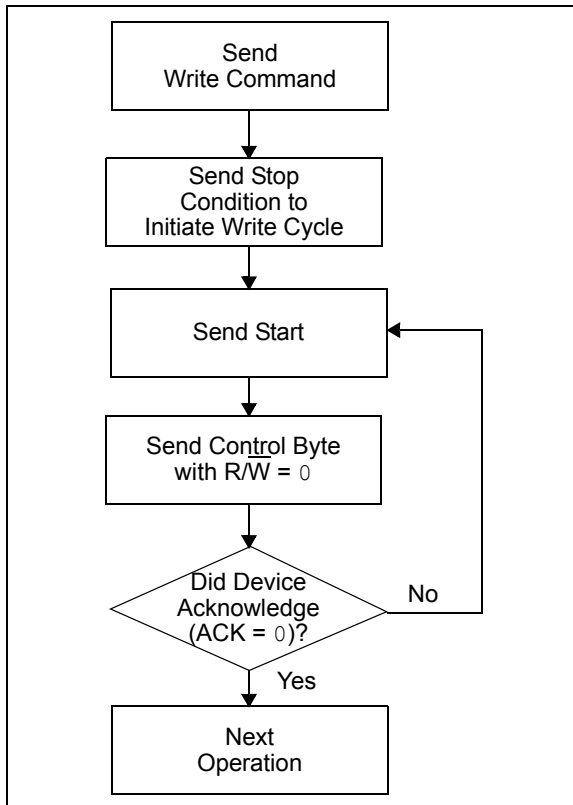




**FIGURE 8-2: RANDOM READ**

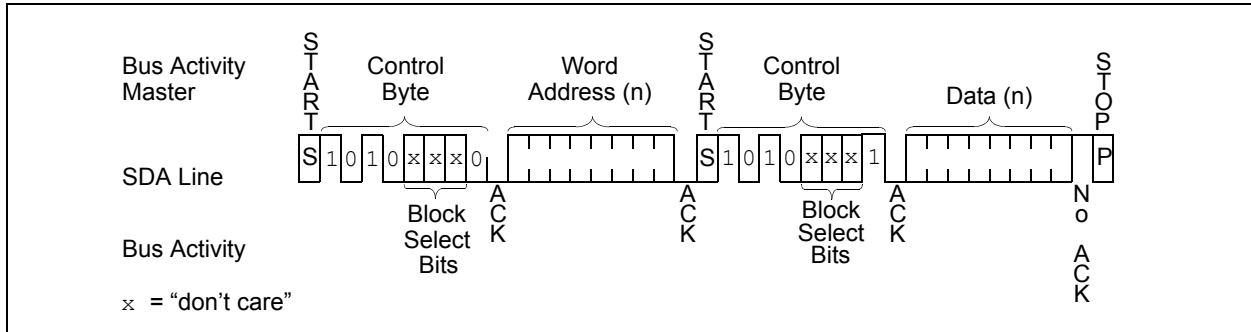


**FIGURE 8-3: SEQUENTIAL READ**

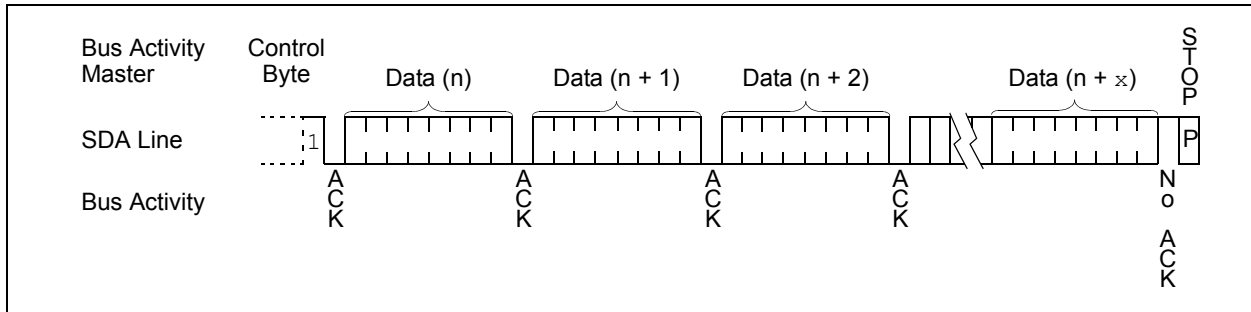


## 9.0 PACKAGING INFORMATION

### 9.1 Package Marking Information\*


8-Lead 2x3 DFN




Example




8-Lead MSOP




Example




8-Lead PDIP (300 mil)




Example




5-Lead SC-70




Example



8-Lead SOIC (3.90 mm)




Example




# 24AA01/24LC01B/24FC01


5-Lead SOT-23 (1-Line Marking)




Example




5-Lead SOT-23 (2-Line Marking)




Example



8-Lead 2x3 TDFN




Example




8-Lead TSSOP




Example



8-Lead 2x3 UDFN



Example



| Part Number | 1 <sup>st</sup> Line Marking Codes |                      |      |                       |                       |        |        |        |        |                     |                     |
|-------------|------------------------------------|----------------------|------|-----------------------|-----------------------|--------|--------|--------|--------|---------------------|---------------------|
|             | TSSOP                              | MSOP                 | UDFN | SOT-23                |                       | DFN    |        | TDFN   |        | SC-70               |                     |
|             |                                    |                      |      | I-Temp                | E-Temp                | I-Temp | E-Temp | I-Temp | E-Temp | I-Temp              | E-Temp              |
| 24AA01      | 4A01                               | 4A01T <sup>(1)</sup> | —    | B1NN <sup>(2,3)</sup> | —                     | 211    | —      | A11    | —      | B2NN <sup>(2)</sup> | —                   |
| 24LC01B     | 4L1B                               | 4L1BT <sup>(1)</sup> | —    | M1NN <sup>(2,3)</sup> | N1NN <sup>(2,3)</sup> | 214    | 215    | A14    | A15    | B1NN <sup>(2)</sup> | B3NN <sup>(2)</sup> |
| 24FC01      | AADP                               | 24FC01               | ADM  | AAEUYY <sup>(4)</sup> | AAEUYY <sup>(4)</sup> | —      | —      | —      | —      | —                   | —                   |

**Note 1:** T = Temperature grade (I, E)

**2:** NN = Alphanumeric traceability code

**3:** These parts use the 1-line SOT-23 marking format

**4:** These parts use the 2-line SOT-23 marking format

|                |                                                                                   |                                                                  |
|----------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------|
| <b>Legend:</b> | XX...X                                                                            | Part number or part number code                                  |
|                | T                                                                                 | Temperature (I, E)                                               |
|                | Y                                                                                 | Year code (last digit of calendar year)                          |
|                | YY                                                                                | Year code (last 2 digits of calendar year)                       |
|                | WW                                                                                | Week code (week of January 1 is week '01')                       |
|                | NNN                                                                               | Alphanumeric traceability code (2 characters for small packages) |
|                |  | JEDEC® designator for Matte Tin (Sn)                             |

\* Standard OTP marking consists of Microchip part number, year code, week code, and traceability code.


**Note:** For very small packages with no room for the JEDEC® designator , the marking will only appear on the outer carton or reel label.

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Dual Flat, No Lead Package (MC) – 2x3x0.9 mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

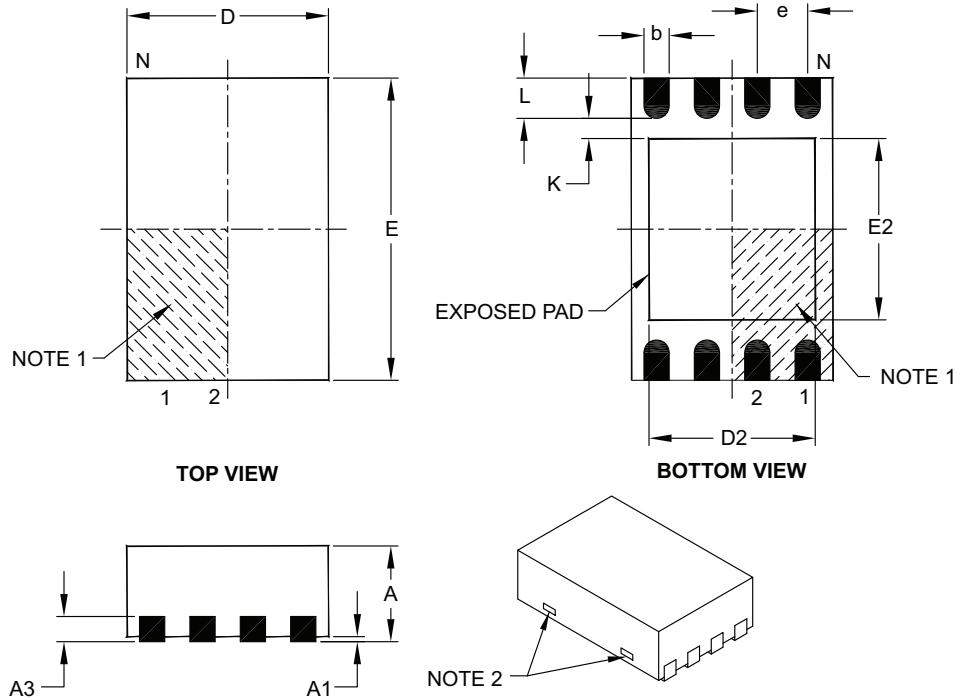

| Dimension Limits       | Units | MILLIMETERS |      |      |
|------------------------|-------|-------------|------|------|
|                        |       | MIN         | NOM  | MAX  |
| Number of Pins         | N     | 8           |      |      |
| Pitch                  | e     | 0.50 BSC    |      |      |
| Overall Height         | A     | 0.80        | 0.90 | 1.00 |
| Standoff               | A1    | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3    | 0.20 REF    |      |      |
| Overall Length         | D     | 2.00 BSC    |      |      |
| Overall Width          | E     | 3.00 BSC    |      |      |
| Exposed Pad Length     | D2    | 1.30        | –    | 1.55 |
| Exposed Pad Width      | E2    | 1.50        | –    | 1.75 |
| Contact Width          | b     | 0.20        | 0.25 | 0.30 |
| Contact Length         | L     | 0.30        | 0.40 | 0.50 |
| Contact-to-Exposed Pad | K     | 0.20        | –    | –    |

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package may have one or more exposed tie bars at ends.
3. Package is saw singulated.
4. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-123C

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Dual Flat, No Lead Package (MC) - 2x3x0.9mm Body [DFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

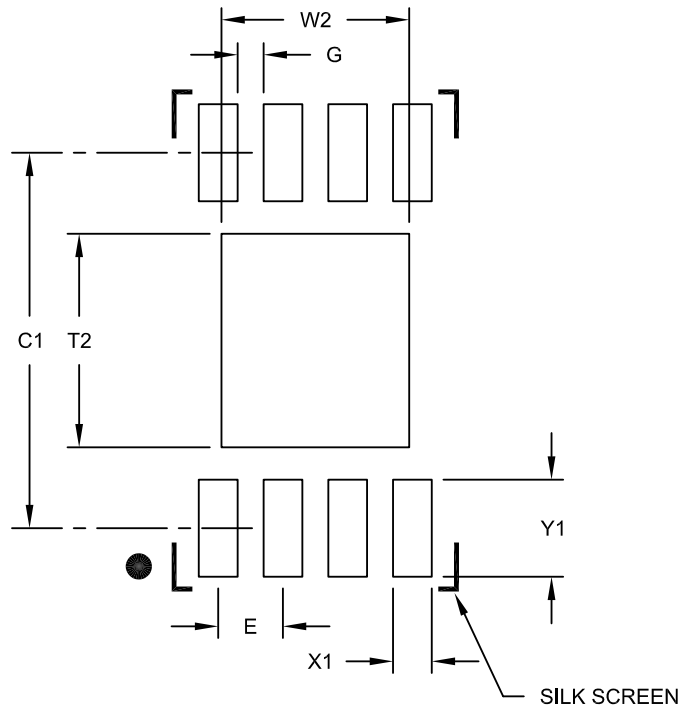

RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |      |      |
|----------------------------|----|-------------|------|------|
| Dimension Limits           |    | MIN         | NOM  | MAX  |
| Contact Pitch              | E  | 0.50 BSC    |      |      |
| Optional Center Pad Width  | W2 |             |      | 1.45 |
| Optional Center Pad Length | T2 |             |      | 1.75 |
| Contact Pad Spacing        | C1 |             | 2.90 |      |
| Contact Pad Width (X8)     | X1 |             |      | 0.30 |
| Contact Pad Length (X8)    | Y1 |             |      | 0.75 |
| Distance Between Pads      | G  | 0.20        |      |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2123B

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

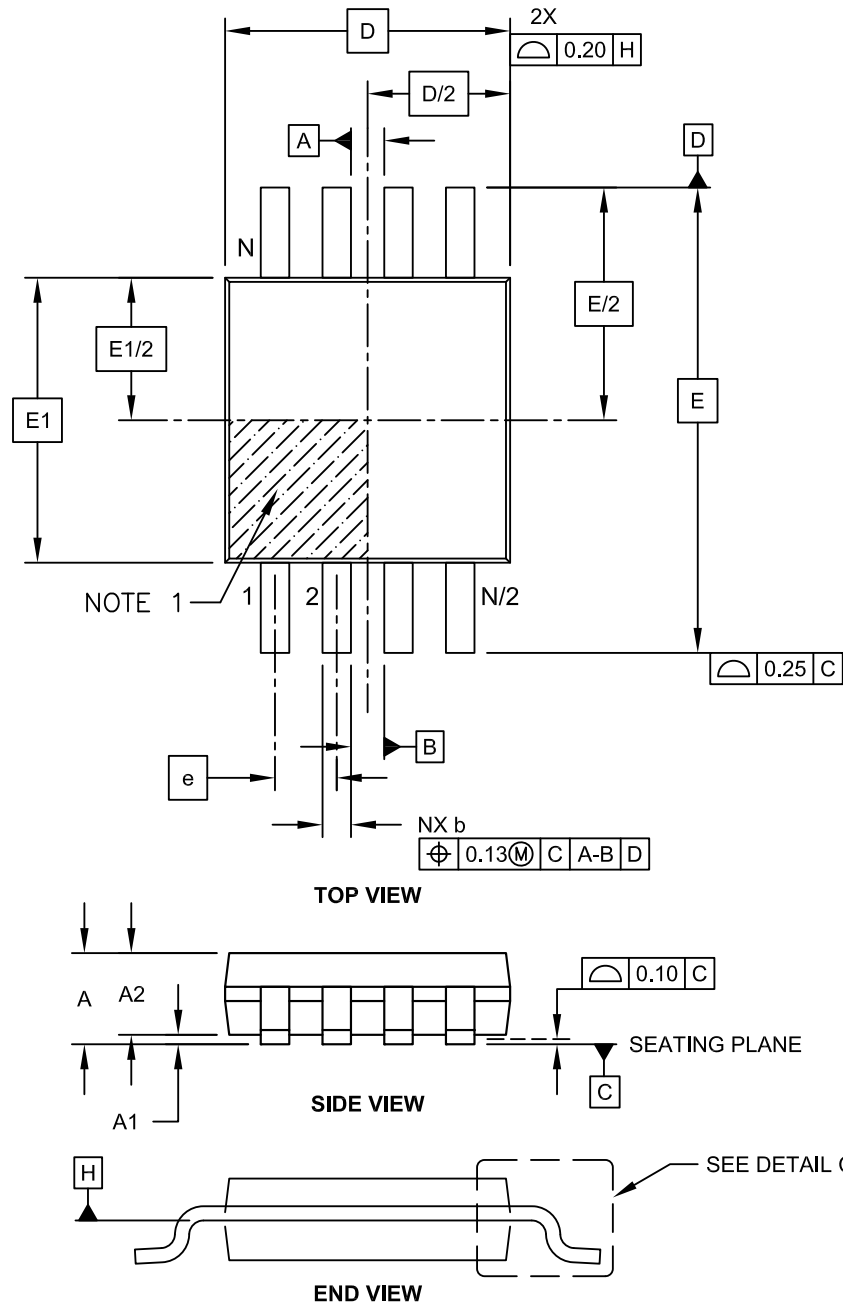

Microchip Technology Drawing C04-111C Sheet 1 of 2

## 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

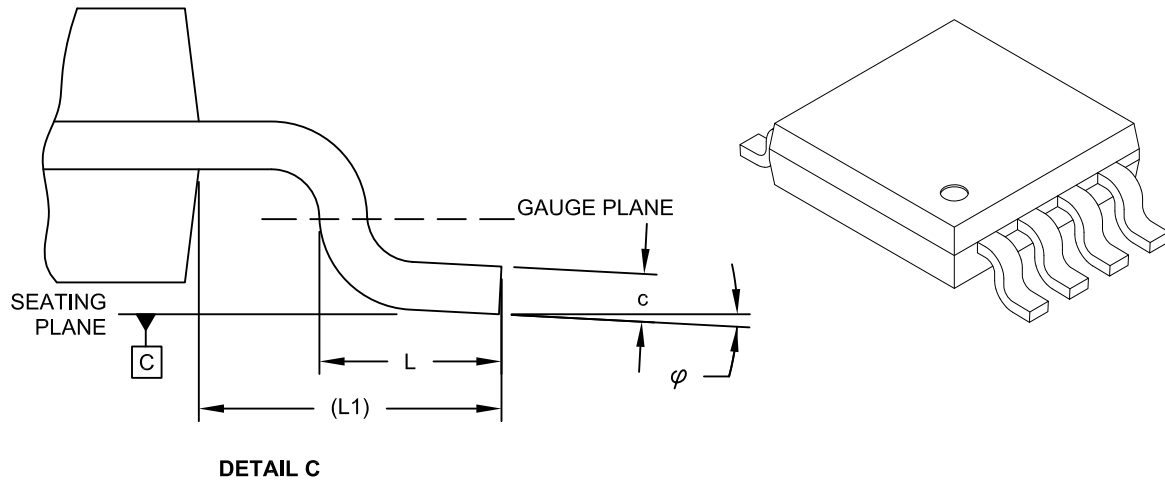

| Dimension Limits         | Units  | MILLIMETERS |      |      |
|--------------------------|--------|-------------|------|------|
|                          |        | MIN         | NOM  | MAX  |
| Number of Pins           | N      |             | 8    |      |
| Pitch                    | e      | 0.65 BSC    |      |      |
| Overall Height           | A      | -           | -    | 1.10 |
| Molded Package Thickness | A2     | 0.75        | 0.85 | 0.95 |
| Standoff                 | A1     | 0.00        | -    | 0.15 |
| Overall Width            | E      | 4.90 BSC    |      |      |
| Molded Package Width     | E1     | 3.00 BSC    |      |      |
| Overall Length           | D      | 3.00 BSC    |      |      |
| Foot Length              | L      | 0.40        | 0.60 | 0.80 |
| Footprint                | L1     | 0.95 REF    |      |      |
| Foot Angle               | $\phi$ | 0°          | -    | 8°   |
| Lead Thickness           | c      | 0.08        | -    | 0.23 |
| Lead Width               | b      | 0.22        | -    | 0.40 |

**Notes:**


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-111C Sheet 2 of 2

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Micro Small Outline Package (MS) [MSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

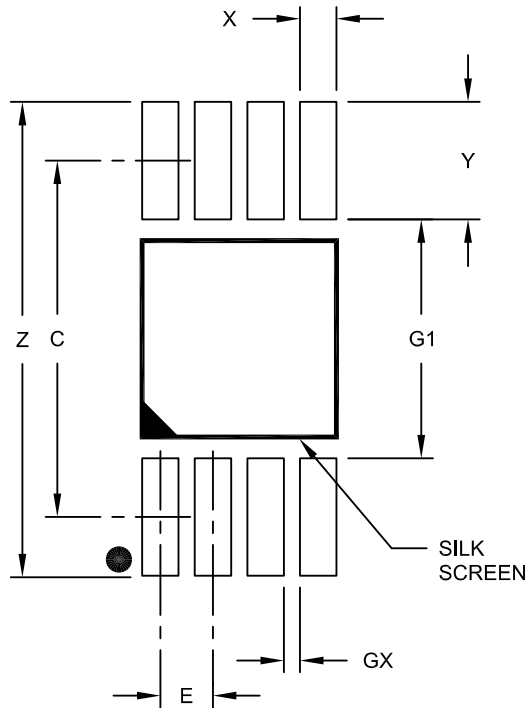

RECOMMENDED LAND PATTERN

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Contact Pitch           | E  | 0.65 BSC    |      |      |
| Contact Pad Spacing     | C  |             | 4.40 |      |
| Overall Width           | Z  |             |      | 5.85 |
| Contact Pad Width (X8)  | X1 |             |      | 0.45 |
| Contact Pad Length (X8) | Y1 |             |      | 1.45 |
| Distance Between Pads   | G1 | 2.95        |      |      |
| Distance Between Pads   | GX | 0.20        |      |      |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2111A

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

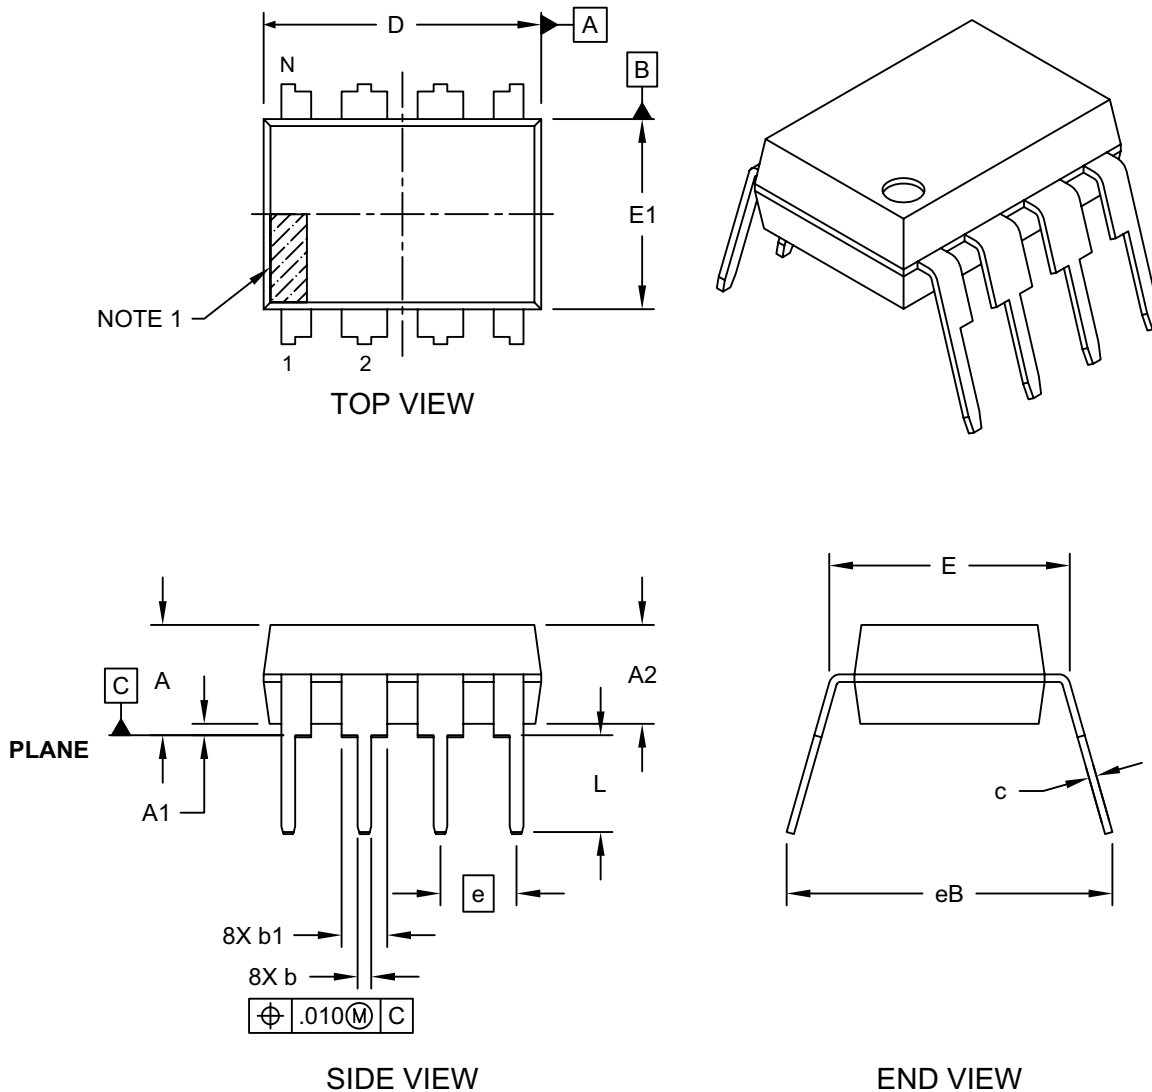


Microchip Technology Drawing No. C04-018D Sheet 1 of 2

## 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### ALTERNATE LEAD DESIGN (VENDOR DEPENDENT)

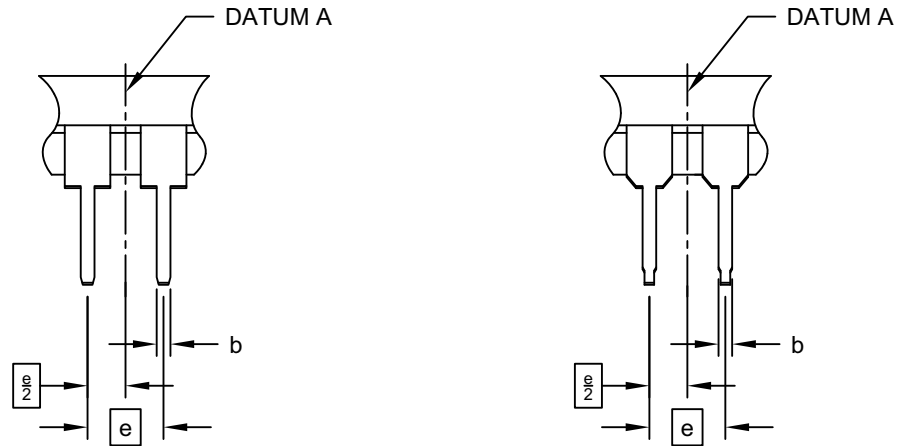

| Units                      |    | INCHES   |      |      |
|----------------------------|----|----------|------|------|
| Dimension Limits           |    | MIN      | NOM  | MAX  |
| Number of Pins             | N  | 8        |      |      |
| Pitch                      | e  | .100 BSC |      |      |
| Top to Seating Plane       | A  | -        | -    | .210 |
| Molded Package Thickness   | A2 | .115     | .130 | .195 |
| Base to Seating Plane      | A1 | .015     | -    | -    |
| Shoulder to Shoulder Width | E  | .290     | .310 | .325 |
| Molded Package Width       | E1 | .240     | .250 | .280 |
| Overall Length             | D  | .348     | .365 | .400 |
| Tip to Seating Plane       | L  | .115     | .130 | .150 |
| Lead Thickness             | c  | .008     | .010 | .015 |
| Upper Lead Width           | b1 | .040     | .060 | .070 |
| Lower Lead Width           | b  | .014     | .018 | .022 |
| Overall Row Spacing        | §  | eB       | -    | .430 |

#### Notes:


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-018D Sheet 2 of 2

## 5-Lead Plastic Small Outline Transistor (LT) [SC70]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

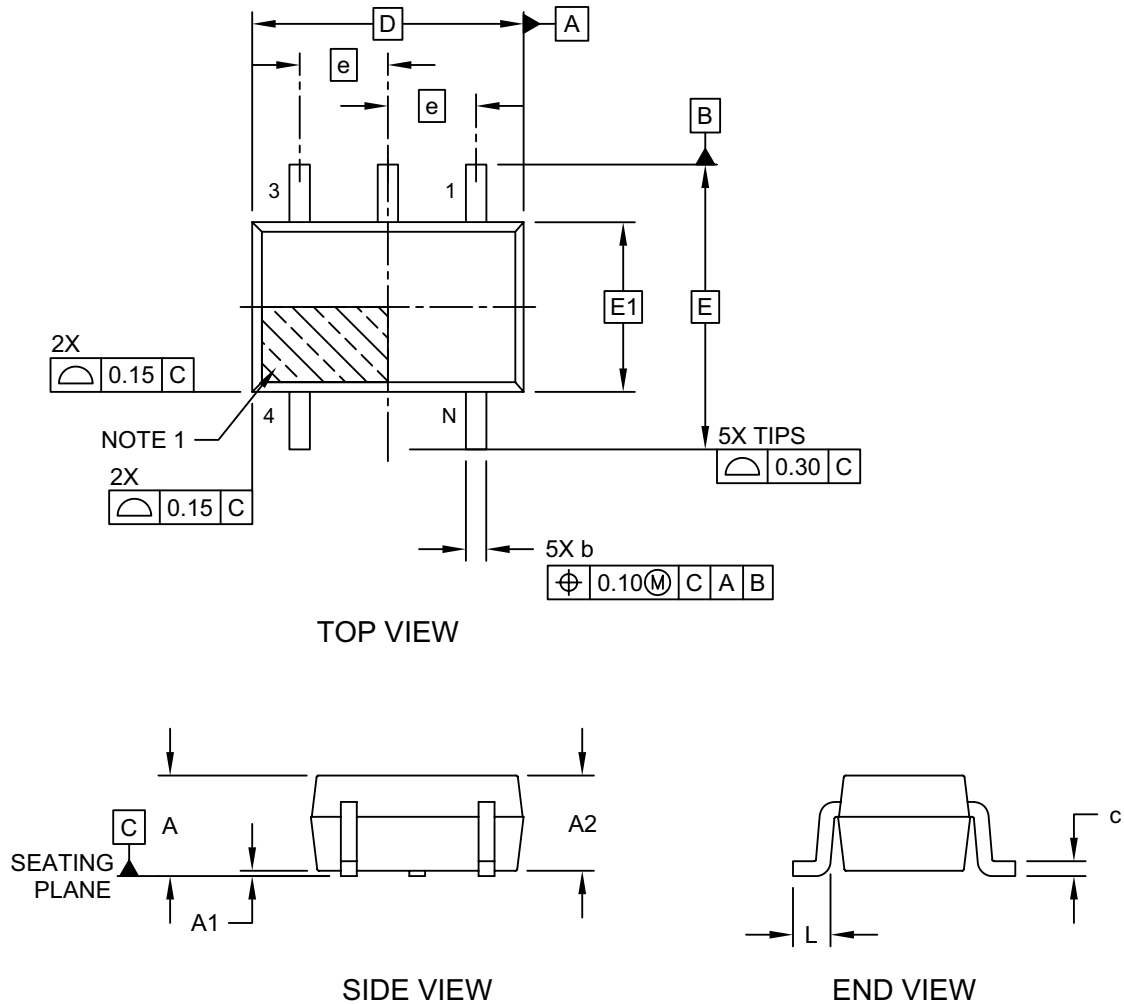

# 24AA01/24LC01B/24FC01

## 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

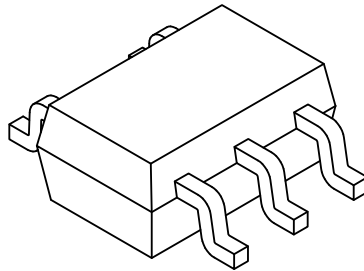

| Units                    |    | MILLIMETERS |      |      |
|--------------------------|----|-------------|------|------|
| Dimension Limits         |    | MIN         | NOM  | MAX  |
| Number of Pins           | N  | 5           |      |      |
| Pitch                    | e  | 0.65 BSC    |      |      |
| Overall Height           | A  | 0.80        | -    | 1.10 |
| Standoff                 | A1 | 0.00        | -    | 0.10 |
| Molded Package Thickness | A2 | 0.80        | -    | 1.00 |
| Overall Length           | D  | 2.00 BSC    |      |      |
| Exposed Pad Length       | D2 | 2.50        | 2.60 | 2.70 |
| Overall Width            | E  | 2.10 BSC    |      |      |
| Exposed Pad Width        | E1 | 1.25 BSC    |      |      |
| Terminal Width           | b  | 0.15        | -    | 0.40 |
| Terminal Length          | L  | 0.10        | 0.20 | 0.46 |
| Lead Thickness           | c  | 0.08        | -    | 0.26 |

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
3. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-061D Sheet 2 of 2

## 5-Lead Plastic Small Outline Transistor (LT) [SC70]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

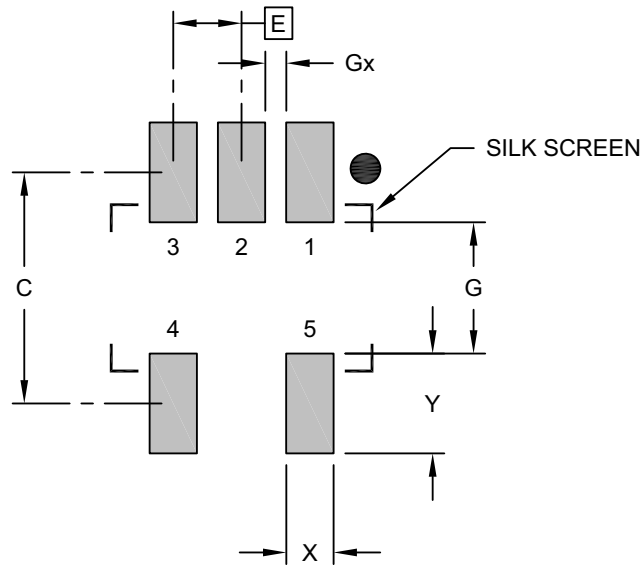

### RECOMMENDED LAND PATTERN

| Units                 |    | MILLIMETERS |          |      |
|-----------------------|----|-------------|----------|------|
| Dimension Limits      |    | MIN         | NOM      | MAX  |
| Contact Pitch         | E  |             | 0.65 BSC |      |
| Contact Pad Spacing   | C  |             | 2.20     |      |
| Contact Pad Width     | X  |             |          | 0.45 |
| Contact Pad Length    | Y  |             |          | 0.95 |
| Distance Between Pads | G  | 1.25        |          |      |
| Distance Between Pads | Gx | 0.20        |          |      |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2061B

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm (.150 In.) Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

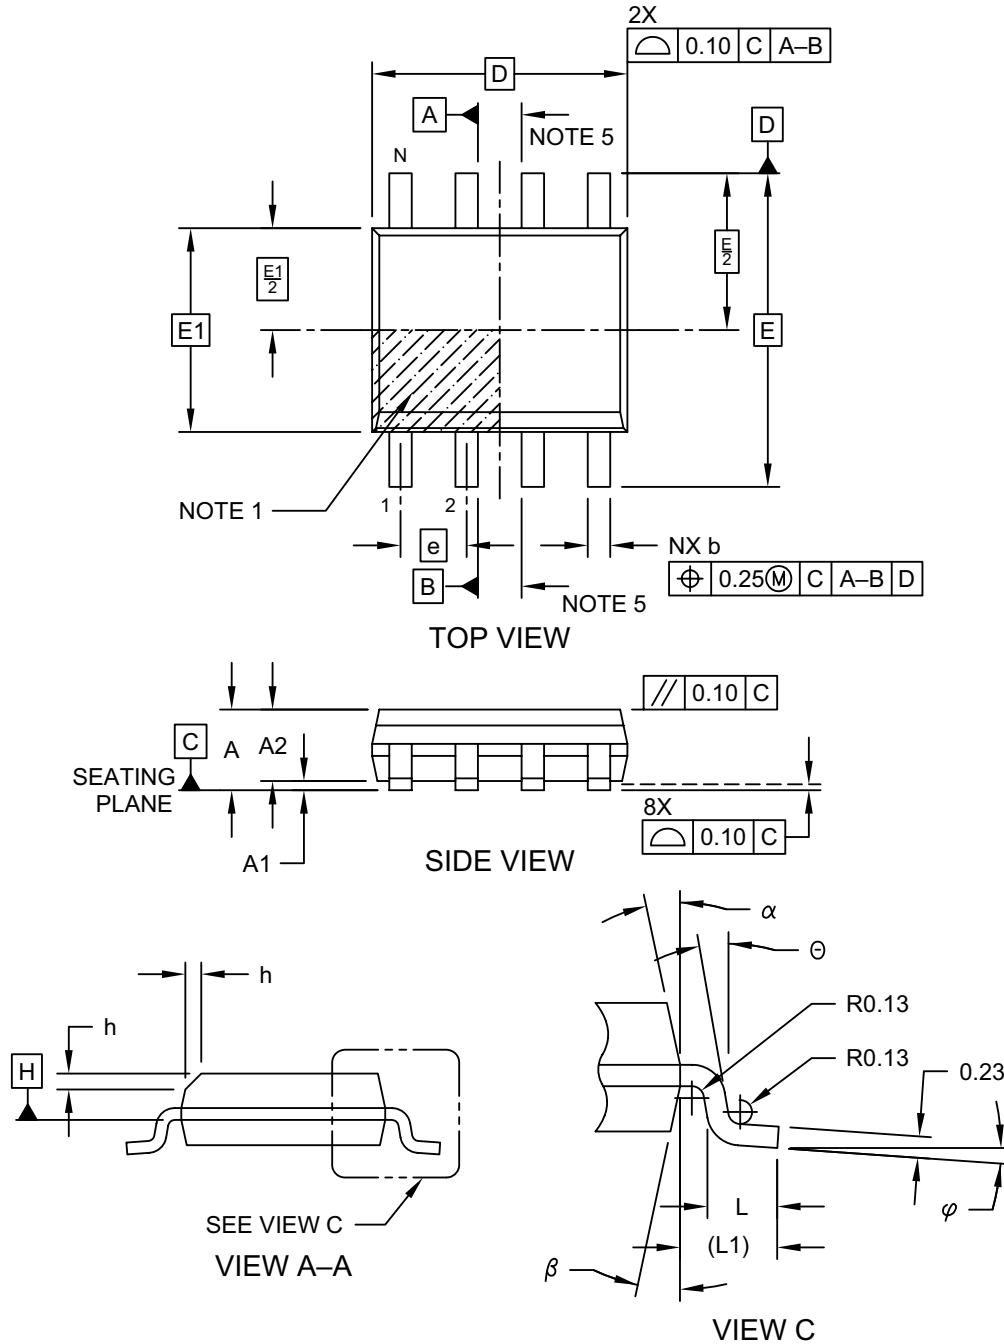


Microchip Technology Drawing No. C04-057-SN Rev D Sheet 1 of 2

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm (.150 In.) Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

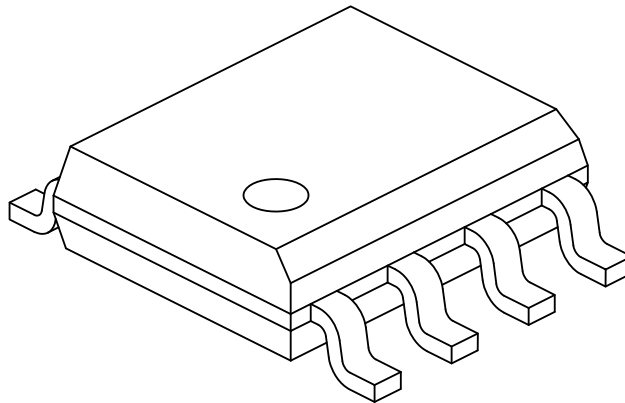

| Units                    |    | MILLIMETERS |     |      |
|--------------------------|----|-------------|-----|------|
| Dimension Limits         |    | MIN         | NOM | MAX  |
| Number of Pins           | N  | 8           |     |      |
| Pitch                    | e  | 1.27 BSC    |     |      |
| Overall Height           | A  | -           | -   | 1.75 |
| Molded Package Thickness | A2 | 1.25        | -   | -    |
| Standoff §               | A1 | 0.10        | -   | 0.25 |
| Overall Width            | E  | 6.00 BSC    |     |      |
| Molded Package Width     | E1 | 3.90 BSC    |     |      |
| Overall Length           | D  | 4.90 BSC    |     |      |
| Chamfer (Optional)       | h  | 0.25        | -   | 0.50 |
| Foot Length              | L  | 0.40        | -   | 1.27 |
| Footprint                | L1 | 1.04 REF    |     |      |
| Foot Angle               | φ  | 0°          | -   | 8°   |
| Lead Thickness           | c  | 0.17        | -   | 0.25 |
| Lead Width               | b  | 0.31        | -   | 0.51 |
| Mold Draft Angle Top     | α  | 5°          | -   | 15°  |
| Mold Draft Angle Bottom  | β  | 5°          | -   | 15°  |

**Notes:**


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.
- Datums A & B to be determined at Datum H.

Microchip Technology Drawing No. C04-057-SN Rev D Sheet 2 of 2

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Small Outline (SN) - Narrow, 3.90 mm Body [SOIC]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

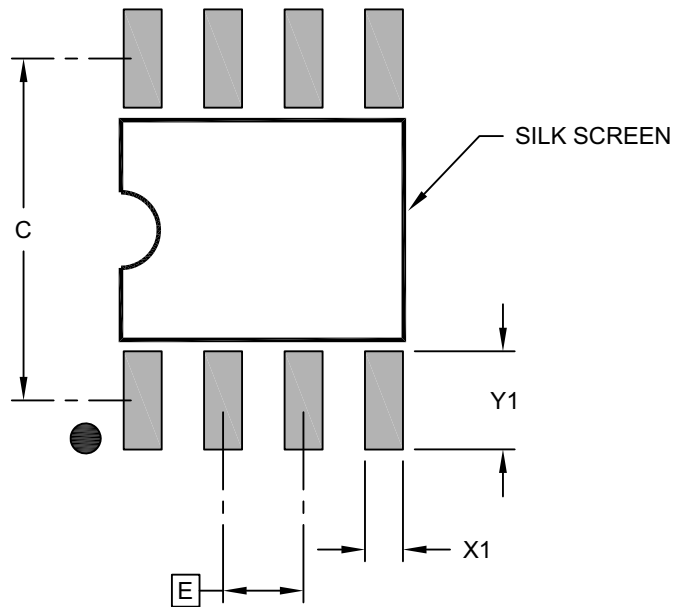

### RECOMMENDED LAND PATTERN

| Units                   |    | MILLIMETERS |          |      |
|-------------------------|----|-------------|----------|------|
| Dimension Limits        |    | MIN         | NOM      | MAX  |
| Contact Pitch           | E  |             | 1.27 BSC |      |
| Contact Pad Spacing     | C  |             | 5.40     |      |
| Contact Pad Width (X8)  | X1 |             |          | 0.60 |
| Contact Pad Length (X8) | Y1 |             |          | 1.55 |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2057-SN Rev B



## 5-Lead Plastic Small Outline Transistor (OT) [SOT23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

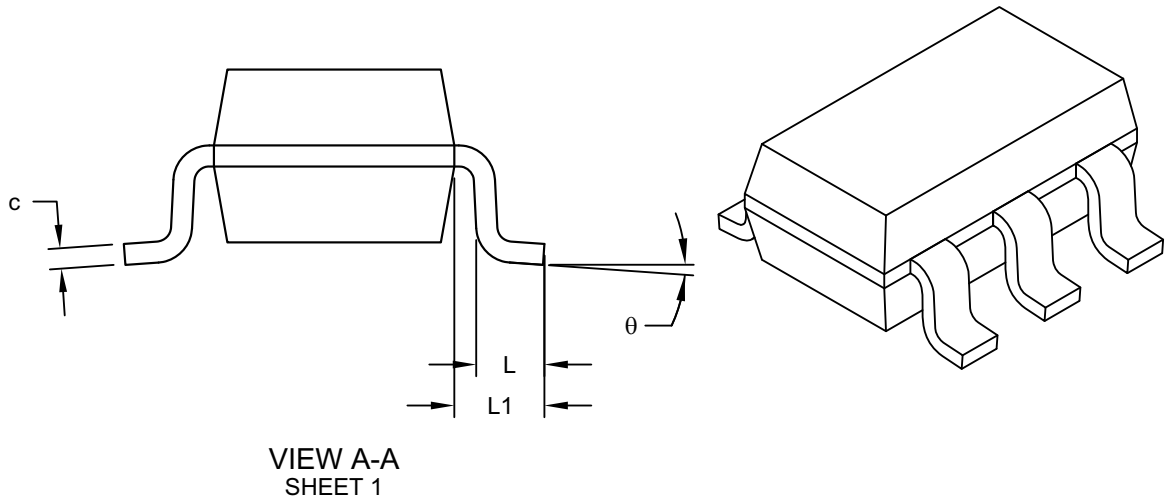

| Units                    |    | MILLIMETERS |     |      |
|--------------------------|----|-------------|-----|------|
| Dimension Limits         |    | MIN         | NOM | MAX  |
| Number of Pins           | N  | 6           |     |      |
| Pitch                    | e  | 0.95 BSC    |     |      |
| Outside lead pitch       | e1 | 1.90 BSC    |     |      |
| Overall Height           | A  | 0.90        | -   | 1.45 |
| Molded Package Thickness | A2 | 0.89        | -   | 1.30 |
| Standoff                 | A1 | -           | -   | 0.15 |
| Overall Width            | E  | 2.80 BSC    |     |      |
| Molded Package Width     | E1 | 1.60 BSC    |     |      |
| Overall Length           | D  | 2.90 BSC    |     |      |
| Foot Length              | L  | 0.30        | -   | 0.60 |
| Footprint                | L1 | 0.60 REF    |     |      |
| Foot Angle               | φ  | 0°          | -   | 10°  |
| Lead Thickness           | c  | 0.08        | -   | 0.26 |
| Lead Width               | b  | 0.20        | -   | 0.51 |


**Notes:**

- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-091D [OT] Sheet 2 of 2

## 5-Lead Plastic Small Outline Transistor (OT) [SOT23]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

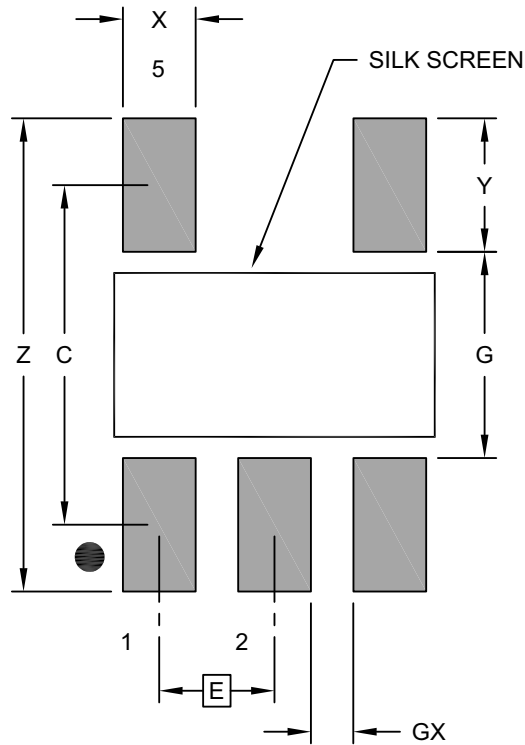

RECOMMENDED LAND PATTERN

| Dimension Limits        | Units | MILLIMETERS |      |      |
|-------------------------|-------|-------------|------|------|
|                         |       | MIN         | NOM  | MAX  |
| Contact Pitch           | E     | 0.95 BSC    |      |      |
| Contact Pad Spacing     | C     |             | 2.80 |      |
| Contact Pad Width (X5)  | X     |             |      | 0.60 |
| Contact Pad Length (X5) | Y     |             |      | 1.10 |
| Distance Between Pads   | G     | 1.70        |      |      |
| Distance Between Pads   | GX    | 0.35        |      |      |
| Overall Width           | Z     |             |      | 3.90 |

**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2091A [OT]

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

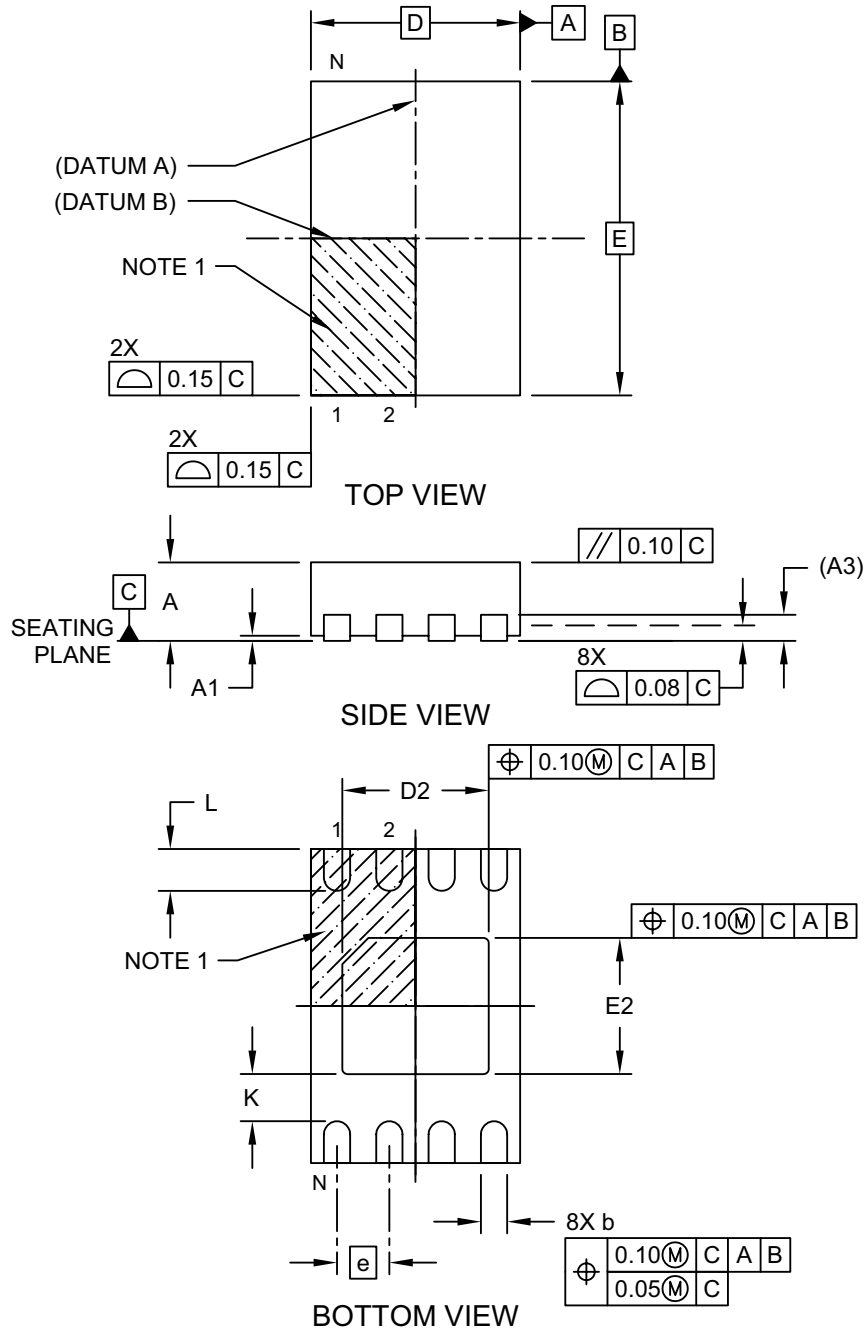


Microchip Technology Drawing No. C04-129-MNY Rev E Sheet 1 of 2

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

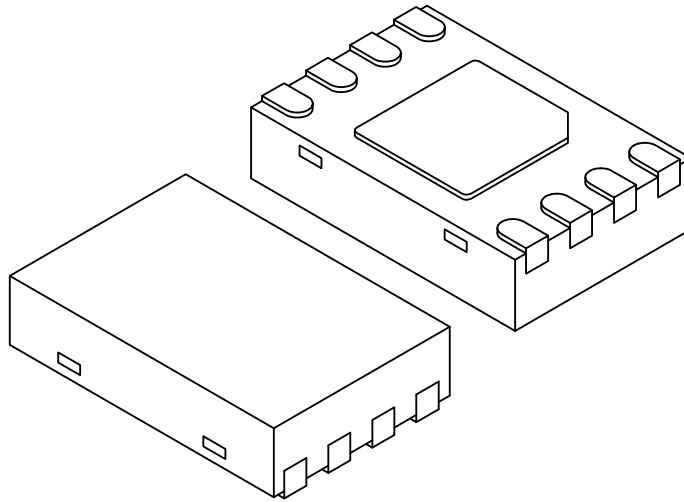

| Units                  |    | MILLIMETERS |      |      |
|------------------------|----|-------------|------|------|
| Dimension Limits       |    | MIN         | NOM  | MAX  |
| Number of Pins         | N  | 8           |      |      |
| Pitch                  | e  | 0.50 BSC    |      |      |
| Overall Height         | A  | 0.70        | 0.75 | 0.80 |
| Standoff               | A1 | 0.00        | 0.02 | 0.05 |
| Contact Thickness      | A3 | 0.20 REF    |      |      |
| Overall Length         | D  | 2.00 BSC    |      |      |
| Overall Width          | E  | 3.00 BSC    |      |      |
| Exposed Pad Length     | D2 | 1.35        | 1.40 | 1.45 |
| Exposed Pad Width      | E2 | 1.25        | 1.30 | 1.35 |
| Contact Width          | b  | 0.20        | 0.25 | 0.30 |
| Contact Length         | L  | 0.25        | 0.30 | 0.45 |
| Contact-to-Exposed Pad | K  | 0.20        | -    | -    |

### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package may have one or more exposed tie bars at ends.
3. Package is saw singulated
4. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing No. C04-129-MNY Rev E Sheet 2 of 2

## 8-Lead Plastic Dual Flat, No Lead Package (MNY) – 2x3x0.8 mm Body [TDFN] With 1.4x1.3 mm Exposed Pad (JEDEC Package type WDFN)

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

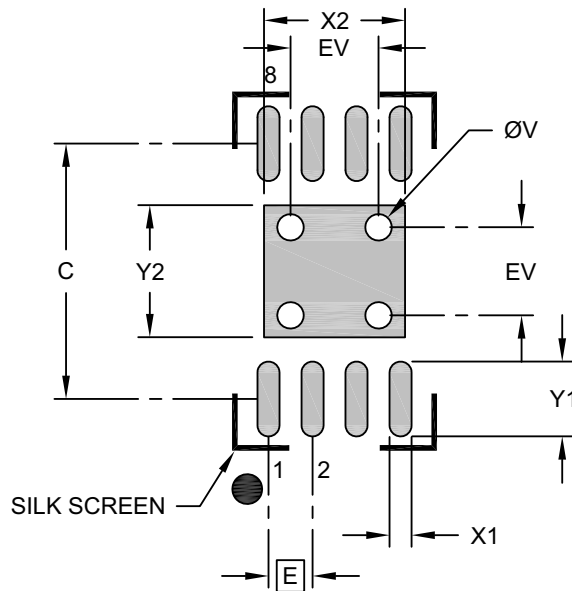

RECOMMENDED LAND PATTERN

| Units                      |    | MILLIMETERS |      |      |
|----------------------------|----|-------------|------|------|
| Dimension Limits           |    | MIN         | NOM  | MAX  |
| Contact Pitch              | E  | 0.50 BSC    |      |      |
| Optional Center Pad Width  | X2 |             |      | 1.60 |
| Optional Center Pad Length | Y2 |             |      | 1.50 |
| Contact Pad Spacing        | C  |             | 2.90 |      |
| Contact Pad Width (X8)     | X1 |             |      | 0.25 |
| Contact Pad Length (X8)    | Y1 |             |      | 0.85 |
| Thermal Via Diameter       | V  |             | 0.30 |      |
| Thermal Via Pitch          | EV |             | 1.00 |      |


**Notes:**

1. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing No. C04-129-MNY Rev. B

## 8-Lead Plastic Thin Shrink Small Outline (ST) – 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

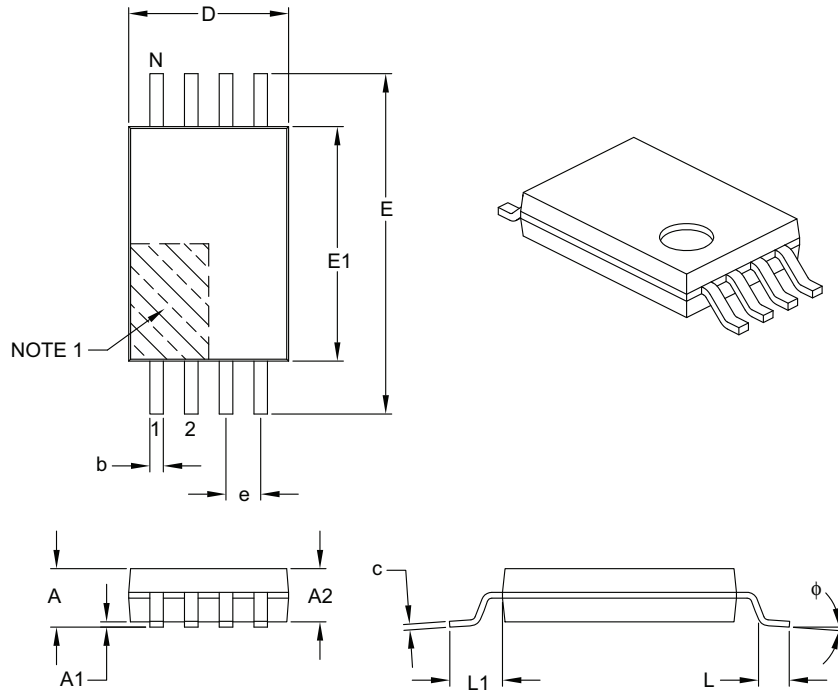

| Units                    |    | MILLIMETERS |      |      |
|--------------------------|----|-------------|------|------|
| Dimension Limits         |    | MIN         | NOM  | MAX  |
| Number of Pins           | N  | 8           |      |      |
| Pitch                    | e  | 0.65 BSC    |      |      |
| Overall Height           | A  | –           | –    | 1.20 |
| Molded Package Thickness | A2 | 0.80        | 1.00 | 1.05 |
| Standoff                 | A1 | 0.05        | –    | 0.15 |
| Overall Width            | E  | 6.40 BSC    |      |      |
| Molded Package Width     | E1 | 4.30        | 4.40 | 4.50 |
| Molded Package Length    | D  | 2.90        | 3.00 | 3.10 |
| Foot Length              | L  | 0.45        | 0.60 | 0.75 |
| Footprint                | L1 | 1.00 REF    |      |      |
| Foot Angle               | φ  | 0°          | –    | 8°   |
| Lead Thickness           | c  | 0.09        | –    | 0.20 |
| Lead Width               | b  | 0.19        | –    | 0.30 |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-086B

# 24AA01/24LC01B/24FC01

## 8-Lead Plastic Thin Shrink Small Outline (ST) - 4.4 mm Body [TSSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

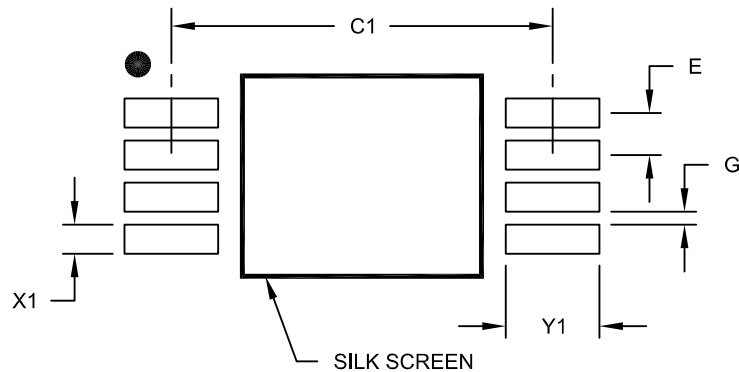

### RECOMMENDED LAND PATTERN

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Contact Pitch           | E  | 0.65 BSC    |      |      |
| Contact Pad Spacing     | C1 |             | 5.90 |      |
| Contact Pad Width (X8)  | X1 |             |      | 0.45 |
| Contact Pad Length (X8) | Y1 |             |      | 1.45 |
| Distance Between Pads   | G  | 0.20        |      |      |

#### Notes:

1. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2086A

# 24AA01/24LC01B/24FC01

## 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy YNZ Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

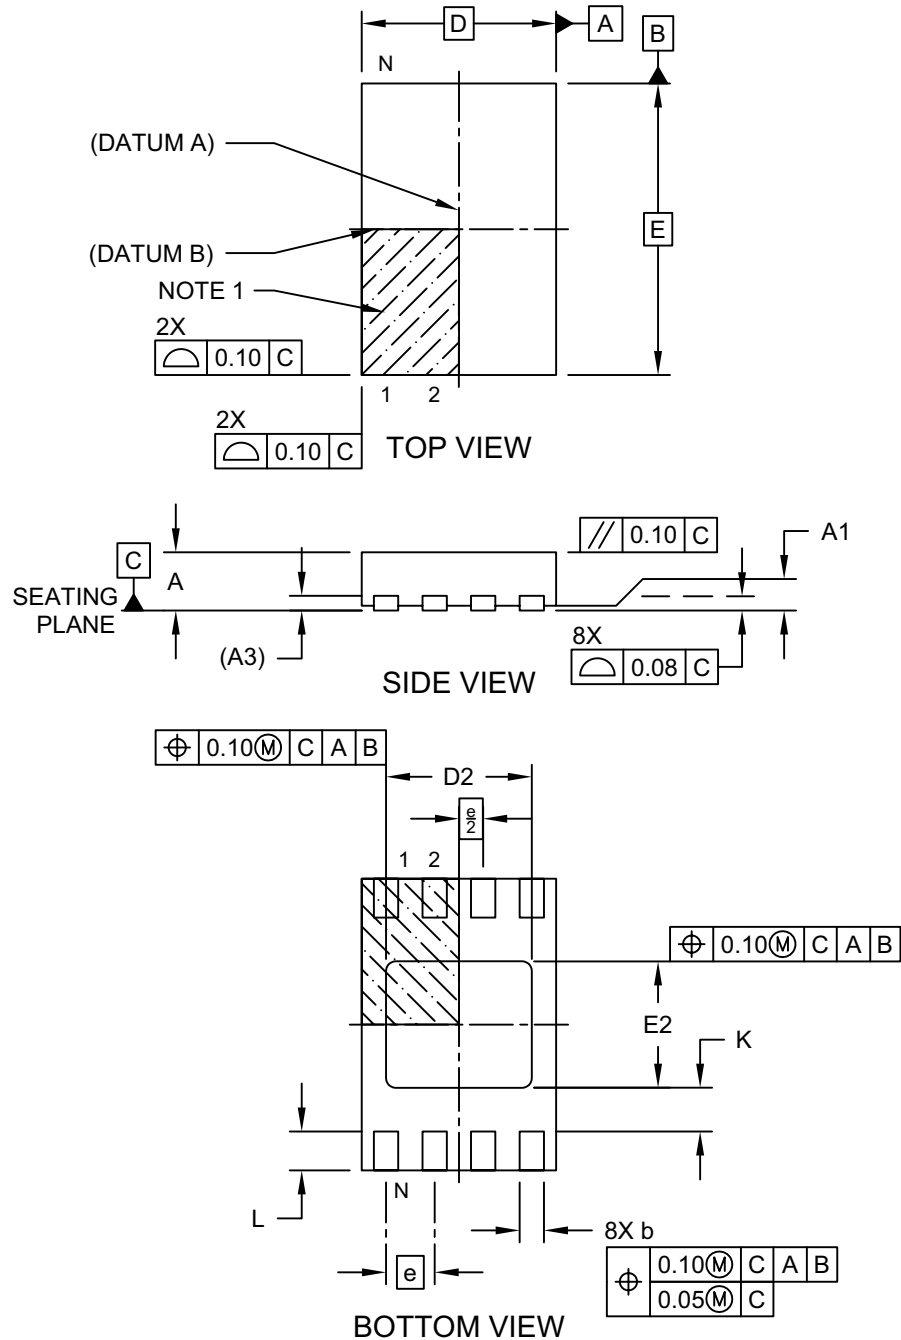


Microchip Technology Drawing C04-21355-Q4B Rev A Sheet 1 of 2

# 24AA01/24LC01B/24FC01

## 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy YNZ Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

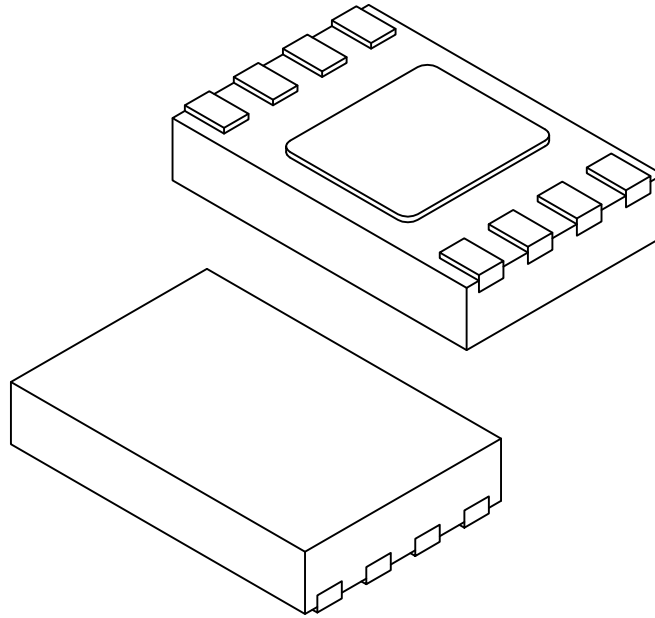

| Units                   |    | MILLIMETERS |      |      |
|-------------------------|----|-------------|------|------|
| Dimension Limits        |    | MIN         | NOM  | MAX  |
| Number of Terminals     | N  | 8           |      |      |
| Pitch                   | e  | 0.50 BSC    |      |      |
| Overall Height          | A  | 0.50        | 0.55 | 0.60 |
| Standoff                | A1 | 0.00        | 0.02 | 0.05 |
| Terminal Thickness      | A3 | 0.152 REF   |      |      |
| Overall Length          | D  | 2.00 BSC    |      |      |
| Exposed Pad Length      | D2 | 1.40        | 1.50 | 1.60 |
| Overall Width           | E  | 3.00 BSC    |      |      |
| Exposed Pad Width       | E2 | 1.20        | 1.30 | 1.40 |
| Terminal Width          | b  | 0.18        | 0.25 | 0.30 |
| Terminal Length         | L  | 0.35        | 0.40 | 0.45 |
| Terminal-to-Exposed-Pad | K  | 0.20        | -    | -    |


### Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21355-Q4B Rev A Sheet 2 of 2

## 8-Lead Ultra Thin Plastic Dual Flat, No Lead Package (Q4B) - 2x3 mm Body [UDFN] Atmel Legacy YNZ Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

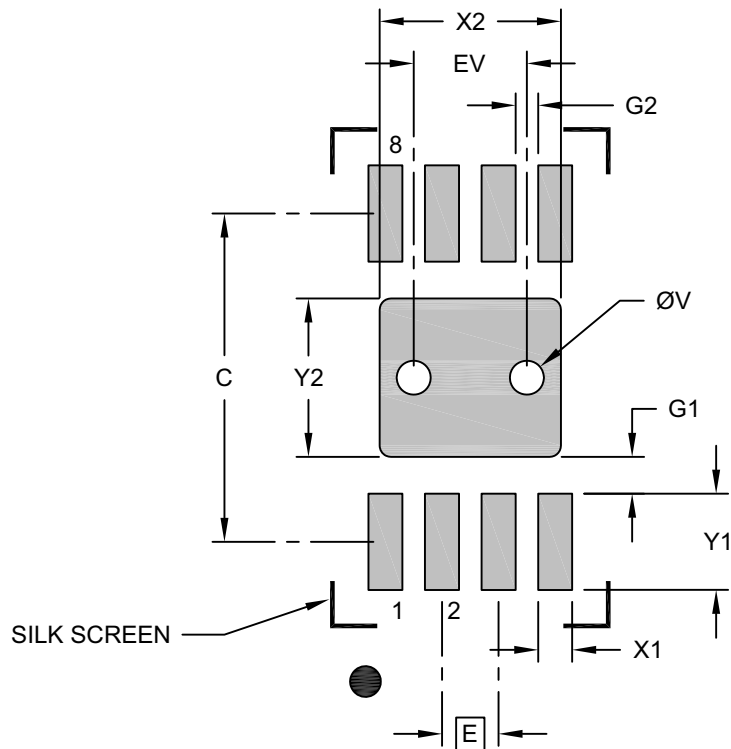

RECOMMENDED LAND PATTERN

|                                 |    | Units | MILLIMETERS |      |      |
|---------------------------------|----|-------|-------------|------|------|
| Dimension Limits                |    |       | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  |       | 0.50 BSC    |      |      |
| Optional Center Pad Width       | X2 |       |             |      | 1.60 |
| Optional Center Pad Length      | Y2 |       |             |      | 1.40 |
| Contact Pad Spacing             | C  |       |             | 2.90 |      |
| Contact Pad Width (X8)          | X1 |       |             |      | 0.30 |
| Contact Pad Length (X8)         | Y1 |       |             |      | 0.85 |
| Contact Pad to Center Pad (X8)  | G1 | 0.20  |             |      |      |
| Contact Pad to Contact Pad (X6) | G2 | 0.33  |             |      |      |
| Thermal Via Diameter            | V  |       |             | 0.30 |      |
| Thermal Via Pitch               | EV |       |             | 1.00 |      |

**Notes:**

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-21355-Q4B Rev A

## APPENDIX A: REVISION HISTORY

### Revision L (05/2019)

Corrected Part Marking for UDFN package. Added note about exposed pad on the TDFN and UDFN packages.

### Revision K (11/2018)

Added the 24FC01 device.

### Revision J (01/2009)

Added TDFN Package; Updated Package Drawings.

### Revision H (08/2008)

Added SC-70 Package; Updated Package Drawings.

### Revision G (03/2007)

Replaced Package Drawings (Rev. AM).

### Revision F (01/2007)

Revised Device Selection Table; Revised Features Section; Changed 1.8V to 1.7V; Revised Table 1-1, 1-2, 8-1; Replaced Package Drawings; Revised Product ID System.

### Revision E

Revised Figure 3-2 Control Byte Allocation; Figure 4-1 Byte Write; Figure 4-2 Page Write; Section 6.0 Write Protection; Figure 7-1 Current Address Read; Figure 7-2 Random Read; Figure 7-3 Sequential Read.

### Revision D

Added DFN package.

### Revision C

Corrections to Section 1.0, Electrical Characteristics and Section 9.1, 24LC01B standard marking code.

## THE MICROCHIP WEBSITE

Microchip provides online support via our website at [www.microchip.com](http://www.microchip.com). This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the website at: <http://microchip.com/support>**

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <u>/X1<sup>(1)</sup></u>                                                                                      | <u>-X</u>                                                                                      | <u>/XX</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Tape and Reel Option                                                                                          | Temperature Range                                                                              | Package                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Device:</b><br>24AA01: = 1.7V, 1 Kbit I <sup>2</sup> C Serial EEPROM<br>24LC01B: = 2.5V, 1 Kbit I <sup>2</sup> C Serial EEPROM<br>24FC01: = 1.7V, High Speed, 1 Kbit I <sup>2</sup> C Serial EEPROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>Tape and Reel Option:</b><br>Blank = Standard packaging (tube or tray)<br>T = Tape and Reel <sup>(1)</sup> | <b>Temperature Range:</b><br>I = -40°C to +85°C (Industrial)<br>E = -40°C to +125°C (Extended) | <b>Package:</b><br>MC = Plastic Dual Flat, No Lead Package – 2x3x0.9mm, Body, 8-lead (DFN)<br>MS = Plastic Micro Small Outline Package, 8-lead (MSOP)<br>P = Plastic Dual In-Line – 300 mil Body, 8-lead (PDIP)<br>LT = Plastic Small Outline Transistor, 5-lead (SC-70) (Tape and Reel only)<br>SN = Plastic Small Outline - Narrow, 3.90 mm Body, 8-lead (SOIC)<br>OT = Plastic Small Outline Transistor, 5-lead (SOT-23) (Tape and Reel only)<br>MNY = Plastic Dual Flat, No Lead Package - 2x3x0.8 mm Body, 8-lead (TDFN)<br>ST = Plastic Thin Shrink Small Outline – 4.4 mm, 8-lead (TSSOP)<br>MUY = Plastic Dual Flat, No Lead Package - 2x3x0.6 mm Body, 8-lead (UDFN) |
| <b>Examples:</b><br>a) 24LC01BT-E/MC: Tape and Reel, Extended Temperature, 2.5V, DFN package.<br>b) 24LC01BT-I/MS: Tape and Reel, Industrial Temperature, 2.5V, MSOP package.<br>c) 24AA01-I/P: Industrial Temperature, 1.7V, PDIP package.<br>d) 24LC01BT-I/LT: Tape and Reel, Industrial Temperature, 2.5V, SC-70 package.<br>e) 24AA01-I/SN: Industrial Temperature, 1.7V, SOIC package.<br>f) 24AA01T-I/OT: Tape and Reel, Industrial Temperature, 1.7V, SOT-23 package.<br>g) 24AA01T-I/MNY: Tape and Reel, Industrial Temperature, 1.7V, TDFN package.<br>h) 24AA01T-I/ST: Tape and Reel, Industrial Temperature, 1.7V, TSSOP package.<br>i) 24FC01-I/P: Industrial Temperature, 1.7V, PDIP package.<br>j) 24FC01T-I/MUY: Tape and Reel, Industrial Temperature, 1.7V, UDFN package. |                                                                                                               |                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Note 1:</b> Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.<br><br><b>2:</b> Contact Microchip for Automotive grade ordering part numbers.                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                               |                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949 ==**

**Trademarks**

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KeeLoq, Kleeer, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KleeerNet, KleeerNet logo, memBrain, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019, Microchip Technology Incorporated, All Rights Reserved.  
ISBN: 978-1-5224-4475-6

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
 2355 West Chandler Blvd.  
 Chandler, AZ 85224-6199  
 Tel: 480-792-7200  
 Fax: 480-792-7277  
 Technical Support:  
<http://www.microchip.com/support>  
 Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
 Duluth, GA  
 Tel: 678-957-9614  
 Fax: 678-957-1455

**Austin, TX**  
 Tel: 512-257-3370

**Boston**  
 Westborough, MA  
 Tel: 774-760-0087  
 Fax: 774-760-0088

**Chicago**  
 Itasca, IL  
 Tel: 630-285-0071  
 Fax: 630-285-0075

**Dallas**  
 Addison, TX  
 Tel: 972-818-7423  
 Fax: 972-818-2924

**Detroit**  
 Novi, MI  
 Tel: 248-848-4000

**Houston, TX**  
 Tel: 281-894-5983

**Indianapolis**  
 Noblesville, IN  
 Tel: 317-773-8323  
 Fax: 317-773-5453  
 Tel: 317-536-2380

**Los Angeles**  
 Mission Viejo, CA  
 Tel: 949-462-9523  
 Fax: 949-462-9608  
 Tel: 951-273-7800

**Raleigh, NC**  
 Tel: 919-844-7510

**New York, NY**  
 Tel: 631-435-6000

**San Jose, CA**  
 Tel: 408-735-9110  
 Tel: 408-436-4270

**Canada - Toronto**  
 Tel: 905-695-1980  
 Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
 Tel: 61-2-9868-6733

**China - Beijing**  
 Tel: 86-10-8569-7000

**China - Chengdu**  
 Tel: 86-28-8665-5511

**China - Chongqing**  
 Tel: 86-23-8980-9588

**China - Dongguan**  
 Tel: 86-769-8702-9880

**China - Guangzhou**  
 Tel: 86-20-8755-8029

**China - Hangzhou**  
 Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
 Tel: 852-2943-5100

**China - Nanjing**  
 Tel: 86-25-8473-2460

**China - Qingdao**  
 Tel: 86-532-8502-7355

**China - Shanghai**  
 Tel: 86-21-3326-8000

**China - Shenyang**  
 Tel: 86-24-2334-2829

**China - Shenzhen**  
 Tel: 86-755-8864-2200

**China - Suzhou**  
 Tel: 86-186-6233-1526

**China - Wuhan**  
 Tel: 86-27-5980-5300

**China - Xian**  
 Tel: 86-29-8833-7252

**China - Xiamen**  
 Tel: 86-592-2388138

**China - Zhuhai**  
 Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
 Tel: 91-80-3090-4444

**India - New Delhi**  
 Tel: 91-11-4160-8631

**India - Pune**  
 Tel: 91-20-4121-0141

**Japan - Osaka**  
 Tel: 81-6-6152-7160

**Japan - Tokyo**  
 Tel: 81-3-6880-3770

**Korea - Daegu**  
 Tel: 82-53-744-4301

**Korea - Seoul**  
 Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
 Tel: 60-3-7651-7906

**Malaysia - Penang**  
 Tel: 60-4-227-8870

**Philippines - Manila**  
 Tel: 63-2-634-9065

**Singapore**  
 Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
 Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
 Tel: 886-7-213-7830

**Taiwan - Taipei**  
 Tel: 886-2-2508-8600

**Thailand - Bangkok**  
 Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
 Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
 Tel: 43-7242-2244-39  
 Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
 Tel: 45-4450-2828  
 Fax: 45-4485-2829

**Finland - Espoo**  
 Tel: 358-9-4520-820

**France - Paris**  
 Tel: 33-1-69-53-63-20  
 Fax: 33-1-69-30-90-79

**Germany - Garching**  
 Tel: 49-8931-9700

**Germany - Haan**  
 Tel: 49-2129-3766400

**Germany - Heilbronn**  
 Tel: 49-7131-67-3636

**Germany - Karlsruhe**  
 Tel: 49-721-625370

**Germany - Munich**  
 Tel: 49-89-627-144-0  
 Fax: 49-89-627-144-44

**Germany - Rosenheim**  
 Tel: 49-8031-354-560

**Israel - Ra'anana**  
 Tel: 972-9-744-7705

**Italy - Milan**  
 Tel: 39-0331-742611  
 Fax: 39-0331-466781

**Italy - Padova**  
 Tel: 39-049-7625286

**Netherlands - Drunen**  
 Tel: 31-416-690399  
 Fax: 31-416-690340

**Norway - Trondheim**  
 Tel: 47-7288-4388

**Poland - Warsaw**  
 Tel: 48-22-3325737

**Romania - Bucharest**  
 Tel: 40-21-407-87-50

**Spain - Madrid**  
 Tel: 34-91-708-08-90  
 Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
 Tel: 46-31-704-60-40

**Sweden - Stockholm**  
 Tel: 46-8-5090-4654

**UK - Wokingham**  
 Tel: 44-118-921-5800  
 Fax: 44-118-921-5820