

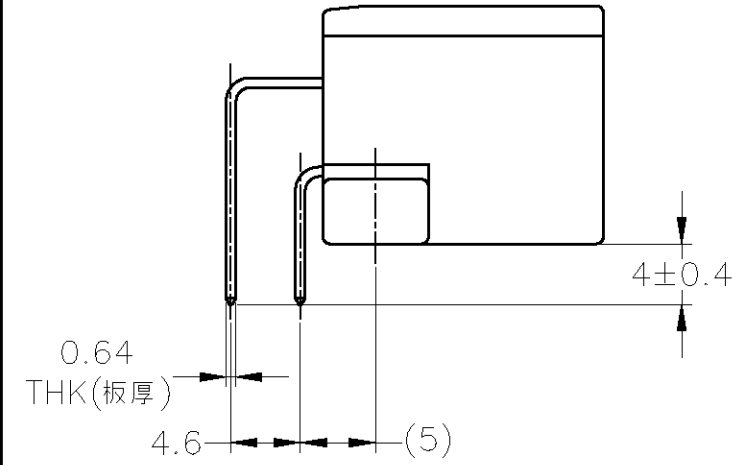
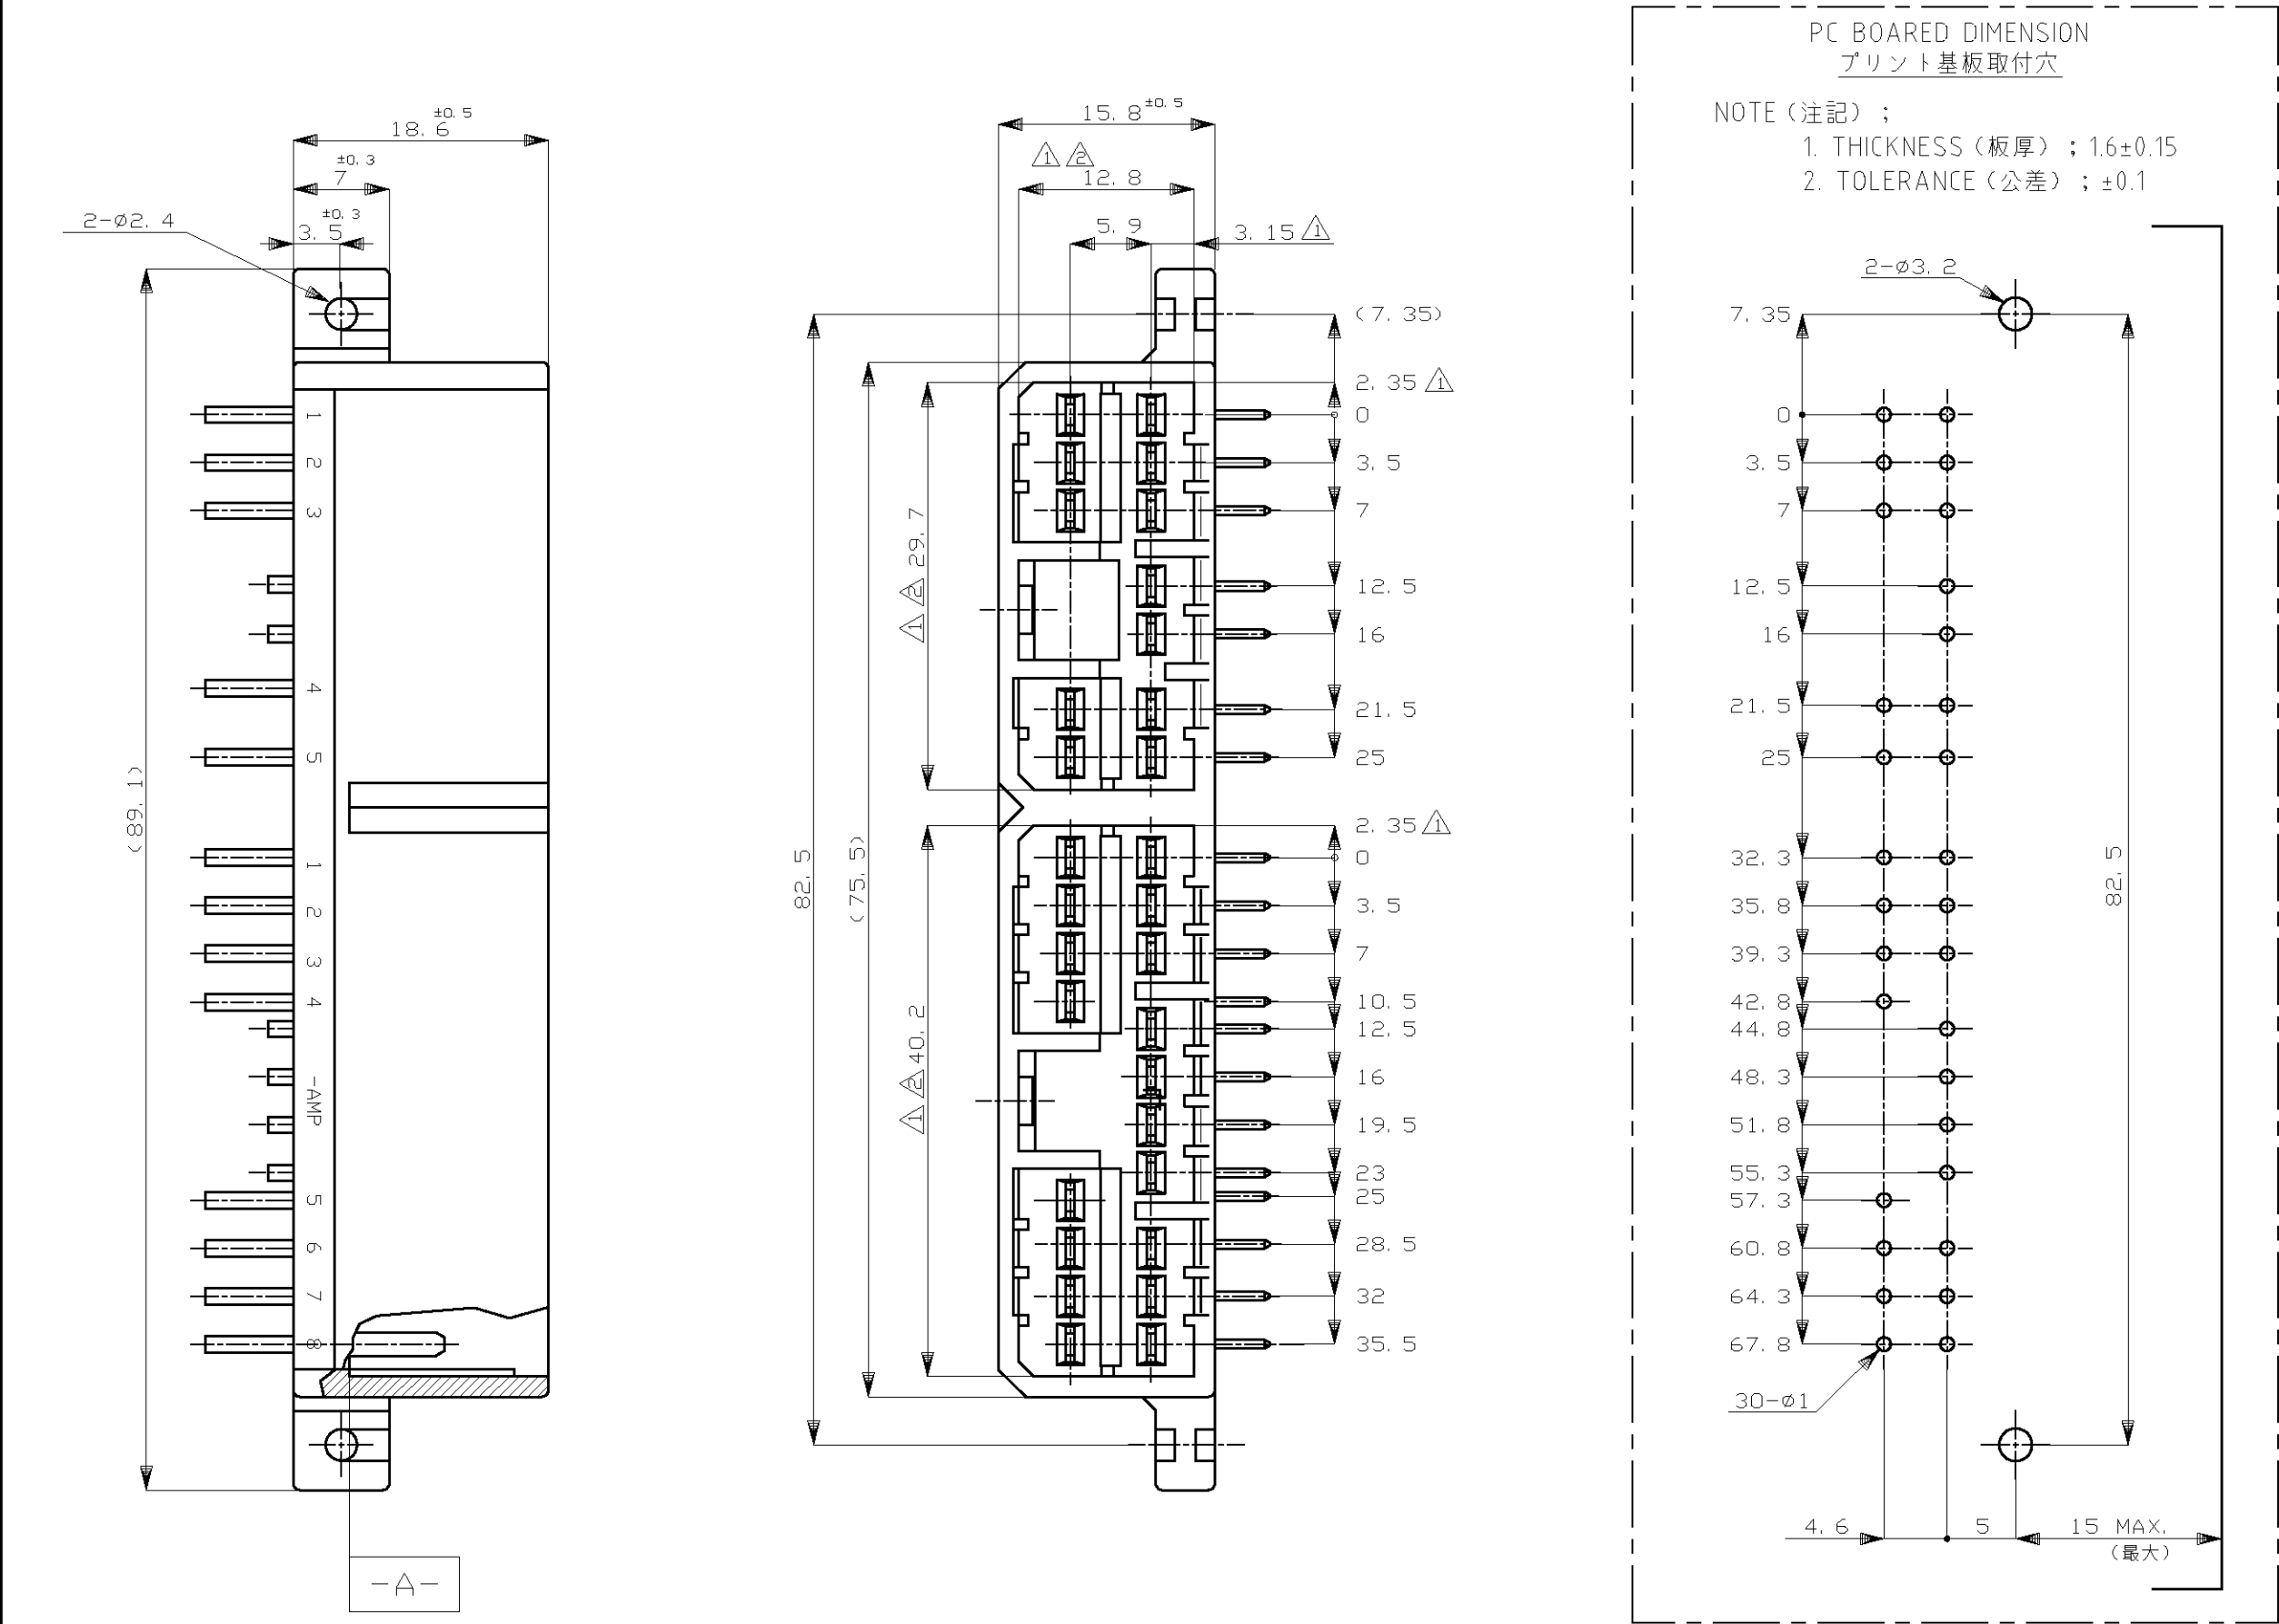


LOC	DIST	REVISES						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	—		H3	REVISED	ECR-08-031766	10DEC08	SF	KB

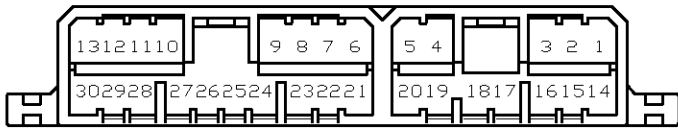

- △ -Z- 面より2mmの範囲で測定。
- △ 相手ハウジングと所定の機能を満足して嵌合できること
- 3. プリント基板への取付は、JIS B1115又は1122 M3×6ナベ（2種又は4種）のタッピンネジで締付けた後ハンダ付する（締付けトルク：0.4N-m 以下）
- △ 回路番号：下図参照のこと。
- △ TO BE MEASURED BETWEEN -Z- AND 2
- △ TO BE MATE WITH PLUG HSG SMOOTHLY
- 3. TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER
- △ CIRCUIT NUMBER.



HB	1~30 (全極)	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD	WHITE	2-5173866-1
	1~30 (全極)	TIN-LEAD	SELECTIVE GOLD	GREEN	2-173866-4
	SEE 4-173866-2				4-173866-2
	SEE 4-173866-1				4-173866-1
V-2		PRE-TIN		WHITE	9-173866-1
HB	1~30 (全極)	TIN-LEAD	SELECTIVE GOLD	WHITE	2-173866-1
		PRE-TIN		GRAY	173866-6
		PRE-TIN		GREEN	173866-4
		PRE-TIN		WHITE	173866-1
FLAMMABILITY OF MATERIAL 使用材料難燃グレード	金めっきタブ回路NO. SELECTIVE GOLD CIRCUIT NO. 	SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	色 COLOR	型番 PART NUMBER
		CONTACT 仕上げ FINISH OF CONTACT			
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA 19SEP03	 Tyco Electronics Corporation Kawasaki, Japan		
DIMENSIONS: 単位: 特 mm		CHK K.BETSUI 19SEP03			
	TOLERANCES, UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K.BETSUI 19SEP03	NAME 名称 070 SERIES MULTI-LOCK I/O CONNECTOR 30POSITION CAP HOUSING ASSEMBLY		
		PRODUCT SPEC 製品規格 108-5216			
MATERIAL 材料	FINISH 仕上	APPLICATION SPEC 取付適用規格	RESTRICTED TO		
		SEE TABLE			
HOUSING: PBT CONTACT: BRASS		WEIGHT 16.4g	A2 00779 C-173866		
CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 OF 1	REV H3	